

规格承认书

SPECIFICATION

客户(Customer)

客户型号

AI150430

产品类型

WIFI MODULE

产品型号

ESP-12

认证型号

确认签名，并返回一份。

PLEASE RETURN TO US COPY OF “SPECIFICATION FOR APPROVAL” WITH YOUR APPROVED SIGNATURES.

	"√"	客户签署 CUSTOMER'S SIGNATURE	备注 NOTE
合格 CHECK OUT			
不合格 REJECTED			
客户签章 CUSTOMER REFERENCE			

深圳市安信可科技有限公司

SHENZHEN Anxinke TECHNOLOGY CO.,LTD.

地址：深圳市宝安区西乡街道固戍二路万力华工业区 B 栋

Add: 5A, B Building, Wanlihua Industrial Park, Gushu 2 RD, Xixiang Street, Baoan district, Shenzhen, China

电话 (TEL) :86-0755-61195786

传真 (FAX) :86-0755-61195776

[Http://www.ai-thinker.com](http://www.ai-thinker.com)

规格修改记录 (SPECIFICATION CHANGE HISTORY)

编号	修订日期	修订内容	修订者
1	2012-5-5	最初版本	Harri

Approve 批准	Check 审核	Preparation 拟制	Date 日期

目录

Product Description	4
Description	4
Features	4
Applications	4
Electrical performance	5
Digital IO Pads.....	5
Receiver Sensitivity.....	5
Current Consumption	6
Pin	6
BOOT Mode	7
Reference Schematic	7
Reflow Profile	8
Mechanical Dimensions.....	9
In Kind.....	9
Physical Dimensions	10

Product Description

Description

ESP-12 is a low power consumption of the UART-WiFi module, with very competitive prices in the industry and ultra low power consumption technology, designed specifically for mobile devices and IOT applications, user's physical device can be connected to a Wi-Fi wireless network, Internet or intranet communication and networking capabilities. ESP-07 the use of small ceramic antenna package can support IPEX interface. users have a variety of installation options.

Features

- ▪ 802.11 b/g/n protocol
- ▪ Wi-Fi Direct (P2P), soft-AP
- ▪ Integrated TCP/IP protocol stack
- ▪ +19.5dBm output power in 802.11b mode
- ▪ Power down leakage current of < 10uA
- ▪ Integrated low power 32-bit MCU
- ▪ SDIO 2.0, SPI, UART
- ▪ STBC, 1x1 MIMO, 2x1 MIMO
- ▪ A-MPDU & A-MSDU aggregation & 0.4μs guard interval
- ▪ Wake up and transmit packets in < 2ms
- ▪ Standby power consumption of < 1.0mW (DTIM3)

Applications

- Smart power plugs
- Home automation
- Mesh network
- Industrial wireless control
- Baby monitors
- IP Cameras
- Sensor networks
- Wi-Fi location-aware devices
- Security ID tags
- Wi-Fi position system beacons

Electrical performance

Digital IO Pads

Parameter	Symbol	Min	Max	Unit
InputLow voltage	Vil	-0.3	0.25xVio	V
InputHighVoltage	Vih	0.75xVio	3.3	V
InputLeakageCurrent	Iil		50	nA
OutputLowVoltage	Vol		0.1 xVio	V
OutputHighVoltage	Voh	0.8xVio		V
InputPinCapacitance	Cpad		5	pF
VDDIO	Vio	1.8	3.3	V
MaximumDriveCapability	I _{max}		12	mA
Temperature	Tamb	-40	125	°C


Receiver Sensitivity

Description	MIN	Typical	MAX	Unit
Input frequency	2412		2484	MHz
Input impedance		50		Ω
Input reflection			-10	dB
Output power of PA for 72.2Mbps	14	15	16	dBm
Output power of PA for 11b mode	17.5	18.5	19.5	dBm
Sensitivity				
CCK 1Mbps		-98		dBm
CCK 11Mbps		-91		dBm
6Mbps(1/2BPSK)		-93		dBm
54Mbps(3/4 64-QAM)		-75		dBm
HT20 · MCS7 (65Mbps · 72.2Mbps)		-71		dBm
Adjacent Channel Rejection				
OFDM · 6Mbps		37		dB
OFDM · 54Mbps		21		dB
HT20 · MCS0		37		dB
HT20 · MCS7		20		dB

Current Consumption

Mode	MIN	Typical	MAX	Unit
Send 802.11b · CCK 1Mbps · Pout=+19.5dBm		215		mA
Send 802.11b · CCK 11Mbps · Pout=+18.5dBm		197		mA
Send 802.11g · OFDM54 Mbps · Pout=+16dBm		145		mA
Send 802.11n · MCS7 · Pout=+14dBm		135		mA
Receive 802.11b · Length 1024 Byte · -80dBm		100		mA
Receive 802.11g · Length 1024 Byte · -70dBm		100		mA
Receive 802.11n · Length 1024 Byte · -65dBm		102		mA
Standby		70		mA
Power Down		0.5		μA

Pin

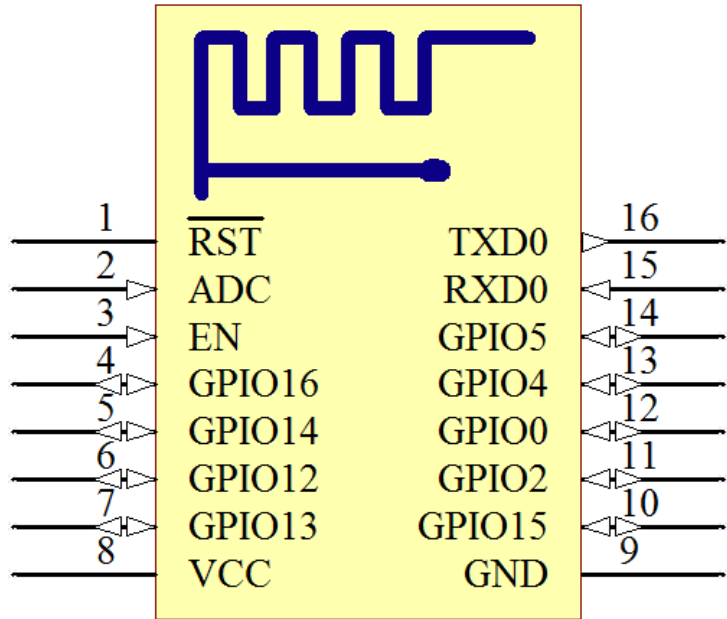


PIN	Function	Description
1	RST	1) Reset Pin. Active low ; 2) NC Or External MCU control ;
2	ADC	1) 10-bit ADC Analog Input 0-1V ;
3	EN	1) Module Enable. Active low °
4	GPIO16	1) GPIO
5	GPIO14	1) GPIO
6	GPIO12	1) GPIO
7	GPIO13	1) GPIO 2) UART2 RXD
8	VCC	1) Power supply . 3.3V IN ;
9	GND	1) Power Ground
10	GPIO15	1) GPIO 2) UART2 TXD
11	GPIO02	1) WIFI State Show. Connection inside the module LED
12	GPIO0	1) GPIO
13	GPIO04	1) GPIO
14	GPIO05	1) GPIO
15	RXD0	1) UART0 RXD
16	TXD0	1) UART0 TXD

BOOT Mode

GPIO15	GPIO0	GPIO2	
1	X	X	SDIO/SPI WIFI
0	0	1	UART Download
0	1	1	Flash BOOT

Reference Schematic

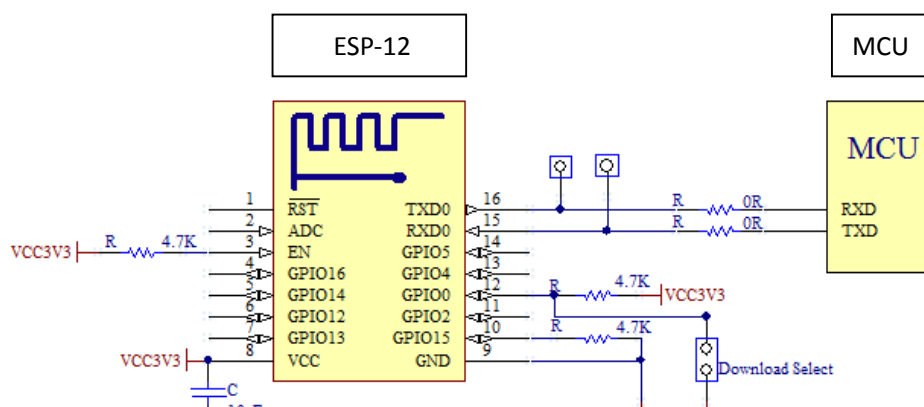

Reflow Profile

Refer to IPC/JEDEC standard; Peak Temperature : <250°C; Number of Times: 2 times;

