


**Device markers**  
**CC 85/54 K MC NE GE**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-2083  
www.weidmueller.com

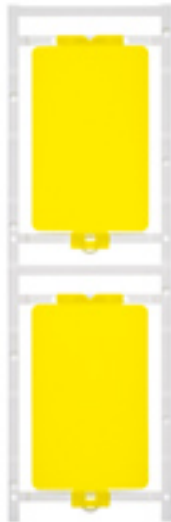

**ClipCard** device markers in MultiCard format can be used to label electrical installations and switching facilities. They offer an attractive alternative to engraved labelling. Labelling with **PrintJet PRO**, the **MCP Plus** plotter, **MCP Basic** and **MC-Mobilo** platforms is possible thanks to our established MultiCard format.

- Highly resistant print – use the PrintJet as a substitute for engraving
- Universal fixing
- Holder (for screw fixing or with cable ties)
- Tag rail (self-adhesive or screw fixing)
- Or self-adhesive tags

**General ordering data**

|            |                                                                     |
|------------|---------------------------------------------------------------------|
| Order No.  | <a href="#">1138440000</a>                                          |
| Type       | CC 85/54 K MC NE GE                                                 |
| Version    | Device markers, MultiCard, 85 x 54 mm, Polyamide 66, Colour: Yellow |
| GTIN (EAN) | 4032248919857                                                       |
| Qty.       | 10 pc(s).                                                           |

## Device markers

### CC 85/54 K MC NE GE

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-2083  
 www.weidmueller.com

## Technical data

### Dimensions

|        |        |            |        |
|--------|--------|------------|--------|
| Length | 85 mm  | Width      | 54 mm  |
| Height | 0.8 mm | Net weight | 13.3 g |

### Markings

|                                                |                            |                                              |        |
|------------------------------------------------|----------------------------|----------------------------------------------|--------|
| Adhesive                                       | Double-sided adhesive tape | Cadmium                                      | No     |
| Can be labelled with thermal transfer printers | No                         | Can be printed with plotter                  | Yes    |
| Can be written with dot-matrix printer         | No                         | Can be written with laser printer            | No     |
| Colour                                         | Yellow                     | Conductor O.D.                               | -      |
| Flammability class UL 94                       | V-2                        | Halogen                                      | No     |
| Material                                       | Polyamide 66               | Material colour according to resistance code | 4      |
| Operating temperature range, max.              | 60 °C                      | Operating temperature range, min.            | -40 °C |
| Pin can be written (STI)                       | Yes                        | PrintJet                                     | Yes    |
| Silicone                                       | No                         | Speed marking laser                          | No     |
| Version                                        | Self-adhesive              |                                              |        |

### Classifications

|            |             |            |             |
|------------|-------------|------------|-------------|
| ETIM 2.0   | EC001288    | ETIM 3.0   | EC001288    |
| UNSPSC     | 30-21-18-01 | eClass 4.1 | 24-19-02-18 |
| eClass 5.1 | 27-14-91-29 | eClass 6.0 | 27-14-91-29 |
| eClass 7.0 | 27-14-91-29 |            |             |

### Approvals

Approvals