

SWITCH CIRCUIT				MATERIAL AND FINISH AS BELOW					
WHEN CARD IS EJECTED		WHEN CARD IS INSERTED		A	Housing	LCP UL94V-0 Beige		E	
				B	Contact	Phosphor Bronze C5210, Contact Area: Gold Flash		F	
				C	Latch	Stainless Steel SUS301		G	
				D				H	

NOTES:

DATE CODE 2202 (YWWDD)

Y: 2 YEAR(2012)

WW:20 WEEK(01~52)

D: 2 DAY(01~07)

SPECIFICATION:

1. ELECTRICAL

1.1 Current Rating: 0.5A per pin

1.2 Voltage Rating: 25V AC/DC

1.3 Contact Resistance: 60mΩ

1.4 Insulation Resistance: 500MΩ

1.5 Dielectric Withstanding Voltage: 125VAC

2. MECHANICAL

2.1 Durability: 25 Cycle

2.2 Latch Retention Force: 8 N/Pos. Min

3. ENVIRONMENTAL

3.1 Operating temperature range: -40℃~-+85℃


3.2 Storage temperature range: -40℃~-+85℃

4. SOLDER ABILITY

4.1 Recommended IR Reflow Temperature: 255℃ 10Sec


P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12
PIN ASSIGNMENT											
121A-92A00 SO DIMM DDR2 Socket 1.8V 200Pin Type H:9.2, Contact Area: Gold Flash											
PRODUCT NO.						DESCRIPTION					
UNLESS OTHERWISE SPECIFIED TOLERANCE						www.attend.com.tw					
ANGLES						ANG. ±5°					
LINEAR						O. ±0.3					
SCALE						AS SHOWNUNIT: mm					
DRAWN						Willis2012/12/05					
CHECKED						Angel2012/12/05					
APPROVED						Ken2012/12/05					
REV.						SIZEA41.0					
FILE NAME						121A-92A00_B_1					


ATTEND

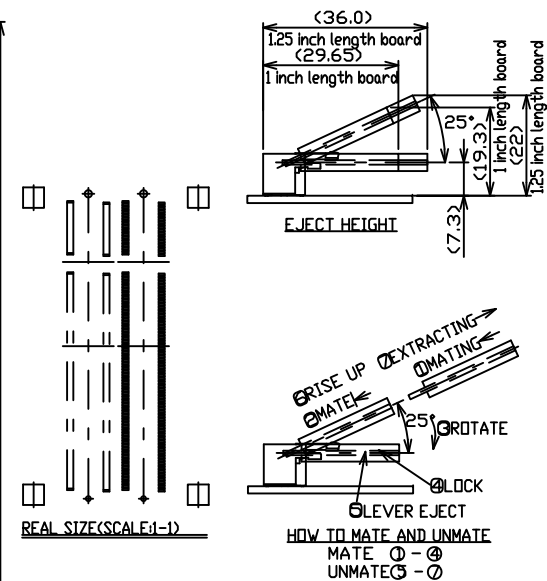

							UNLESS OTHERWISE SPECIFIED TOLERANCE												
							ANGLES	ANG.	±5°										
							LINEAR	0.	±0.3										
								0.0	±0.25										
								0.00	±0.20										
							SCALE	AS SHOWED	UNIT: mm	www.attend.com.tw									
A		Revise:					DRAWN	Willis	2012/12/05	DRAWN NAME:									
		Revise:					CHECKED	Angel	2012/12/05	SO DIMM DDR2 Socket 1.8V 200Pin 9.2H Type									
		Revise:					APPROVED	Ken	2012/12/05	PRODUCT NO.	121A-92A00								
REV.	DESCRIPTION			DATE	REV.	DESCRIPTION			DATE		SIZE A4	REV. 1.0	FILE NAME	121A-92A00_B_1					
	1		2		3		4		5		6		7		8		9		10

REV.	DESCRIPTION	DATE		SIZE A4	REV. 1.0	FILE NAME	121A-92A00_B_1
------	-------------	------	---	------------	-------------	-----------	----------------

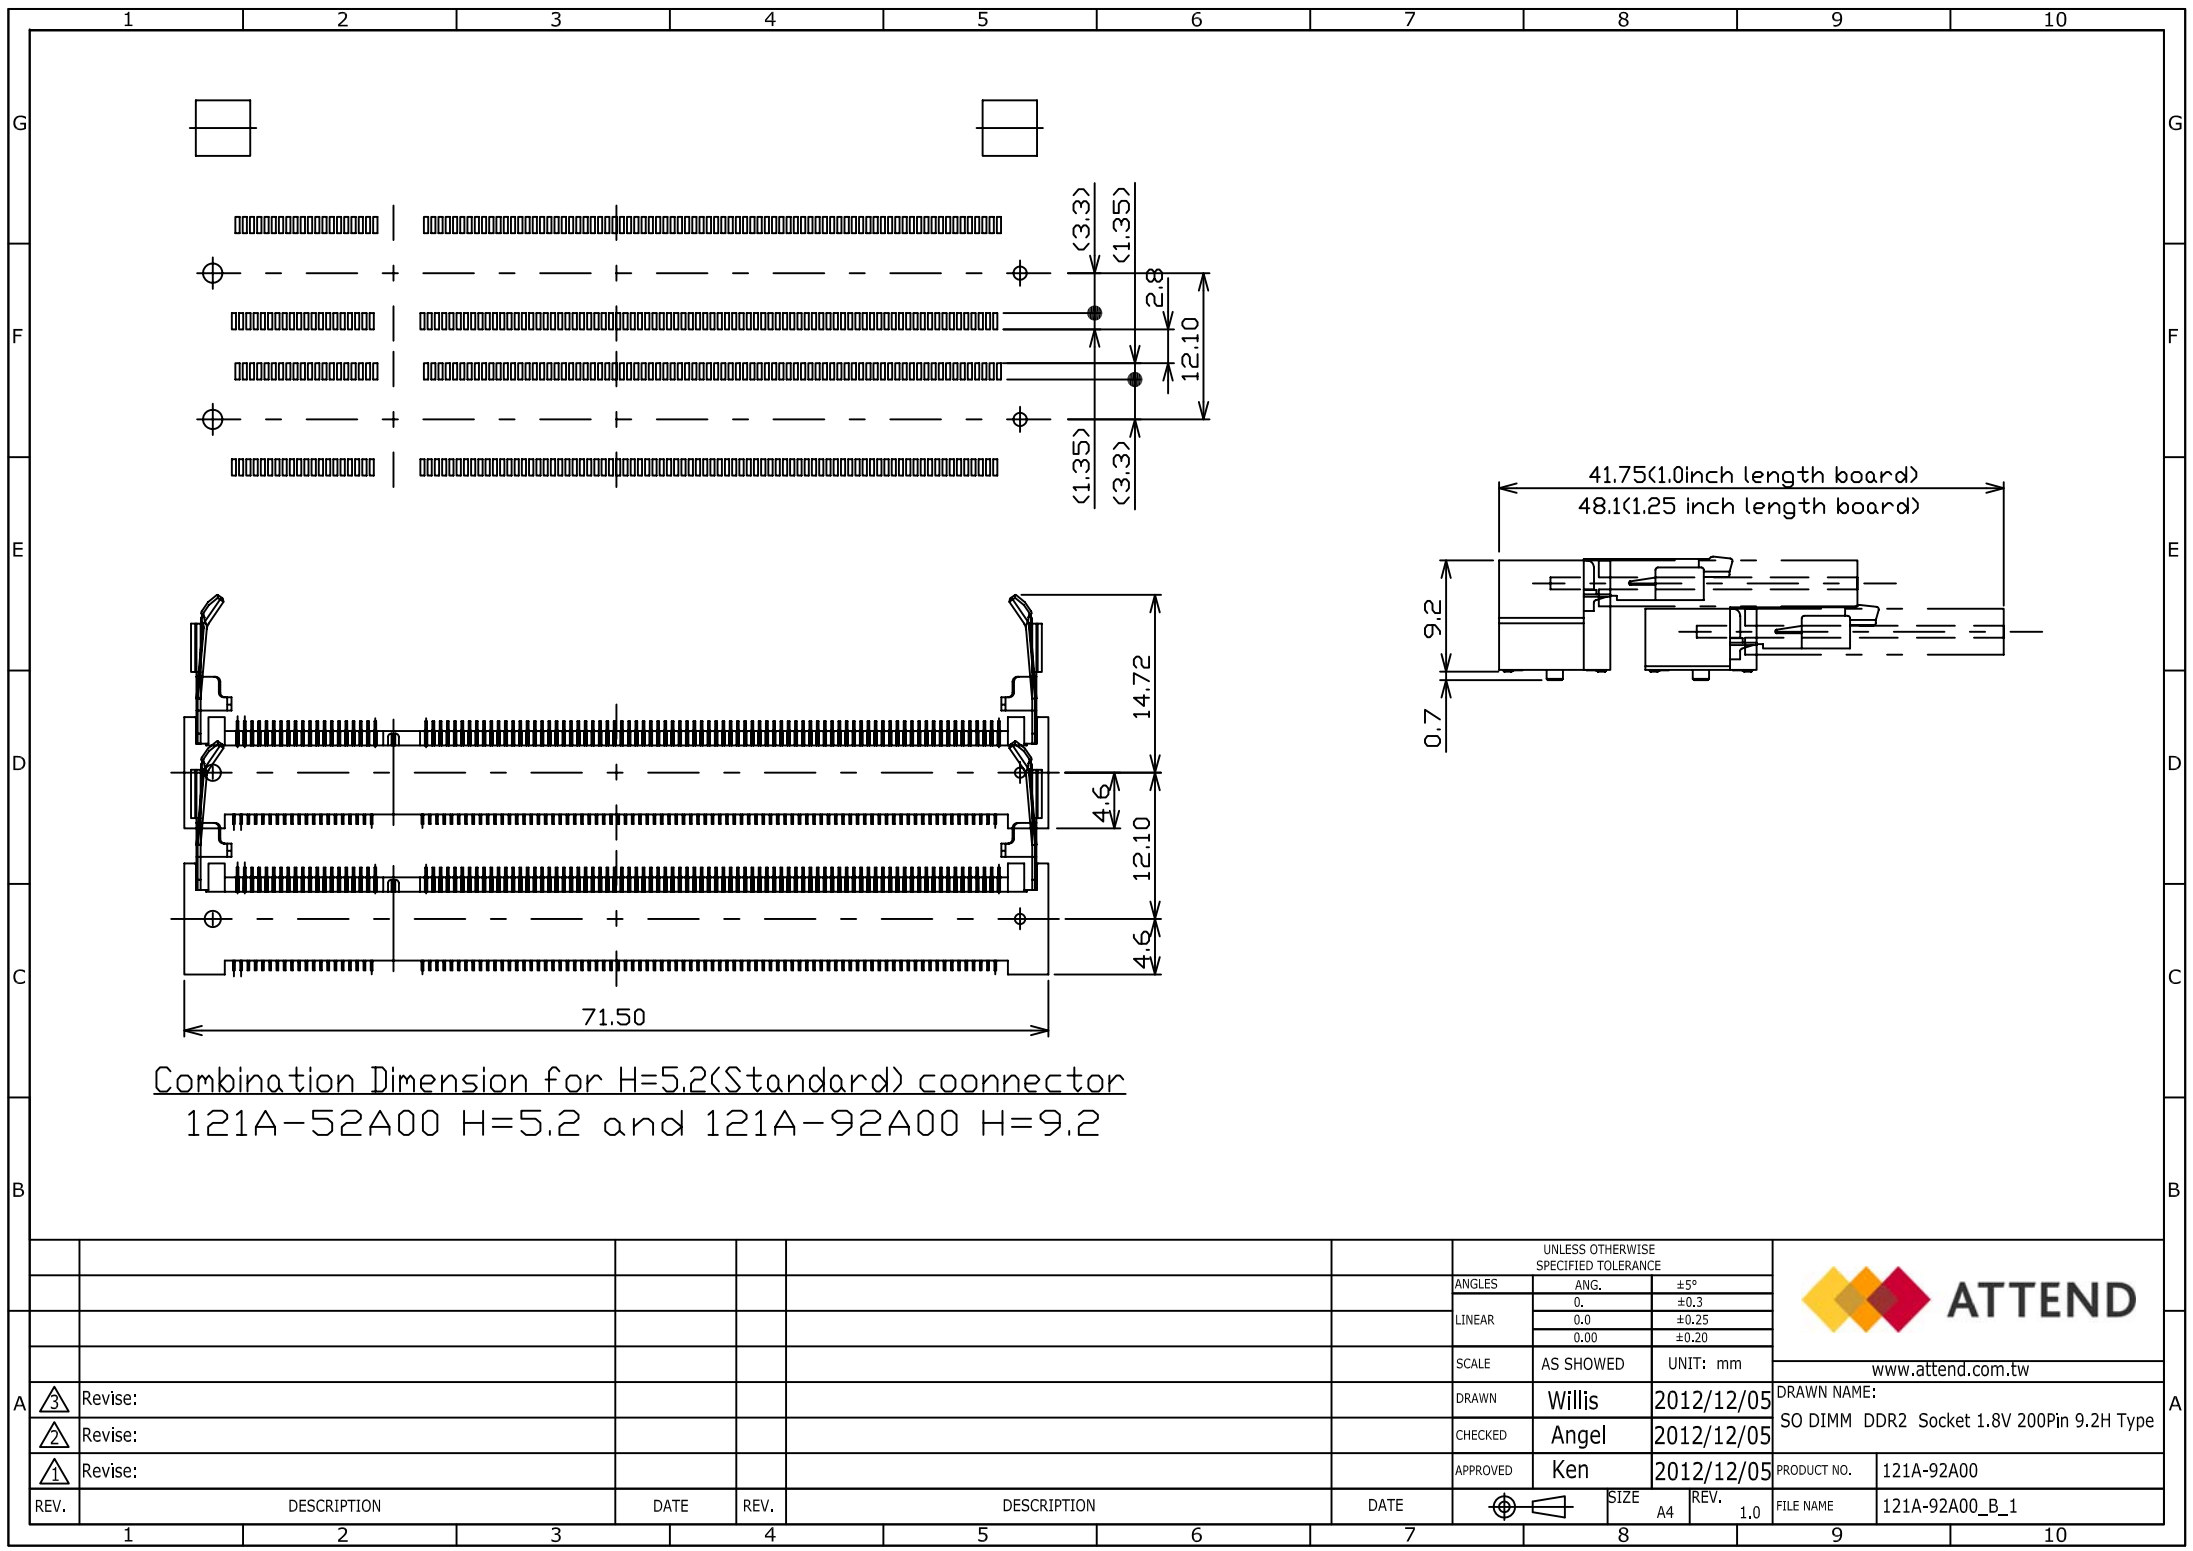

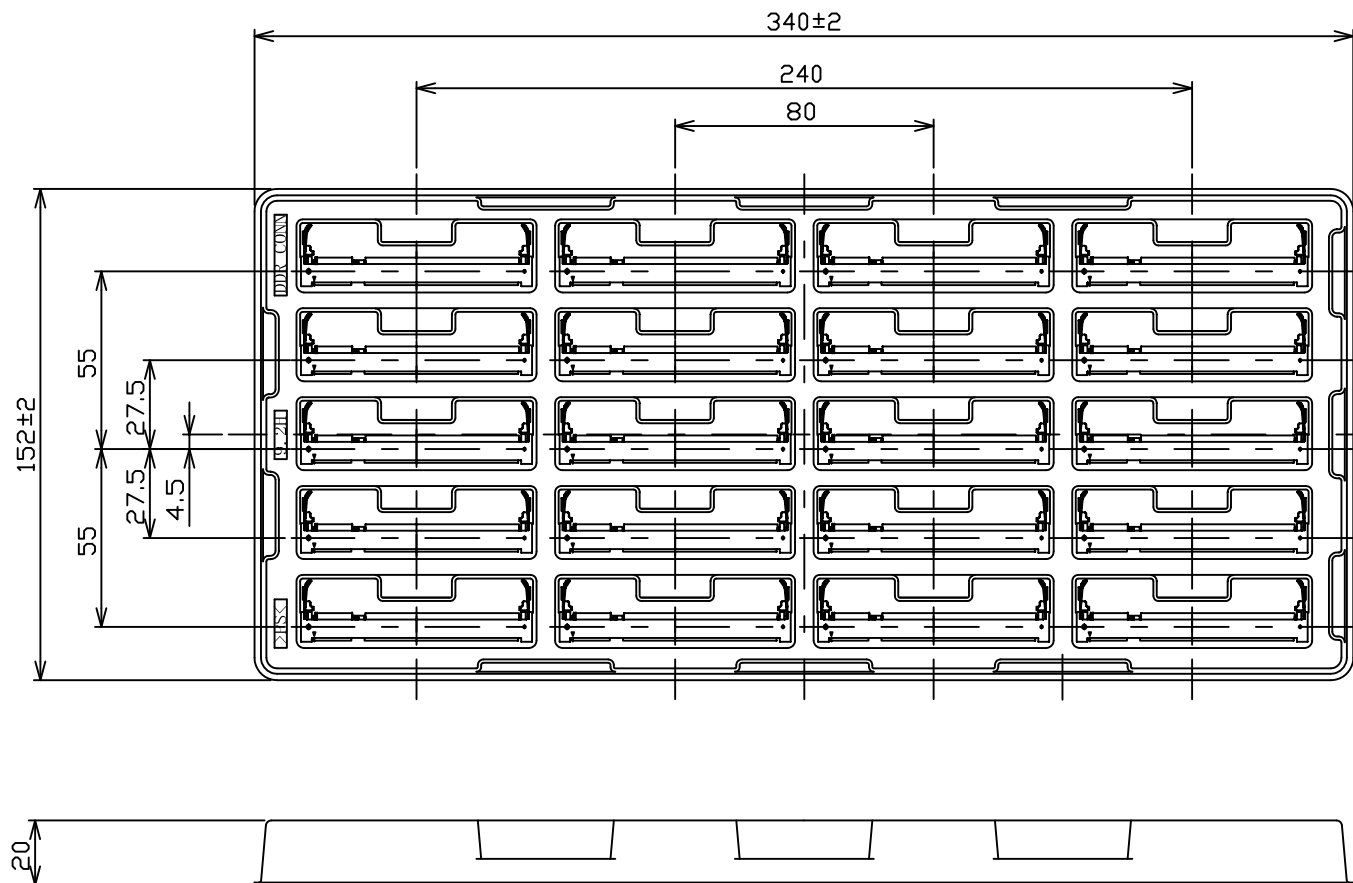

PACKAGING SPECIFICATION:


1. PACKING

1.1 Quantity:

20Piece/Tray

160Piece/Inner Carton

480Piece/Outer Carton



SOFT TRAY PACKAGING

UNLESS OTHERWISE SPECIFIED TOLERANCE		
ANGLES	ANG.	±5°
LINEAR	0.	±0.3
	0.0	±0.25
	0.00	±0.20
SCALE	AS SHOWN	UNIT: mm
DRAWN	Willis	2012/12/05
CHECKED	Angel	2012/12/05
APPROVED	Ken	2012/12/05



www.attend.com.tw

DRAWN NAME:
SO DIMM DDR2 Socket 1.8V 200Pin 9.2H Type

PRODUCT NO. 121A-92A00

FILE NAME 121A-92A00_D_1

△

Revise:

△

Revise:

△

Revise:

REV.

DESCRIPTION

DATE

REV.

DESCRIPTION

DATE

⊕

⊖

SIZE

A4

REV.

1.0

FILE NAME

121A-92A00_D_1