



MS L

Matière	laiton nickelé
joint intérieur :	TPE
joint torique :	NBR
Températures d'utilisation :	-40 à +100°C
Résistance à la traction :	selon EN 50262 version A pour filetage métrique




IP68 (10 bar) / IP69K

Référence article		Ø		H	L	L1
	G	mm	mm	mm	mm	mm

Joint court en deux parties

Filetage de raccordement métrique

A1100.17.50	M16x1,5	6,0 - 10,5	24/18	22	50	40
A1100.20.50	M20x1,5	8,0 - 15,0	30/24	23	50	40
A1100.25.50	M25x1,5	12,5 - 20,5	36/30	28	50	40
A1100.32.50	M32x1,5	17,0 - 25,5	46/36	28	50	40
A1100.40.50	M40x1,5	24,0 - 33,0	55/46	31	50	40

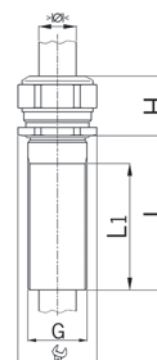

Joint court en deux parties

Filetage de raccordement Pg

A1100.11.50	Pg 11	5,5 - 12,0	27/21	21	50	40
A1100.13.50	Pg 13	8,0 - 15,0	30/24	23	50	40
A1100.16.50	Pg 16	8,0 - 15,0	30/24	23	50	40
A1100.21.50	Pg 21	12,5 - 20,5	38/30	28	50	40
A1100.29.50	Pg 29	19,0 - 27,5	46/38	28	50	40



NPT

Matière
joint intérieur : laiton nickelé
TPE

Températures d'utilisation : -40 à +100°C




IP 54 / 68*

Référence article		Ø		H	L
	G	mm	mm	mm	mm

Joint court en une partie

A1000.1/8NPT.040	NPT 1/8"	3,0 - 4,0	13	15	8
A1000.1/8NPT.060	NPT 1/8"	4,0 - 6,0	13	15	8
A1000.1/4NPT.050	NPT 1/4"	3,5 - 5,0	15	17	12
A1000.1/4NPT.065	NPT 1/4"	5,0 - 6,5	15	17	12
A1000.1/4NPT.080	NPT 1/4"	6,5 - 8,0	15	17	12
A1000.3/8NPT.045	NPT 3/8"	3,5 - 4,5	18	20	12
A1000.3/8NPT.060	NPT 3/8"	4,5 - 6,0	18	20	12
A1000.3/8NPT.080	NPT 3/8"	6,0 - 8,0	18	20	12
A1000.3/8NPT.105	NPT 3/8"	8,0 - 10,5	18	22	12
A1000.1/2NPT.080	NPT 1/2"	6,0 - 8,0	24	21	15
A1000.1/2NPT.110	NPT 1/2"	8,0 - 11,0	24	21	15
A1000.1/2NPT.150	NPT 1/2"	11,0 - 15,0	24	23	15
A1000.3/4NPT.125	NPT 3/4"	9,5 - 12,5	30	28	15
A1000.3/4NPT.160	NPT 3/4"	12,5 - 16,0	30	28	15
A1000.3/4NPT.205	NPT 3/4"	16,0 - 20,5	30	28	15
A1000.1NPT.170	NPT 1"	14,0 - 17,0	36	28	20
A1000.1NPT.210	NPT 1"	17,0 - 21,0	36	28	20
A1000.1NPT.255	NPT 1"	21,0 - 25,5	36	28	20
A1000.11/4NPT.240	NPT 1 1/4"	20,0 - 24,0	46	31	20
A1000.11/4NPT.285	NPT 1 1/4"	24,0 - 28,5	46	31	20
A1000.11/4NPT.330	NPT 1 1/4"	28,5 - 33,0	46	31	20
A1000.11/2NPT.330	NPT 1 1/2"	29,0 - 33,0	55	34	22
A1000.11/2NPT.370	NPT 1 1/2"	33,0 - 37,0	55	34	22
A1000.11/2NPT.410	NPT 1 1/2"	37,0 - 41,0	55	34	22
A1000.2NPT.400	NPT 2"	35,0 - 40,0	70	37	22
A1000.2NPT.460	NPT 2"	40,0 - 46,0	70	37	22
A1000.2NPT.520	NPT 2"	46,0 - 52,0	70	37	22

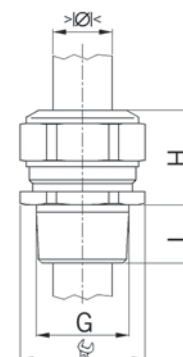

Joint court en deux parties

A1000.3/8NPT	NPT 3/8"	6,0 - 10,5	18	22	12
A1000.1/2NPT	NPT 1/2"	8,0 - 15,0	24	23	15
A1000.3/4NPT	NPT 3/4"	12,5 - 20,5	30	28	15
A1000.1NPT	NPT 1"	17,0 - 25,5	36	28	20
A1000.11/4NPT	NPT 1 1/4"	24,0 - 33,0	46	31	20
A1000.11/2NPT	NPT 1 1/2"	33,0 - 41,0	55	34	22
A1000.2NPT	NPT 2"	40,0 - 52,0	70	37	22

 * IP68 = Par ajout d'un joint torique au niveau du filetage de raccordement.



GAZ

Matière
joint intérieur : TPE
joint torique : NBR
Températures d'utilisation : -40 à +100°C



IP 68

Référence article		Ø		H	L
	G	mm	mm	mm	mm

Joint court en deux parties

A1000.3/8G	G 3/8"	5,5 - 12,0	21	21	6
A1000.1/2G	G 1/2"	8,0 - 15,0	24	23	8
A1000.3/4G	G 3/4"	12,5 - 20,5	30	28	10
A1000.1G	G 1"	17,0 - 25,5	36	28	11
A1000.11/2G	G 1 1/2"	25,0 - 35,0	55/50	32	12
A1000.2G	G 2"	37,0 - 49,0	65	37	12
A1000.21/2G.500	G 2 1/2"	45,0 - 50,0	80	38	18
A1000.21/2G.560	G 2 1/2"	50,0 - 56,0	80	38	18
A1000.3G.630	G 3"	56,0 - 63,0	80	38	18
A1000.3G.700	G 3"	63,0 - 70,0	95	40	18






MS IG

Matière
joint intérieur : laiton nickelé
TPE

Températures d'utilisation : -40 à +100°C

Résistance à la traction : selon EN 50262
version A pour le filetage métrique



IP 68*

Référence article	 G	Ø mm	 mm	H mm	L mm
----------------------	--	---------	---	---------	---------

Joint court en deux parties


Filetage de raccordement métrique intérieur

A1400.17	M16x1,5	6,0 - 10,5	18	28	6
A1400.20	M20x1,5	8,0 - 15,0	24	31	6
A1400.25	M25x1,5	12,5 - 20,5	30	40	10

Joint court en deux parties

Filetage de raccordement Pg intérieur

A1400.11	Pg 11	5,5 - 12,0	21	28	6
A1400.16	Pg 16	8,0 - 15,0	24	31	6
A1400.21	Pg 21	12,5 - 20,5	30	40	10

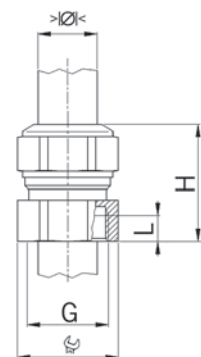

 * IP68 = Par ajout d'un joint torique au niveau du filetage de raccordement.