
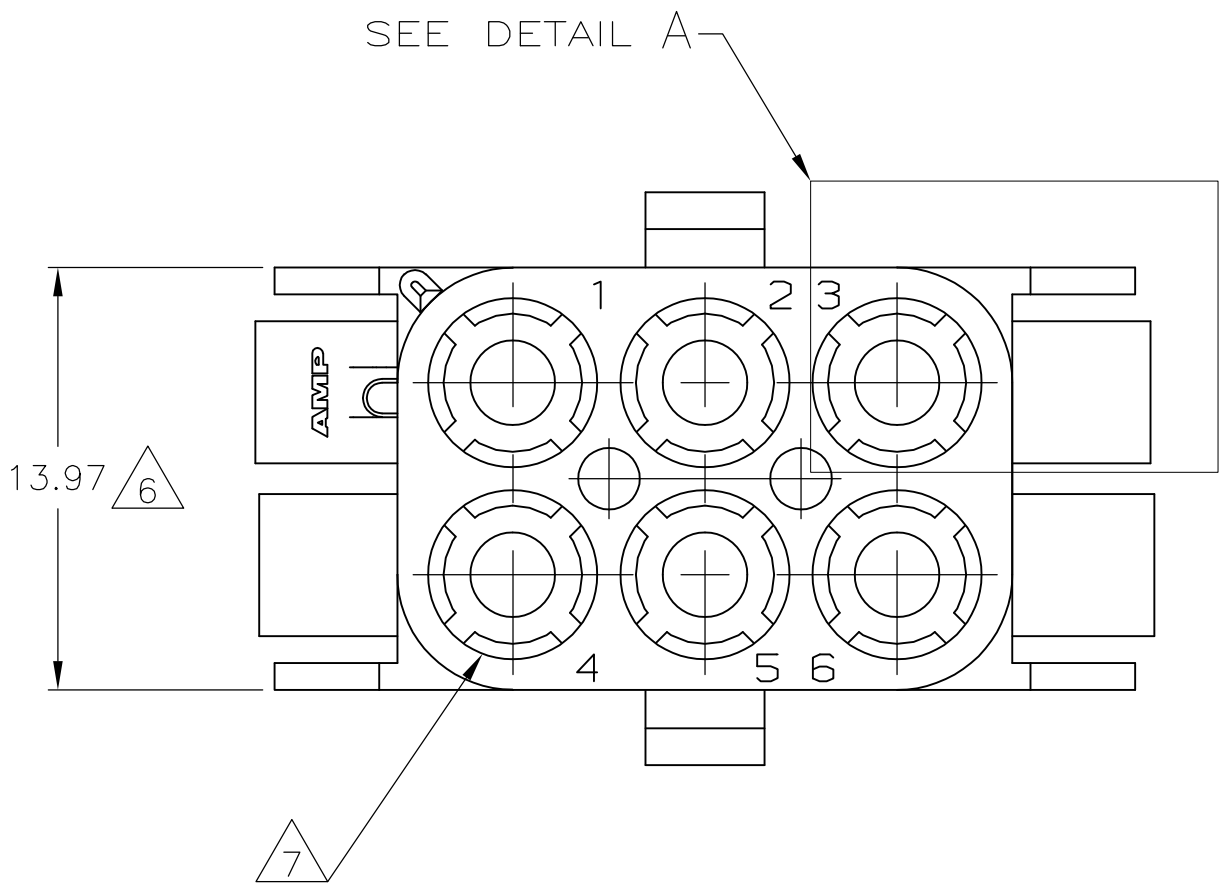
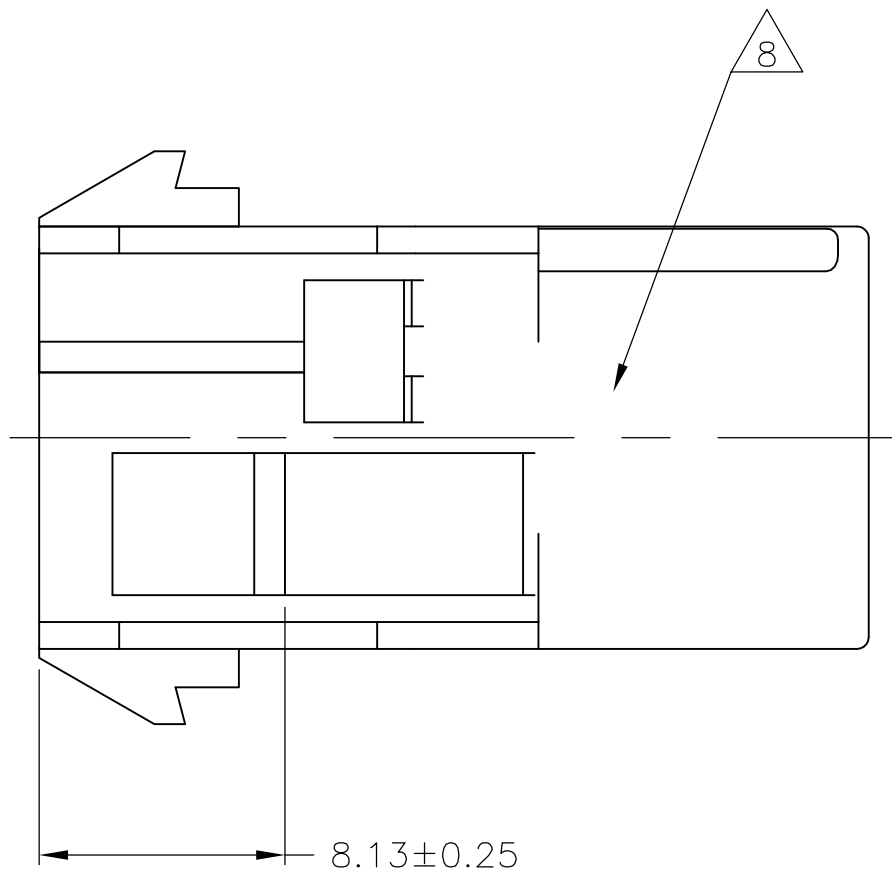



LOC	DIST	REVISIONS				
		REV	DATE	BY	CHK	APP
CM	00	AP3	REVISED PER ECR-11-020221	10OCT11	KH	TM

D


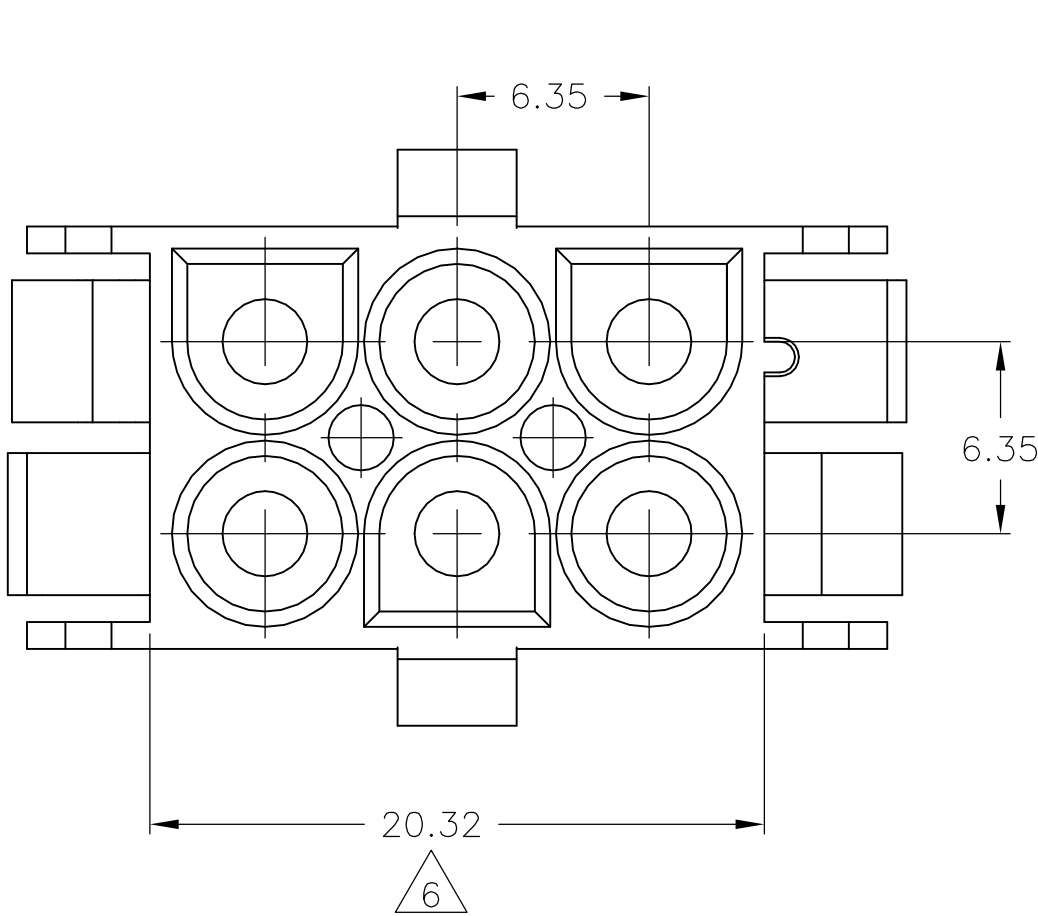


- 1 MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ PLUG.
- 2 RECOMMENDED PANEL THICKNESS 0.76 - 2.29.
- 3 PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
- 4 OPTIONAL FOR KEYING HOUSING IN PANEL.
- 5 CIRCUIT NUMBER 1 LOCATION.
- 6 DIMENSION INDICATED IS AS MOLDED. ADDITIONAL GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR.
- 7 FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. NO RIBS OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.
- 8 UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

C

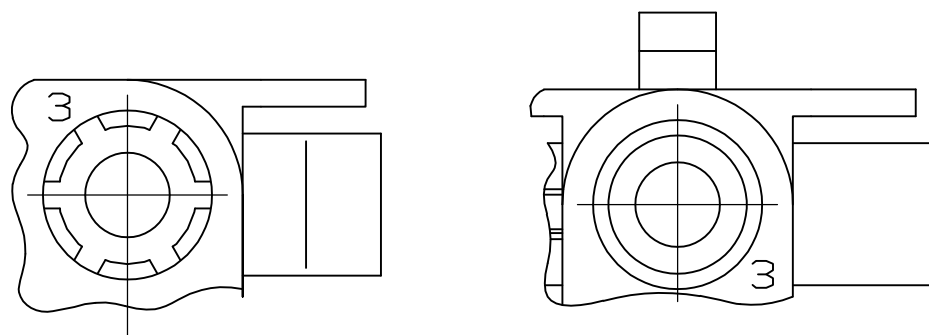


DETAIL A
OPTIONAL CONSTRUCTIONS

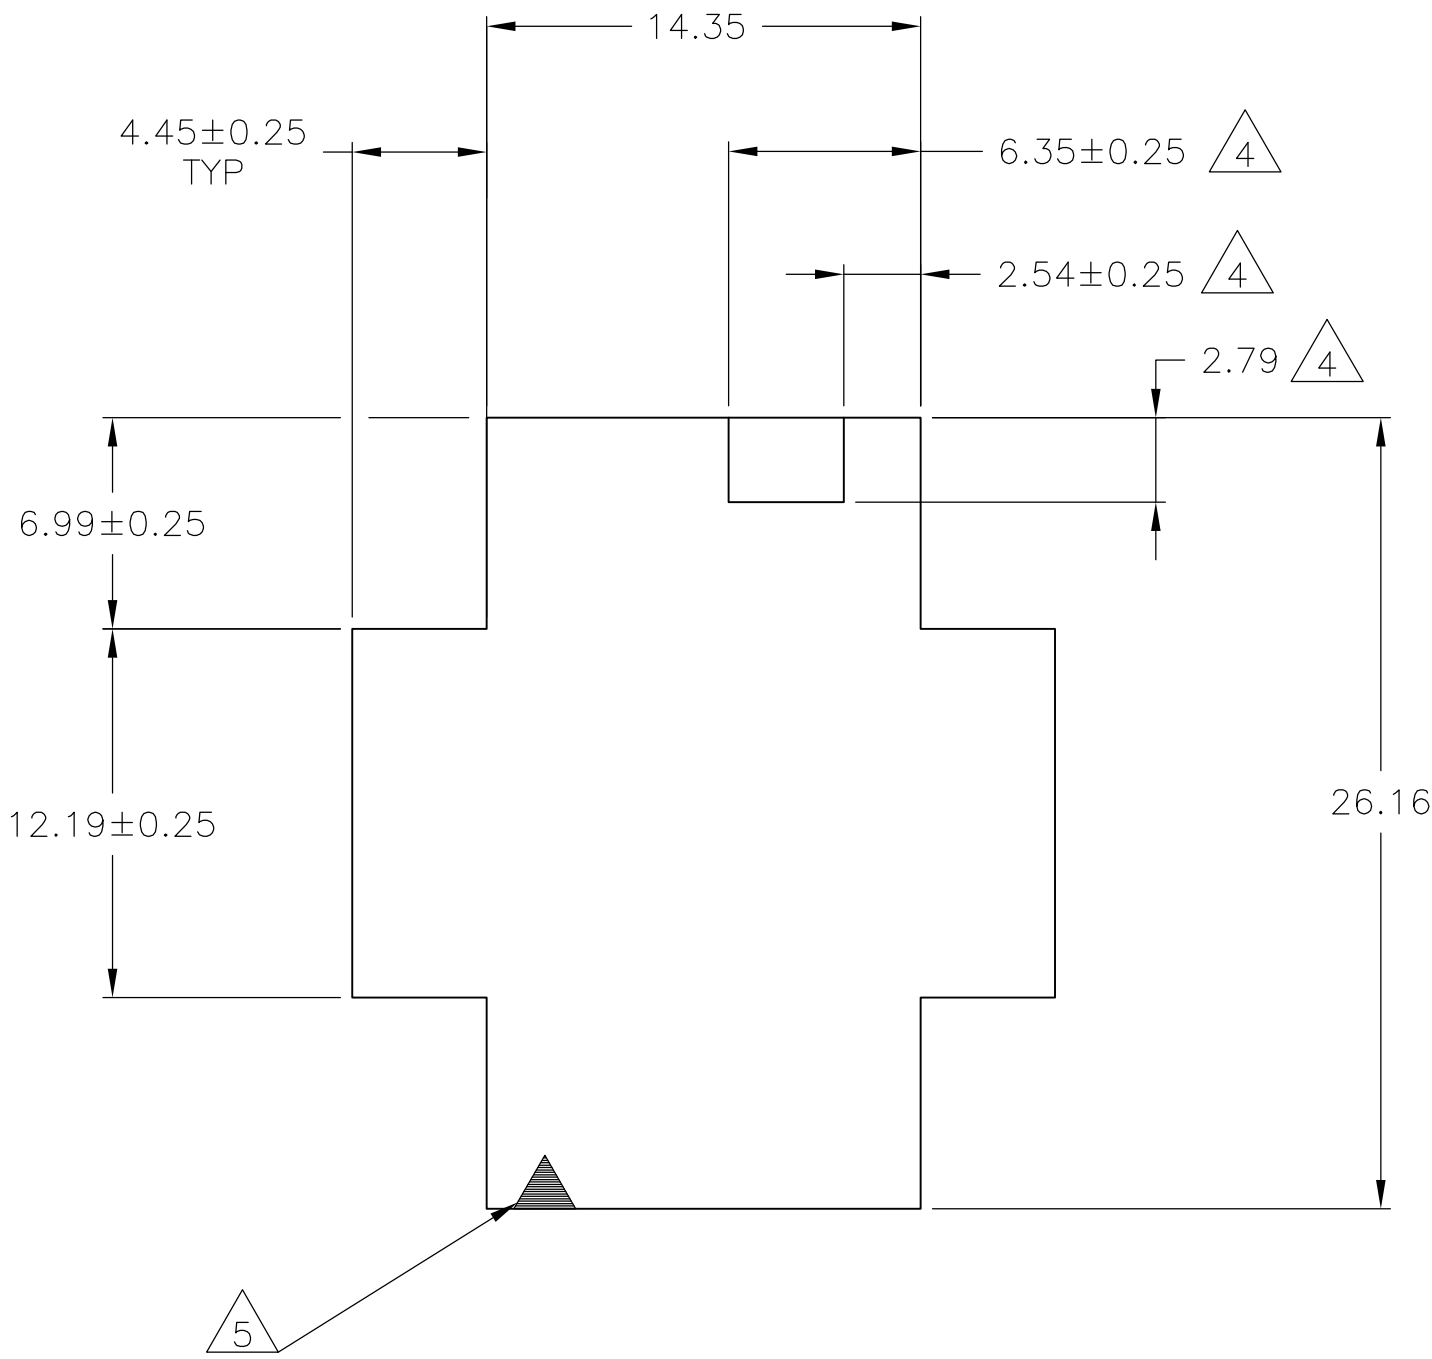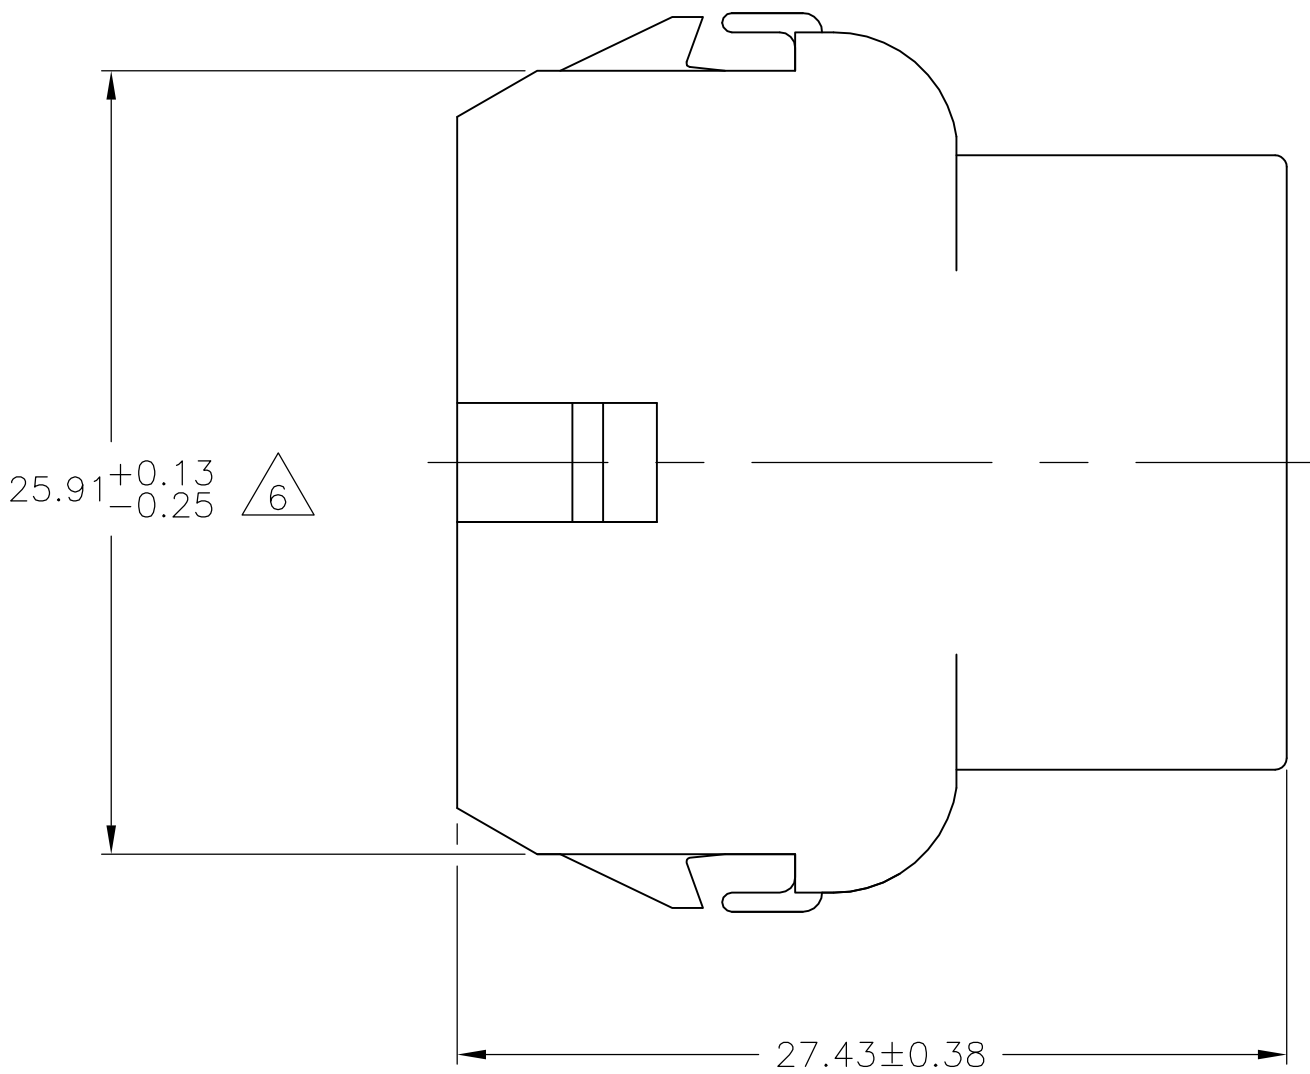


RECOMMENDED PANEL CUT OUT

B

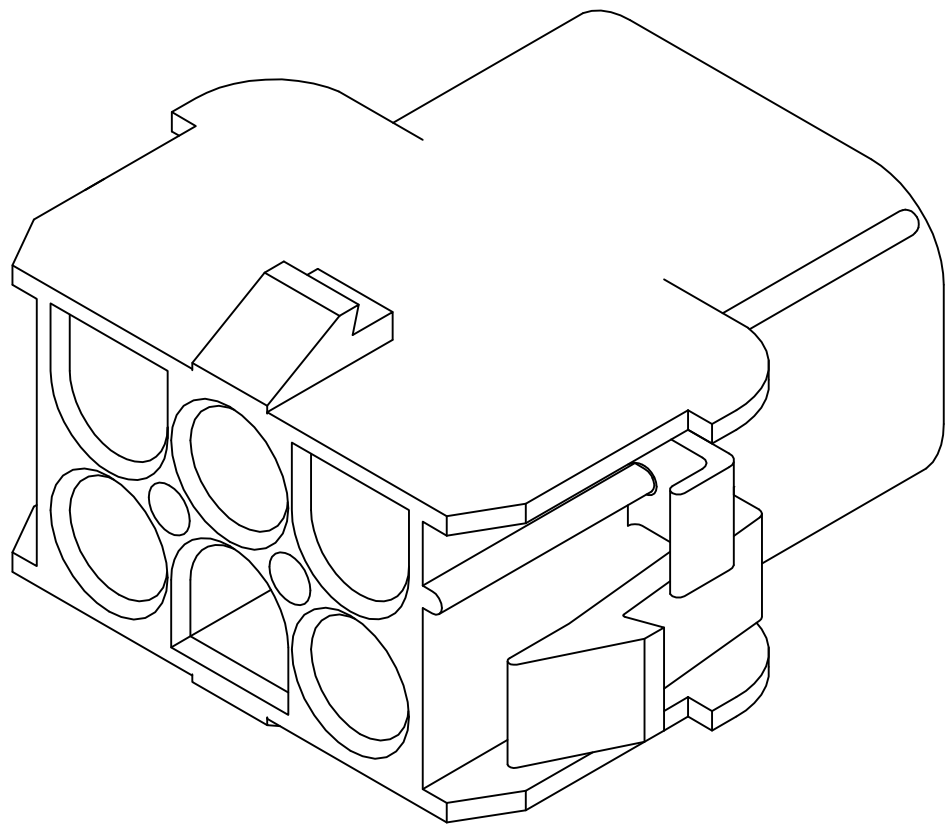

3-DIMENSIONAL MODEL
NTS

6.35	.250	27.43	1.080
4.45	.175	26.16	1.030
2.79	.110	25.91	1.020
2.54	.100	20.32	.800
2.29	.090	14.35	.565
0.76	.030	13.97	.550
0.38	.015	12.19	.480
0.25	.010	8.13	.320
0.13	.005	6.99	.275
MM	IN	MM	IN
CONVERSION TABLE			








9 OBSOLETE	BLACK	1-480705-9
	GREY	1-480705-8
	BLUE	1-480705-6
	GREEN	1-480705-5
	YELLOW	1-480705-4
9 OBSOLETE	ORANGE	1-480705-3
	RED	1-480705-2
	BROWN	1-480705-1
	NATURAL	1-480705-0
	COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 28JUL04	TE Connectivity	
DIMENSIONS: mm		CHK S. RIDGILL 28JUL04	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. RIDGILL 28JUL04	CAP, 6 CIRCUIT, UNIVERSAL MATE-N-LOK™	
0.127		PRODUCT SPEC	RESTRICTED TO	
0.127		APPLICATION SPEC	SIZE	
0.127		WEIGHT	CAGE CODE	
0.127		—	DRAWING NO	
0.127		—	A100779	
0.127		—	C=480705	
0.127		—	CUSTOMER DRAWING	
0.127		—	SCALE	
0.127		—	4:1	
0.127		—	SHEET	
0.127		—	1 OF 2	
0.127		—	REV	
0.127		—	AP3	

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	00		-	SEE SHEET 1	-	-	-

- 1
- STAMP NUMBERS 3.18 HIGH AT WIRE END OF HOUSING (12 POINT DAVID TYPE); CLARIFICATION MARKS UNDER THE 6 & 9.
- 2
- CHARACTERS TO BE STAMPED ON HOUSING IN A MANNER AS TO BE READ FROM WIRE END ONLY.
- 3
- VIOLET,BLACK,BROWN,AND BLUE COLORED BLOCKS TO BE STAMPED WITH WHITE CHARACTERS. ALL OTHER COLORED BLOCKS TO BE STAMPED WITH BLACK CHARACTERS.

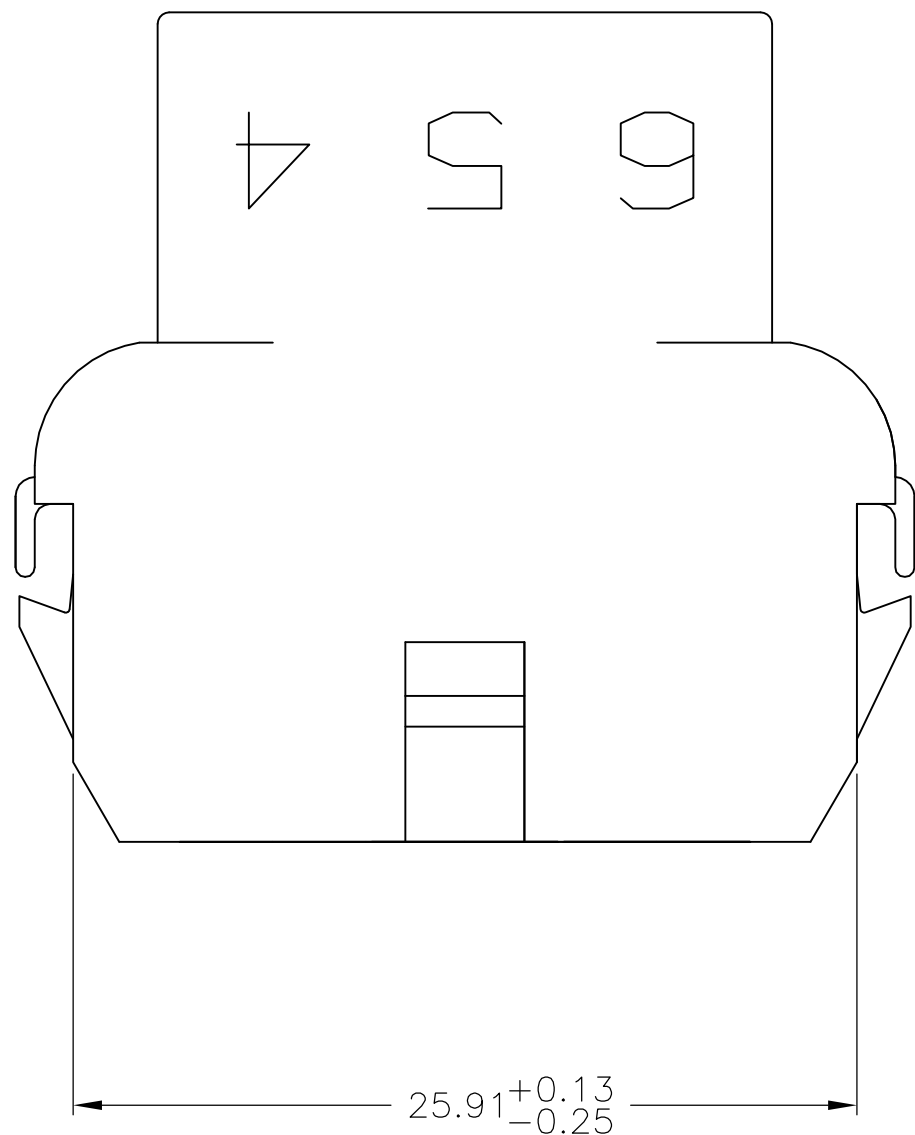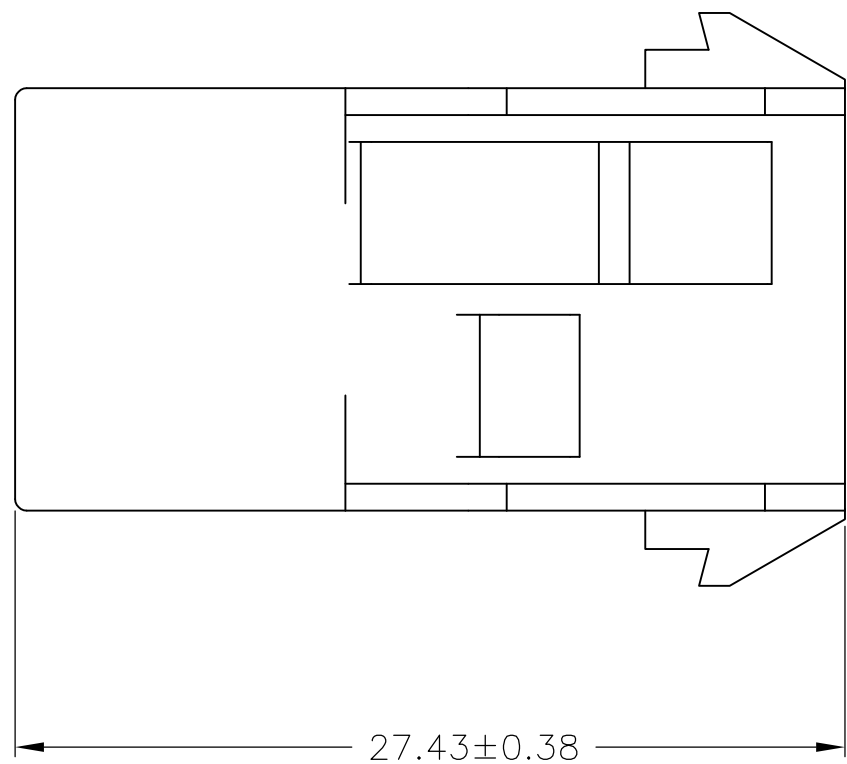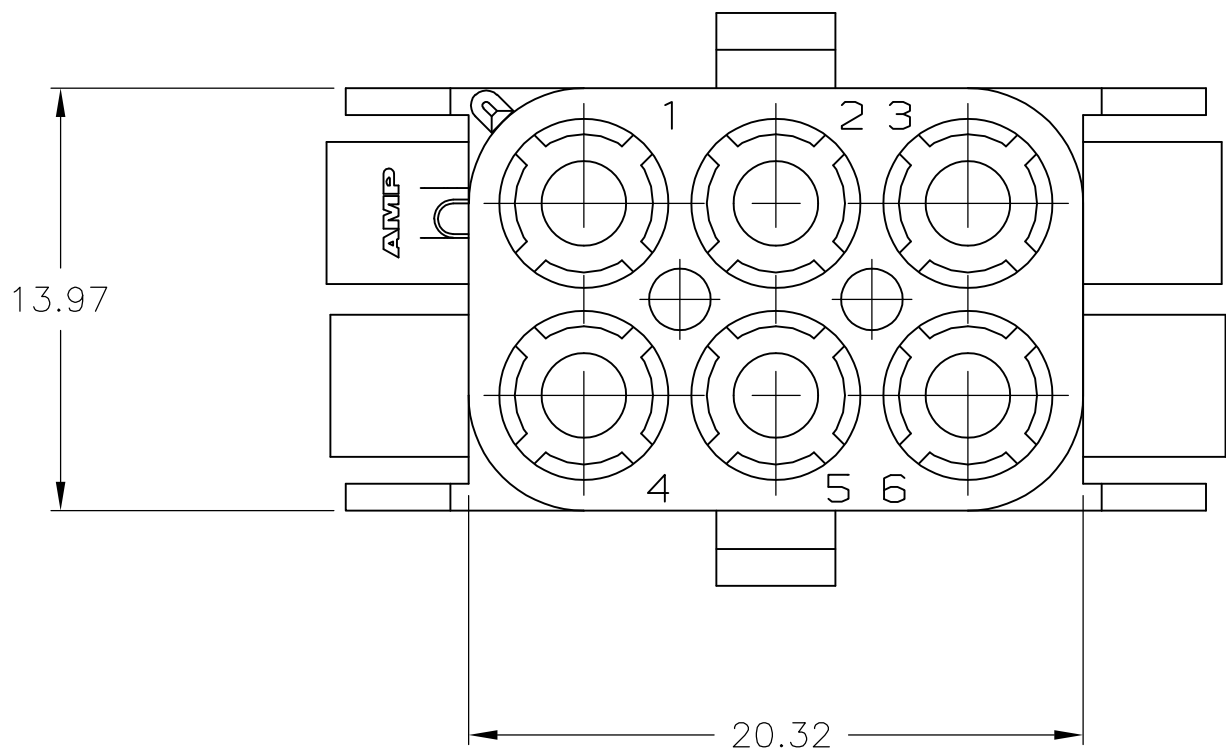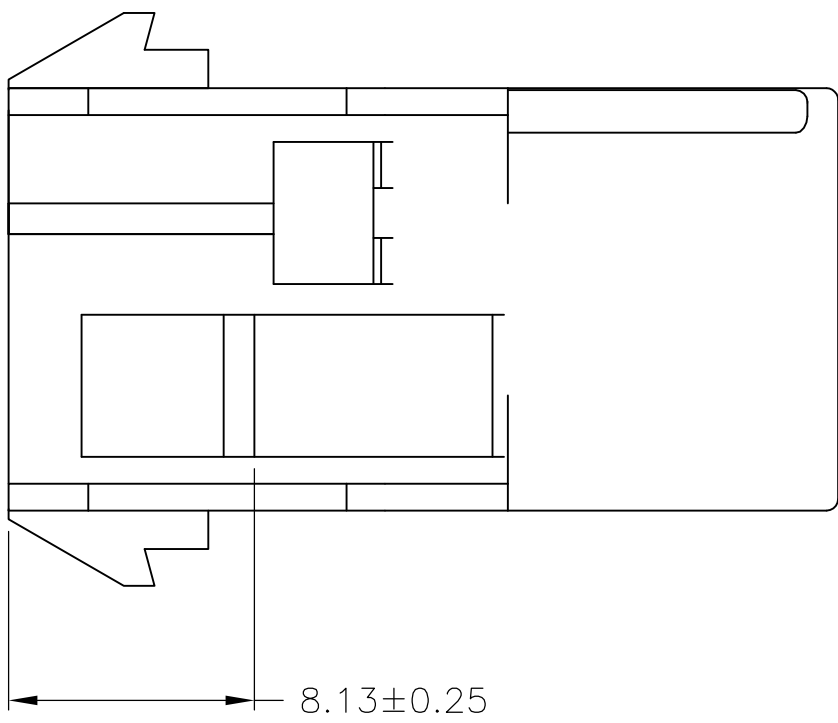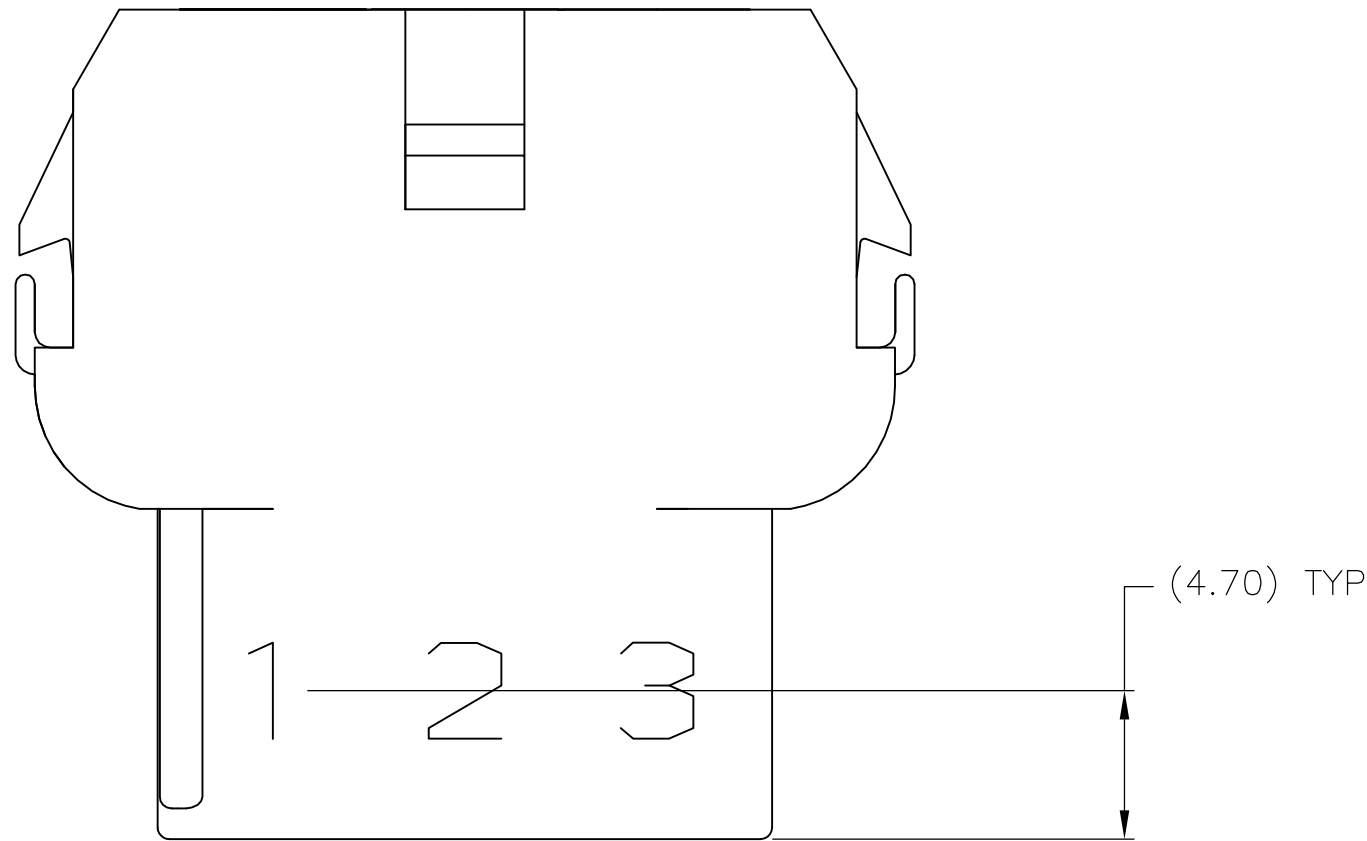

5.08	.200	-	-
4.70	.185	27.43	1.080
3.18	.125	25.91	1.020
0.38	.015	20.32	.800
0.25	.010	13.97	.550
0.13	.005	8.13	.320
MM	IN	MM	IN
CONVERSION TABLE			

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER	28JUL04	 TE Connectivity	
		CHK S. RIDGILL	28JUL04		
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME CAP, 6 CIRCUIT, UNIVERSAL MATE-N-LOK™	RESTRICTED TO
mm					
	0 PLC	±	—		
	1 PLC	±	—		
	2 PLC	± 0.127	—		
	3 PLC	±	—		
ANGLES		4 PLC	± 0°30'	SIZE	CAGE CODE
FINISH				DRAWING NO	
MATERIAL	—	WEIGHT	—	A1 00779	C=480705
CUSTOMER DRAWING				SCALE	4:1
				SHEET	2 OF 2
				REV	AP3