




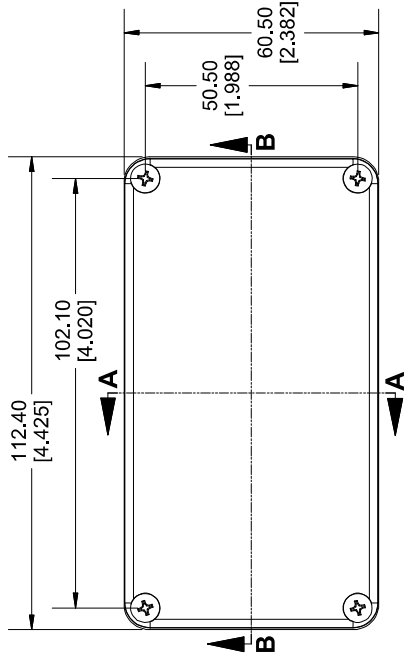


TOP VIEW

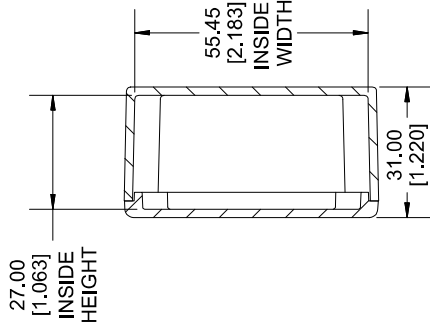


SECTION A-A
END VIEW

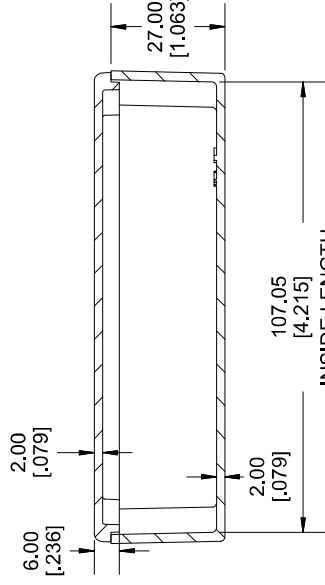

SECTION B-B
SIDE VIEW

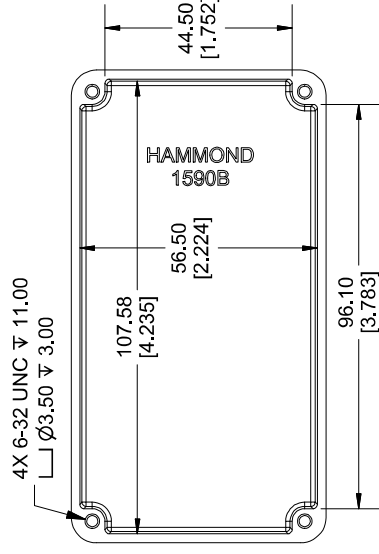

INSIDE BOX

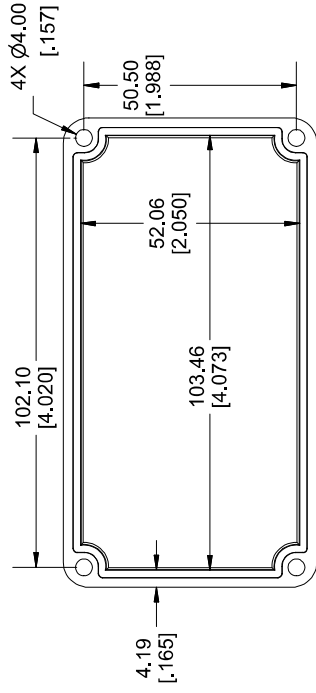

INSIDE LID



Enclosures can be Factory Modified (Milling, Drilling, Printing etc.)
Contact Factory mjm@hammondmfg.com for quotes
Solid models of this enclosure available in STEP or IGES.
(Part number and text placement/orientation on our products are subject to change.
we do not recommend using them as a focaling reference for modification purposes)

NOTE	
Purchased assembly includes box, lid and 4 cover screws.	
Box and lid are made from Diecast Aluminum Alloy.	
Silicone Gasket supplied with liquid resistant enclosure.	
Recommended Torque: 50-55 cN.m [71-78 ozf.in]	
Recommended Torque with Gasket : 25-30 cN.m [36-43 ozf.in]	
PART NUMBERS	
1590B Enclosure	
Natural Finish Enclosure	1590B
Black Textured Enclosure	1590BBK
1590B Liquid Resistant Enclosure (Silicone Gasket)	
Natural Finish Enclosure	1590WB
Black Textured Enclosure	1590WBBK
ACCESSORIES	
Liquid Resistant Cover Screws	
Stainless Steel Cover Screws (Pkg 100)	1590WMS100
[6-32 x 1/2" With O-Ring]	
Black Stainless Steel Cover Screws (Pkg 100)	1590WMS100BK
[6-32 x 1/2" With O-Ring]	
Standard Cover Screws	
Plated Cover Screws (Pkg 100)	1590MS100
[6-32 x 1/2"]	
Black Cover Screws (Pkg 100)	1590MS100BK
[6-32 x 1/2"]	



**HAMMOND
MANUFACTURING®**

1590B

www.hammondmfg.com

Dimensions:
mm
[inches]