




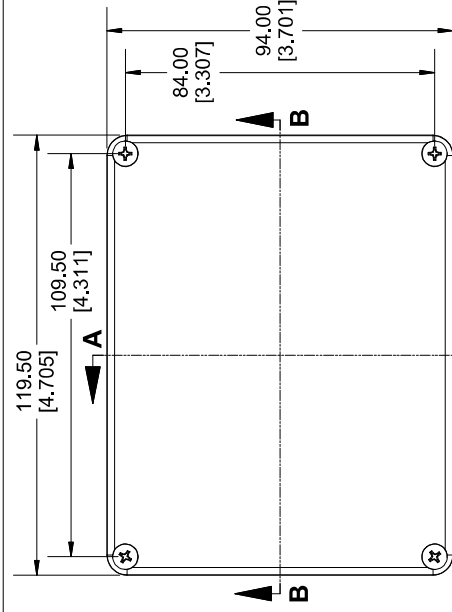


TOP VIEW

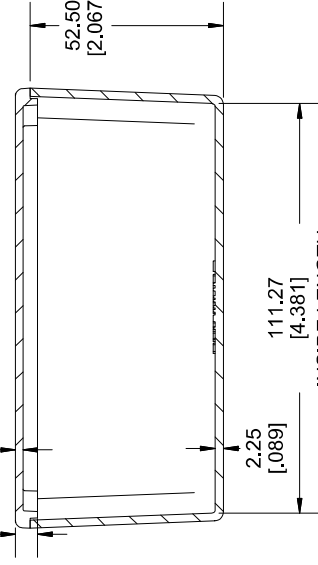


**SECTION B-B
SIDE VIEW**

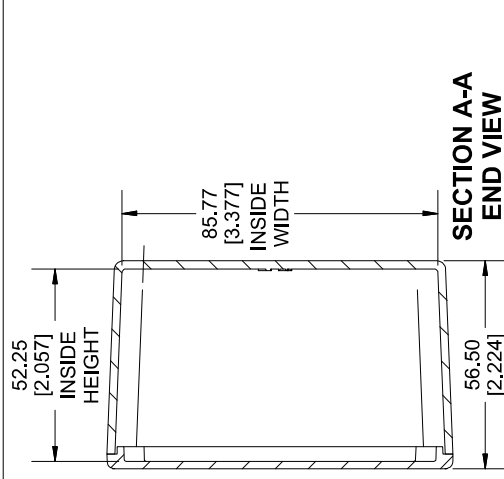

**SECTION A-A
END VIEW**

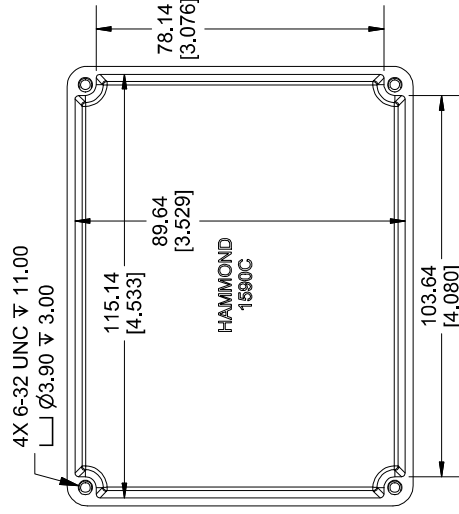

INSIDE BOX

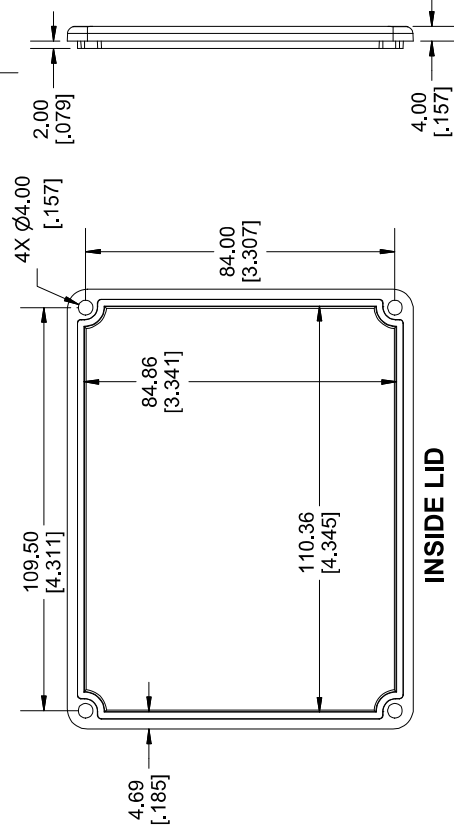

INSIDE LID



Enclosures can be Factory Modified (Milling, Drilling, Printing etc.)
Contact Factory njm@hammondmfg.com for quotes
Solid models of this enclosure available in STEP or IGES.
(Part number and text placement/orientation on our products are subject to change,
we do not recommend using them as a locating reference for modification purposes)

NOTE

Purchased assembly includes box, lid and 4 cover screws.
Box and lid are made from Diecast Aluminum Alloy.
Silicone Gasket supplied with liquid resistant enclosure.

Recommended Torque: 50-55 cN.m [71-78 ozf.in]

Recommended Torque with Gasket : 25-30 cN.m [36-43 ozf.in]

PART NUMBERS	
1590C Enclosure	1590C
Natural Finish Enclosure	1590CBK
Black Textured Enclosure	1590WC
1590C Liquid Resistant Enclosure (Silicone Gasket)	1590WCBK
Natural Finish Enclosure	1590WCBK
Black Textured Enclosure	1590WCBK
ACCESSORIES	
Liquid Resistant Cover Screws	
Stainless Steel Cover Screws (Pkg 100)	1590WMS100
[6-32 x 1/2" With O-Ring]	
Black Stainless Steel Cover Screws (Pkg 100)	1590WMS100BK
[6-32 x 1/2" With O-Ring]	
Standard Cover Screws	
Plated Cover Screws (Pkg 100)	1590MS100
[6-32 x 1/2"]	
Black Cover Screws (Pkg 100)	1590MS100BK
[6-32 x 1/2"]	



**HAMMOND
MANUFACTURING®**

1590C

www.hammondmfg.com

Dimensions:
mm
[inches]