


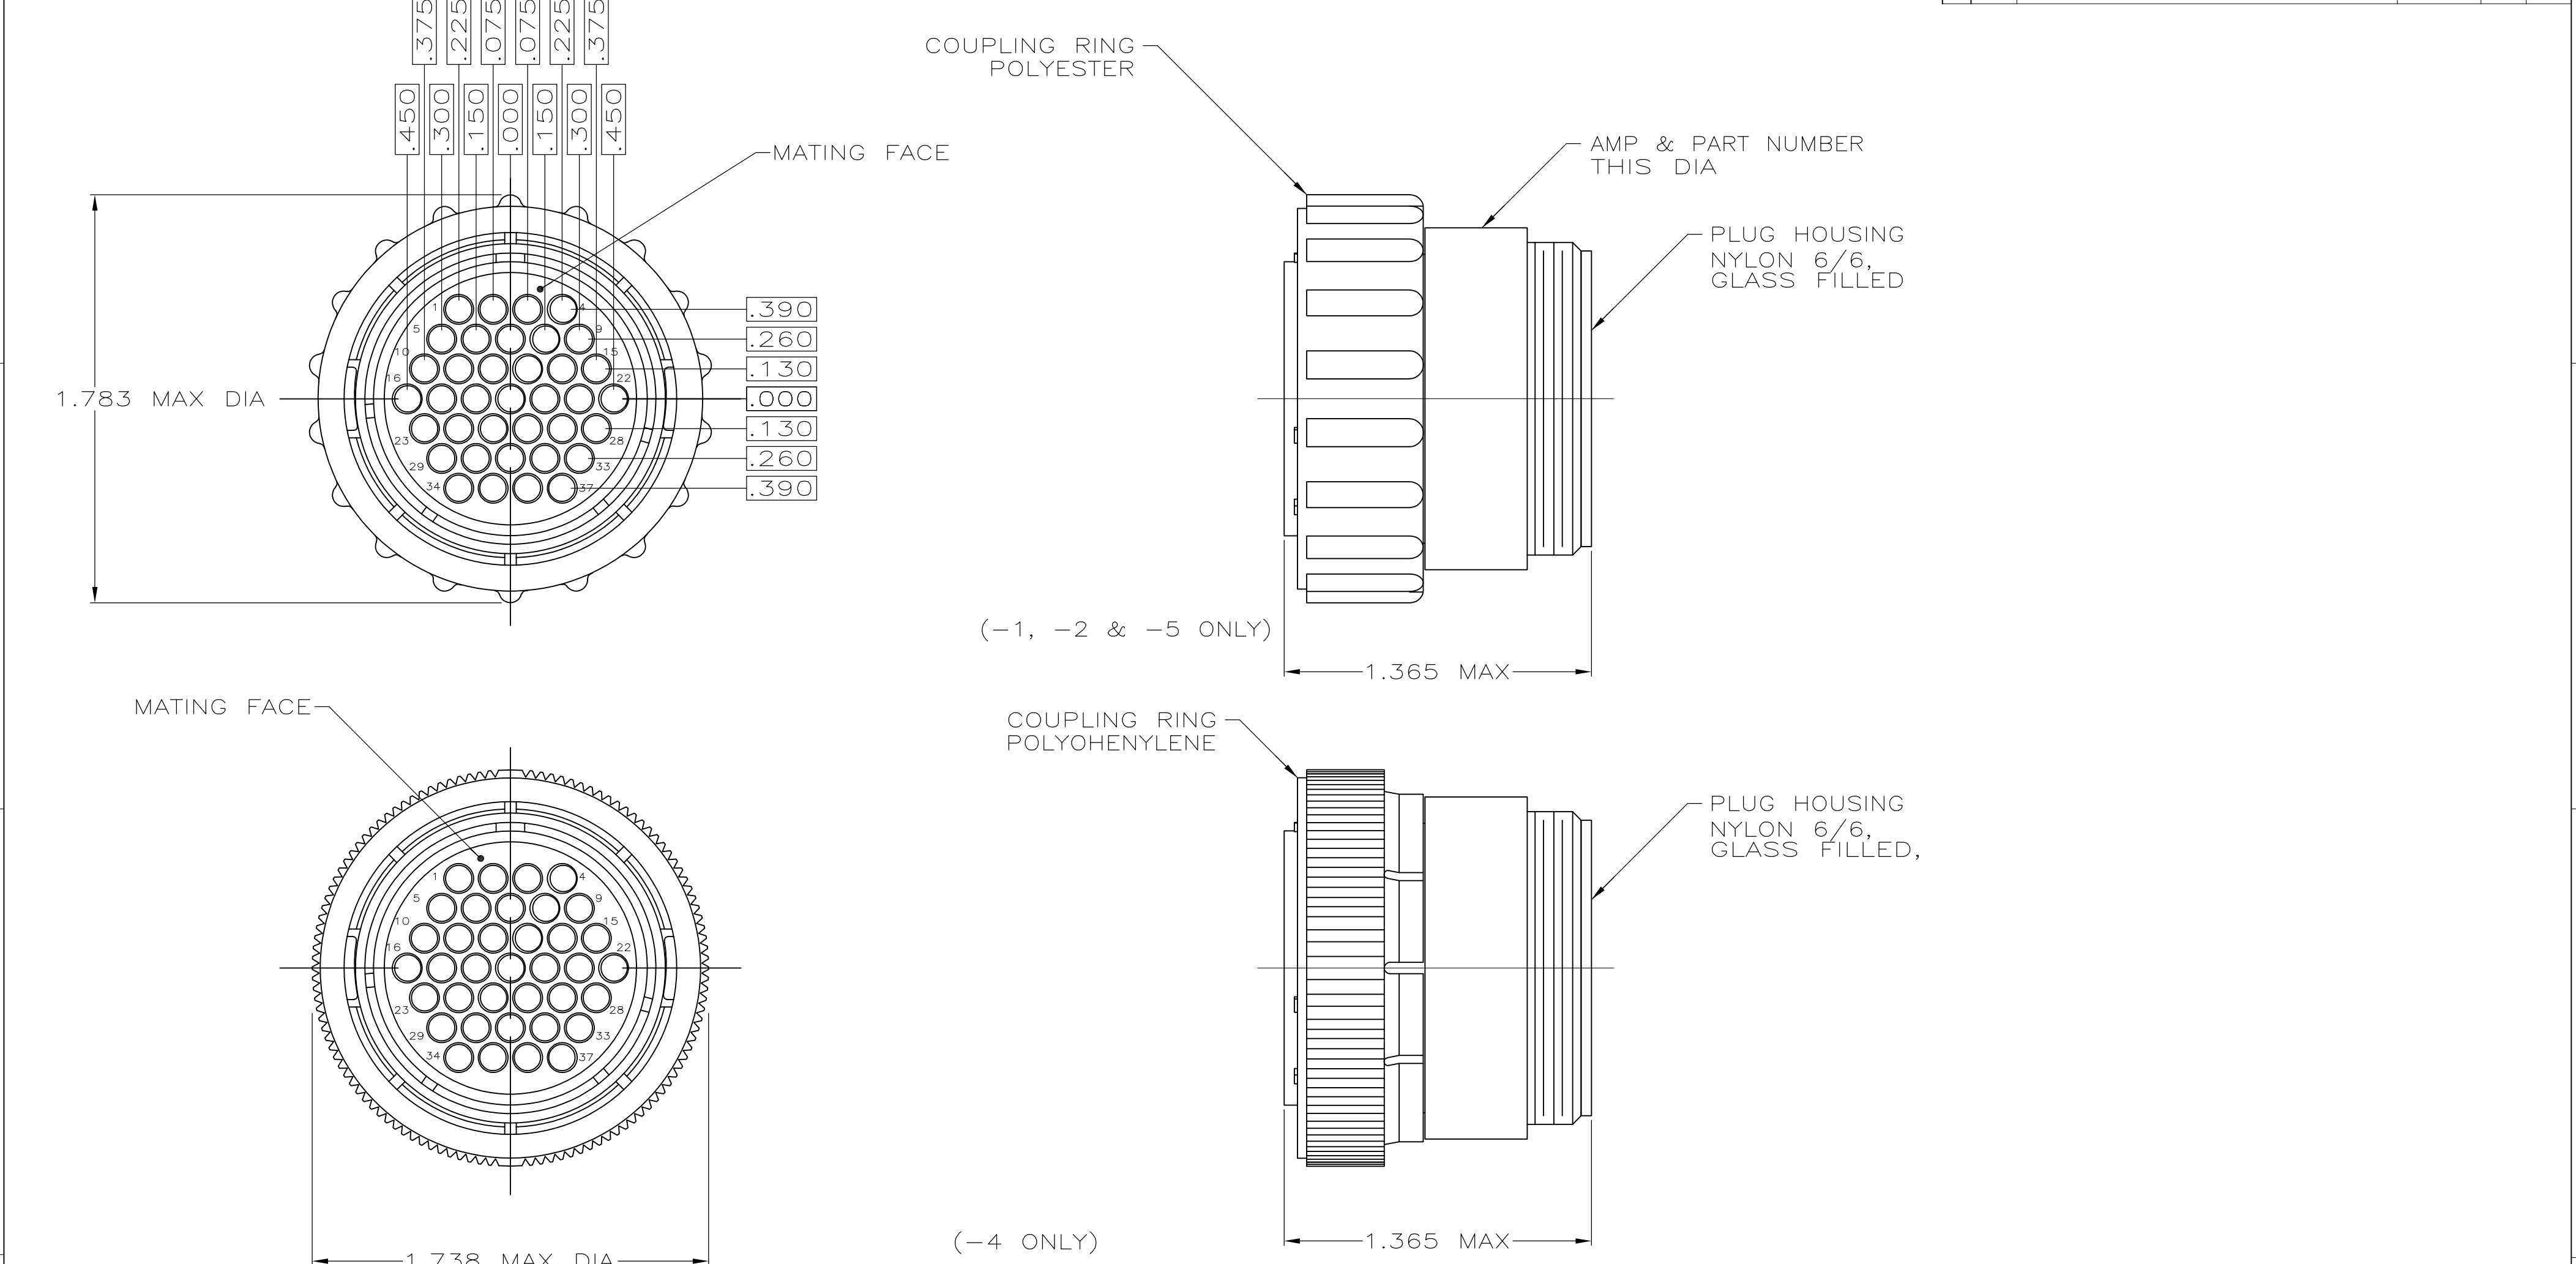

1.CONTACT CAVITIES IDENTIFIED BY CHARACTERS ON FRONT AND REAR FACES OF CONNECTOR.

2.WILL ACCEPT (37) MULTIMATE PIN CONTACTS.

3 PRELIMINARY PART NUMBER.

4 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

3	NATURAL	STANDARD	206305-5	
	BLACK	STANDARD	206305-4	
4	OBSOLETE	BLACK	SMALL PACK	206305-2
	BLACK	STANDARD	206305-1	
	COLOR	PACKAGING	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±	-
1 PLC	±	-
2 PLC	±	-
3 PLC	±	.005
4 PLC	±	-
ANGLES	±	-
FINISH	-	-

MATERIAL

SEE CALLOUT

DWN
S.RIDGLEY BG 8/2/90

CHK
R.STONE 4-26-91

APVD
J.FULPONI 5-2-91

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

TE Connectivity

PLUG ASSEMBLY, SHELL
SIZE 23, REVERSE SEX,
SERIES 1, CPC

SIZE
A2

CAGE CODE
00779

DRAWING NO
C=206305

RESTRICTED TO

SCALE
2:1

SHEET
1 of 1

REV
G2