

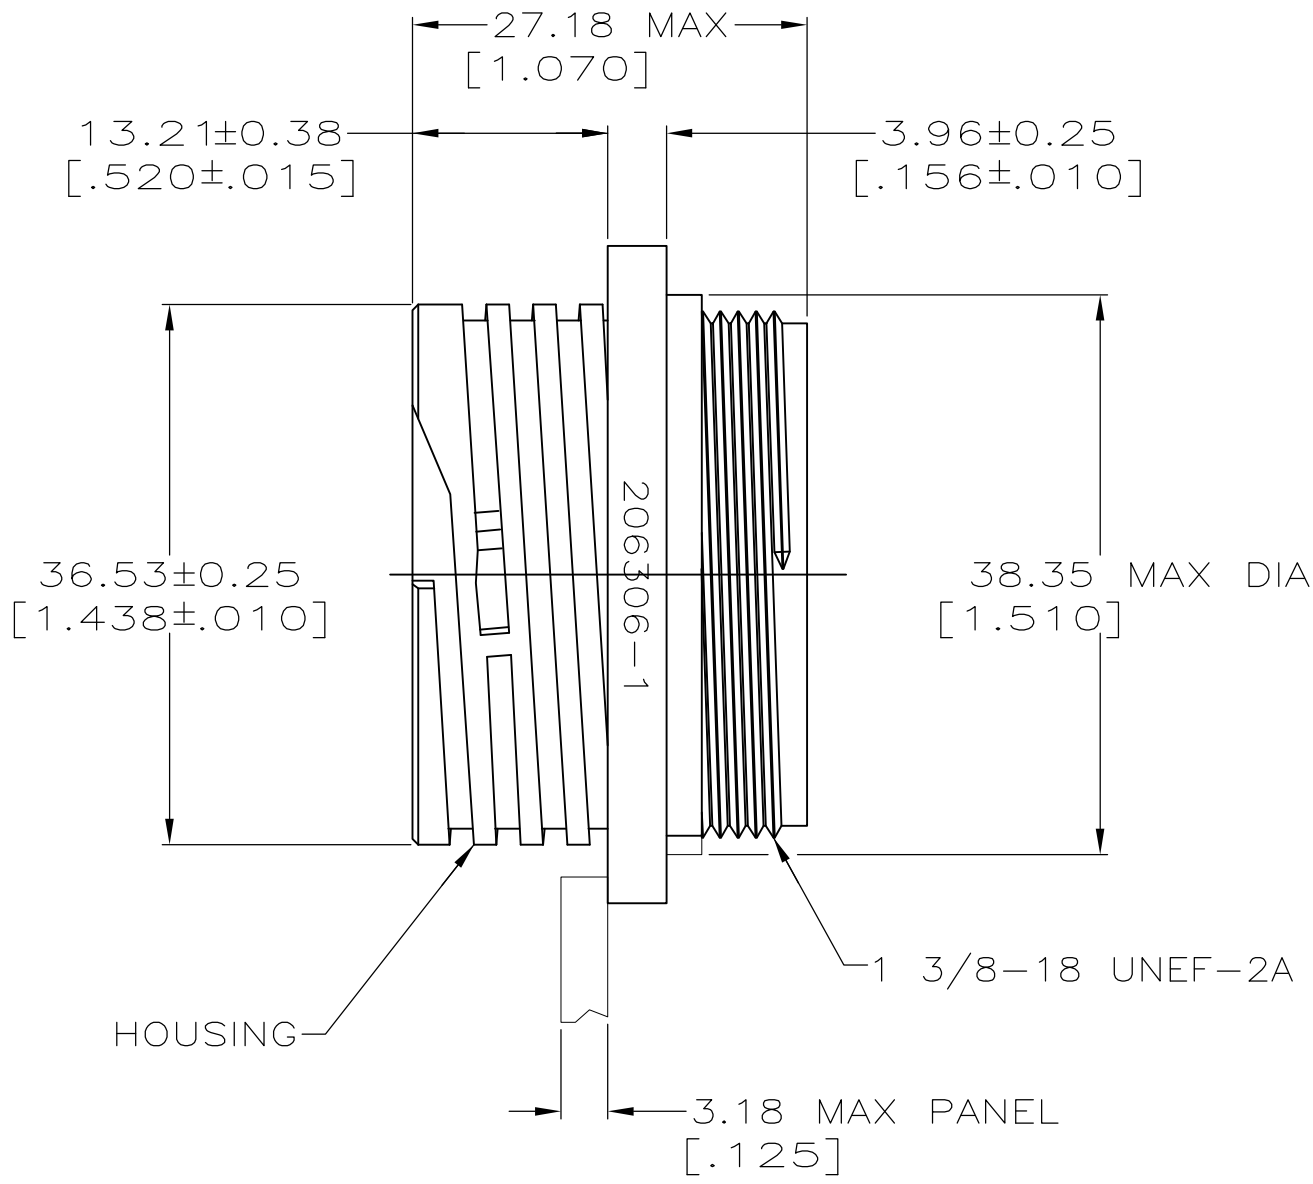
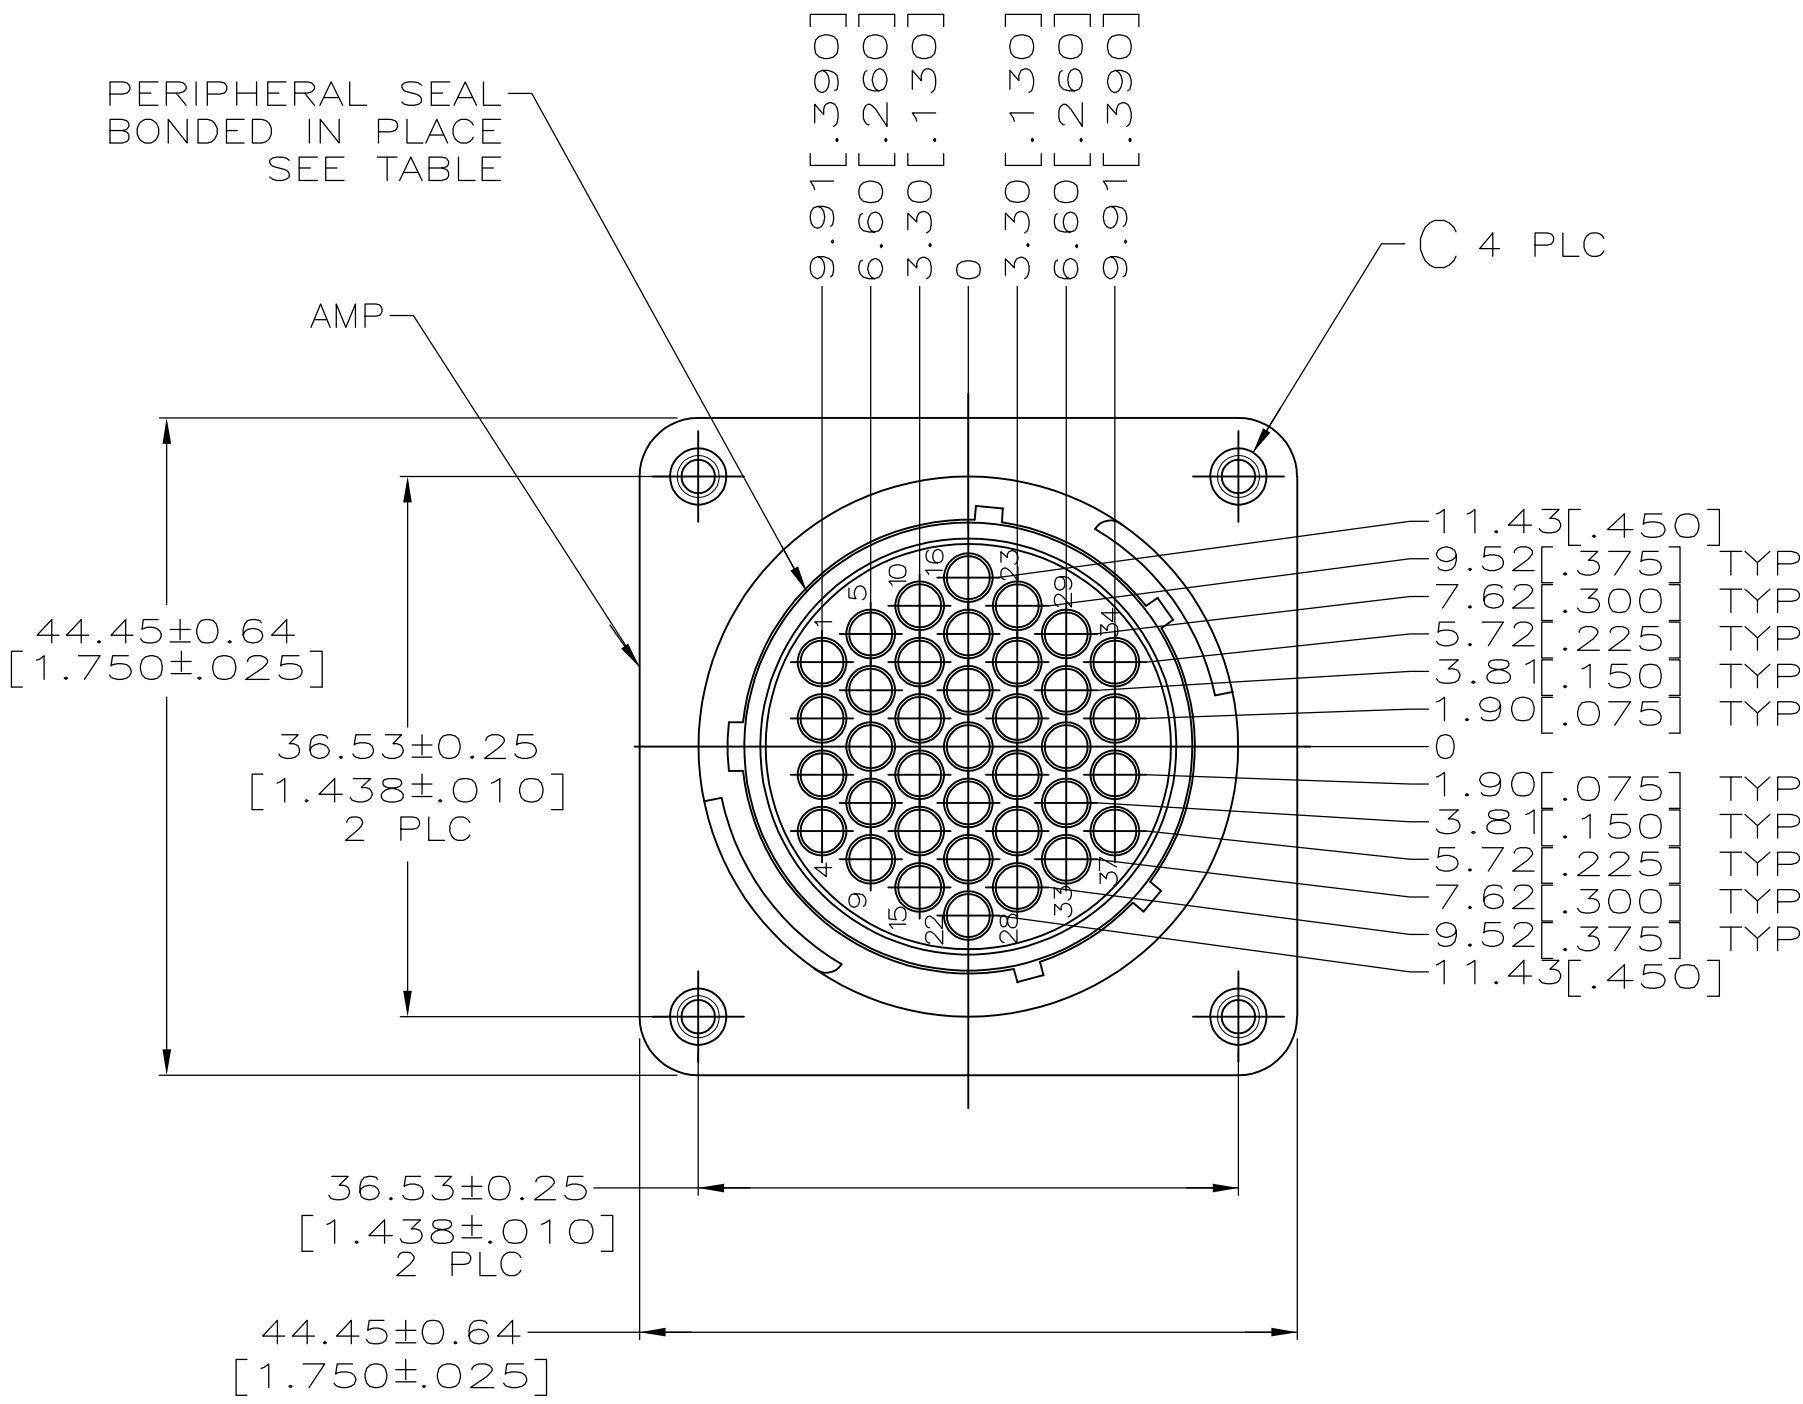
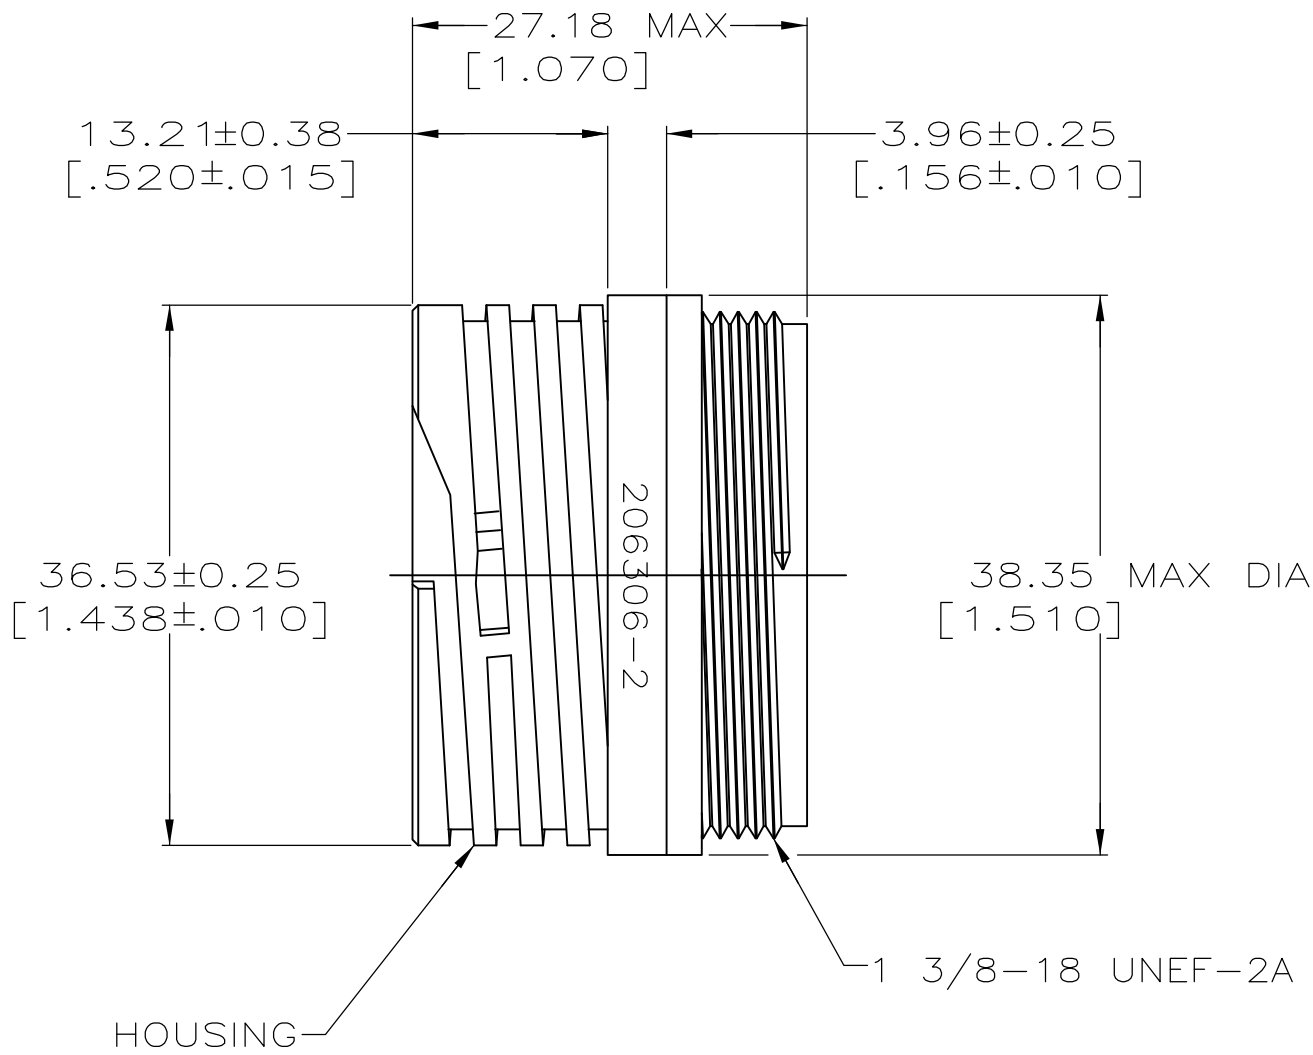


LOC		DIST		REVISIONS						
FT		0		P	LTR	DESCRIPTION		DATE	DWN	APVD
					K2	REVISED PER ECO-11-004587		11MAR11	RK	HMR

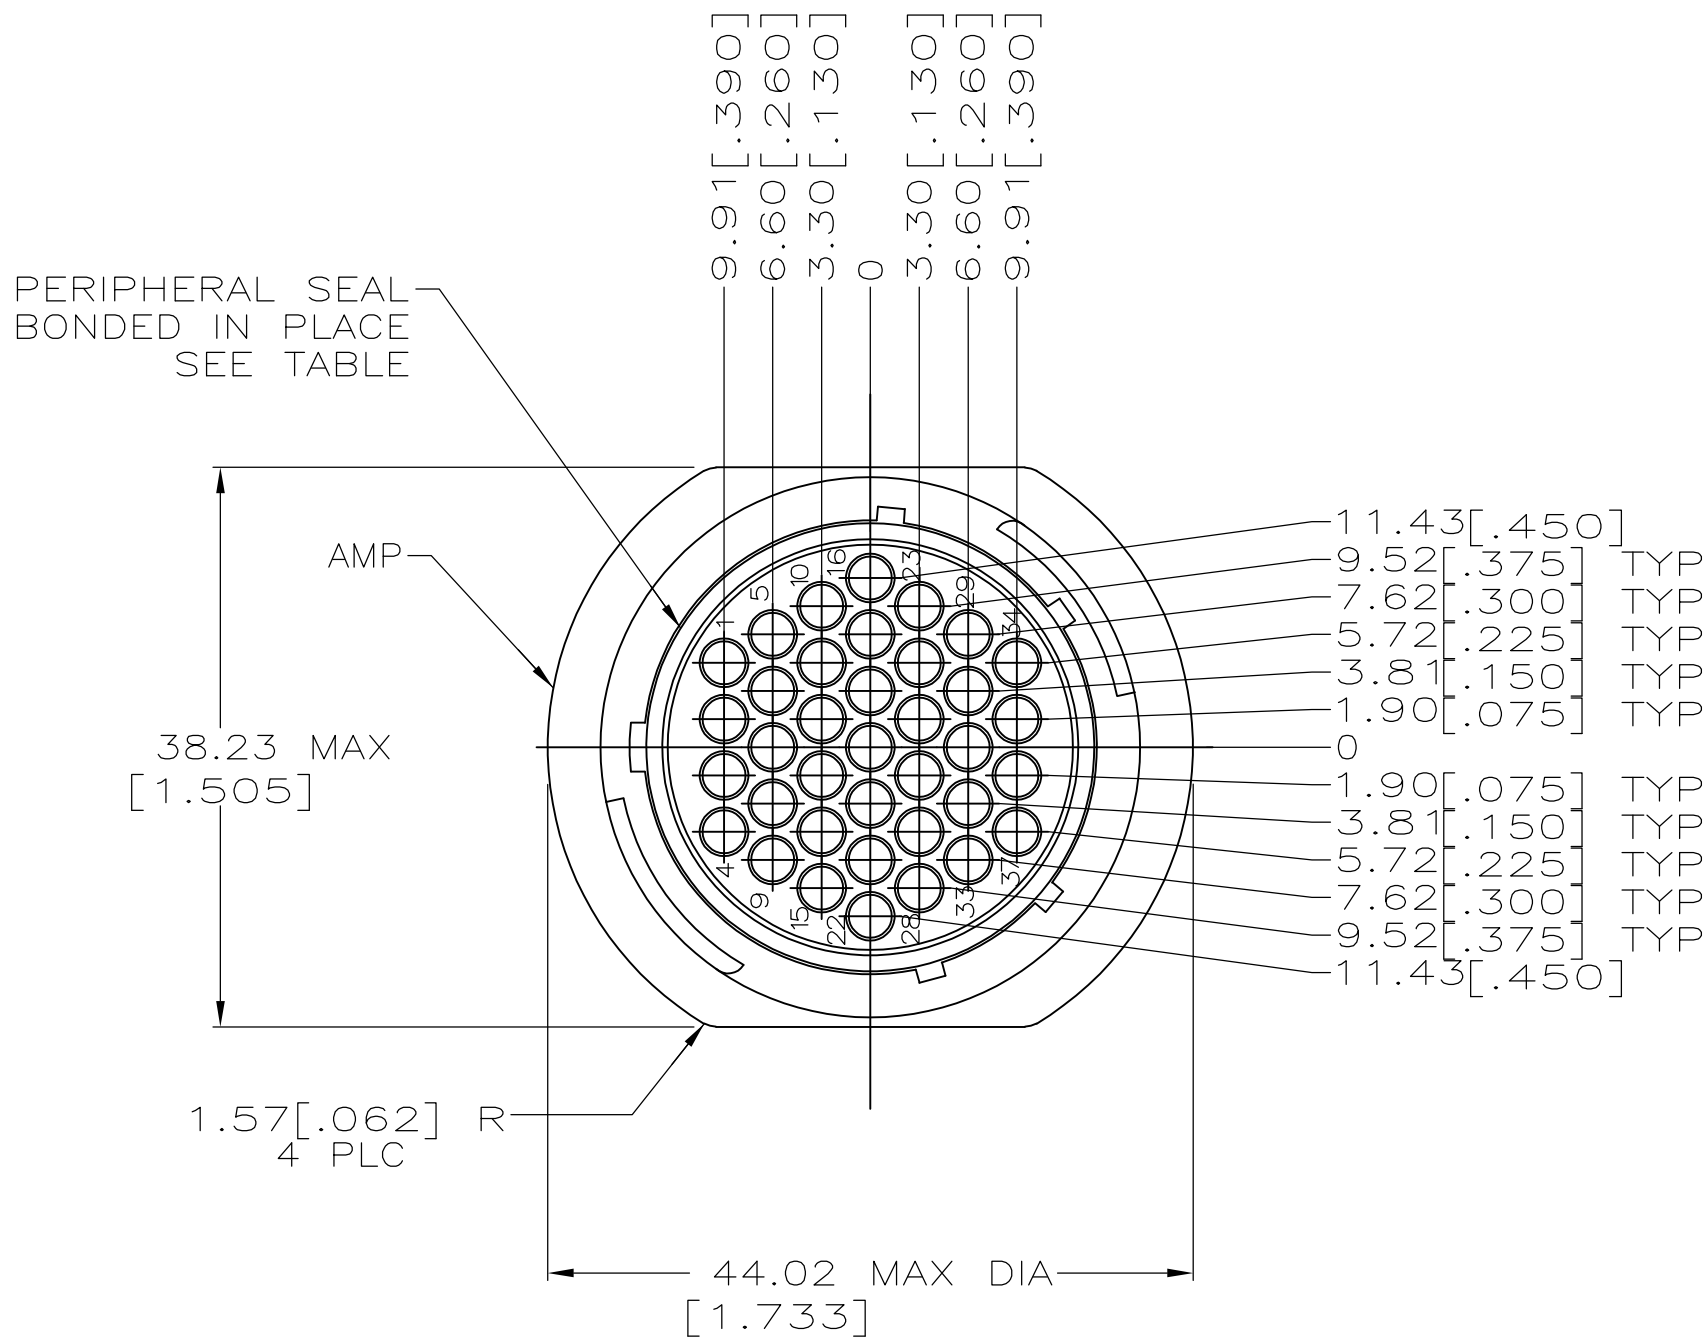

DETAIL A

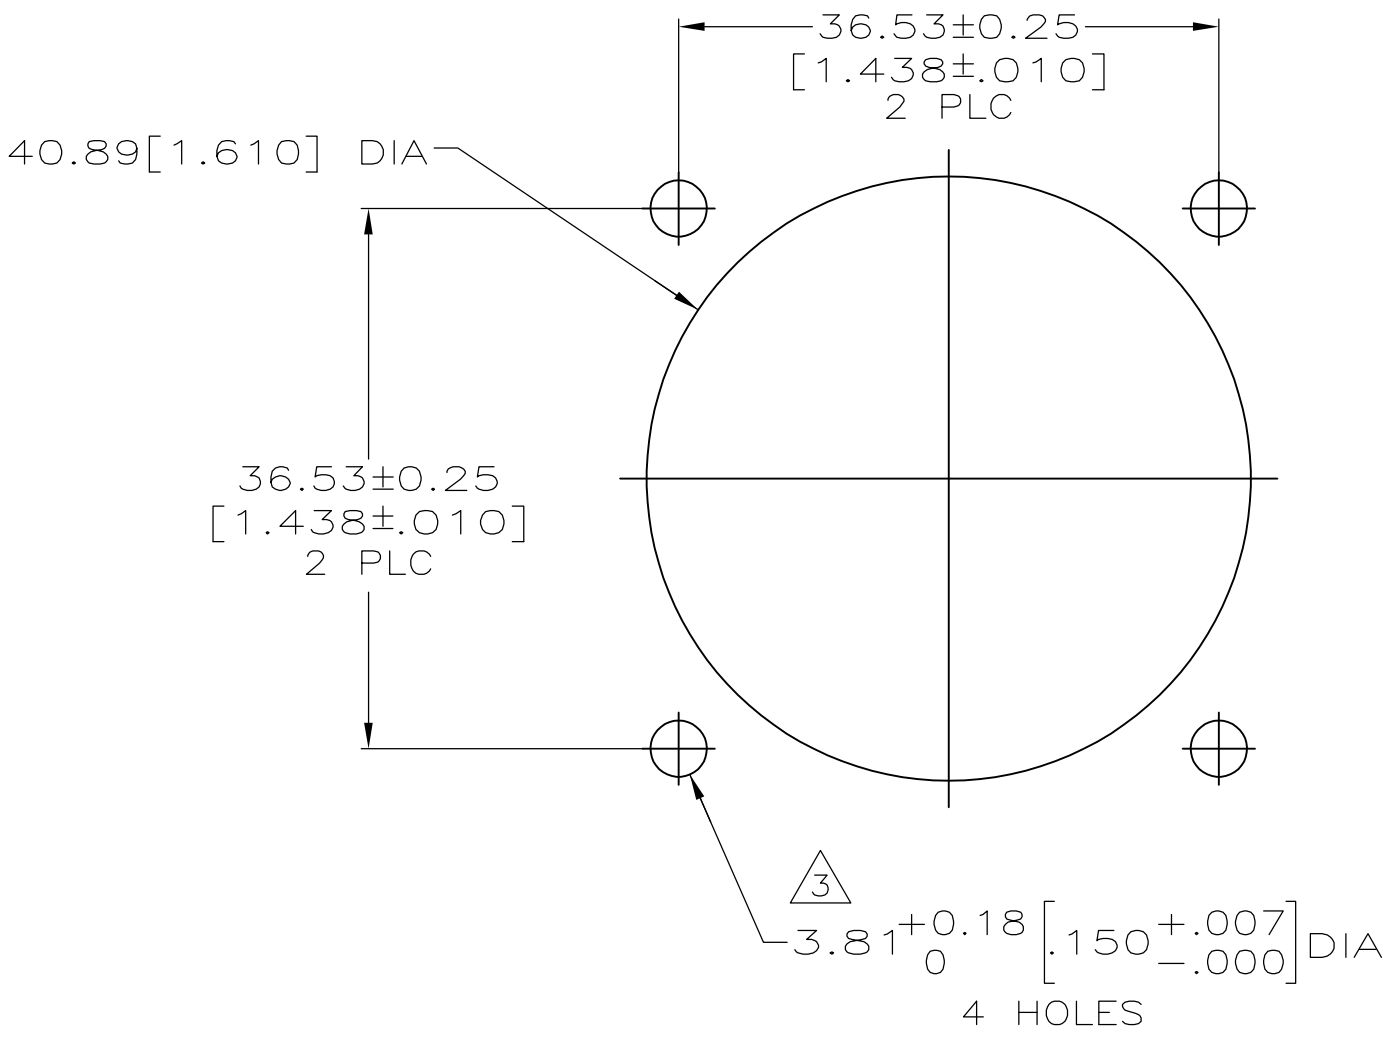


DETAIL B

1. CAVITY IDENTIFICATION ON FRONT AND REAR FACE.
2. WILL ACCEPT THIRTY-SEVEN (37) MULTIMATE SOCKET CONTACTS.
3. NO 4 FASTENER RECOMMENDED FOR MOUNTING.
4. NYLON 6/6, NATURAL.
5. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE 5	STANDARD	NO	3.81 [.150] DIA HOLE	A	206306-8
	SMALL PACK	NO	3.81 [.150] DIA HOLE	A	206306-6
	STANDARD	NO	4-40 THREADED INSERT	A	206306-5
	STANDARD	YES	-	B	206306-4
	STANDARD	YES	3.81 [.150] DIA HOLE	A	206306-3
	STANDARD	NO	-	B	206306-2
	STANDARD	NO	3.81 [.150] DIA HOLE	A	206306-1
	PACKAGING	PERIPHERAL SEAL		SEE DETAIL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN D.GELTZ 07/26/93	 TE Connectivity								
		CHK R.STONE 08/11/93									
DIMENSIONS: MM [INCHES]		APVD A.FRANTUM 08/13/93	NAME	RECEPTACLE HOUSING, REVERSE SEX, SHELL SIZE 23, CPC							
	TOLERANCES UNLESS OTHERWISE SPECIFIED:						PRODUCT SPEC				
	0 PLC ±	±	108-10024								
	1 PLC ±	±	APPLICATION SPEC								
	2 PLC ±	0.13 [.005]	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO					
	4 PLC ±	±	A1	00779	C=206306						
MATERIAL HOUSING: NYLON, BLACK INSERT: BRASS		FINISH	WEIGHT	REV							
ANGLES		±	CUSTOMER DRAWING	SCALE	2:1	SHEET	1	OF	1	REV	K2