

STRIP TERMINALS
"U" PINS STRIP TERMINALS COMPONENT SUPPORT STRIP

"U" PINS STRIP



- Features: Strip Terminal pitch 2.54 mm, Headers breakable to required length, From 2 to 20 positions
- Material: Housing: Black glass filled Thermoplastic UL 94V0, Temperature rating: -40 °C to 125 °C
- Electrical: Dielectric withstanding: 1000 V AC, Insulation resistance: 1000 MΩ mini
- Packaging: Cardboard boxes

Product Code table with columns A, B, C, D, E and corresponding values xxxxxxx, 1xx, 5x0.


Table A: Version, see table

B Number of pins max


Table C: Plating specifications including 0 Gold, 0.2 µm over Ni 1.27 µm, 4 Tin, and 4 µm over Ni 1.27 µm.

Table with 5 columns: Version, P, nn, (a), (b). It lists various product versions and their specifications.


Table with 5 columns: P, 1, 2, 3, 4. It lists pitch values for different pin counts.

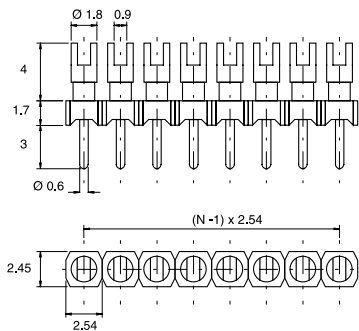


33X08151NN5X1

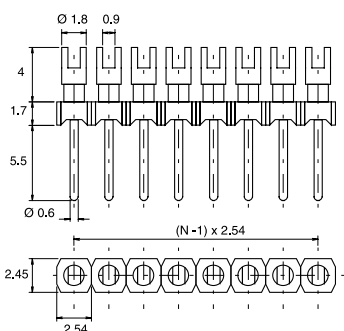

33X08091NN5X1

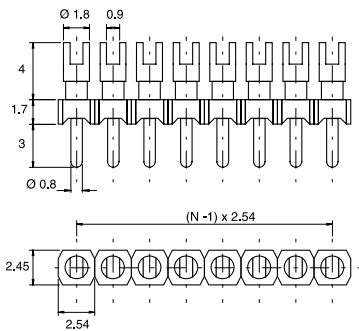

33X06001NN5X1

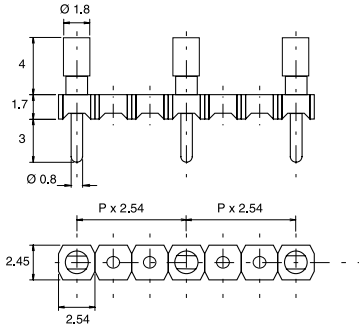

33X0600PNN5X0

"Due to technical progress, all design, specification and components are subject to change without notice".