

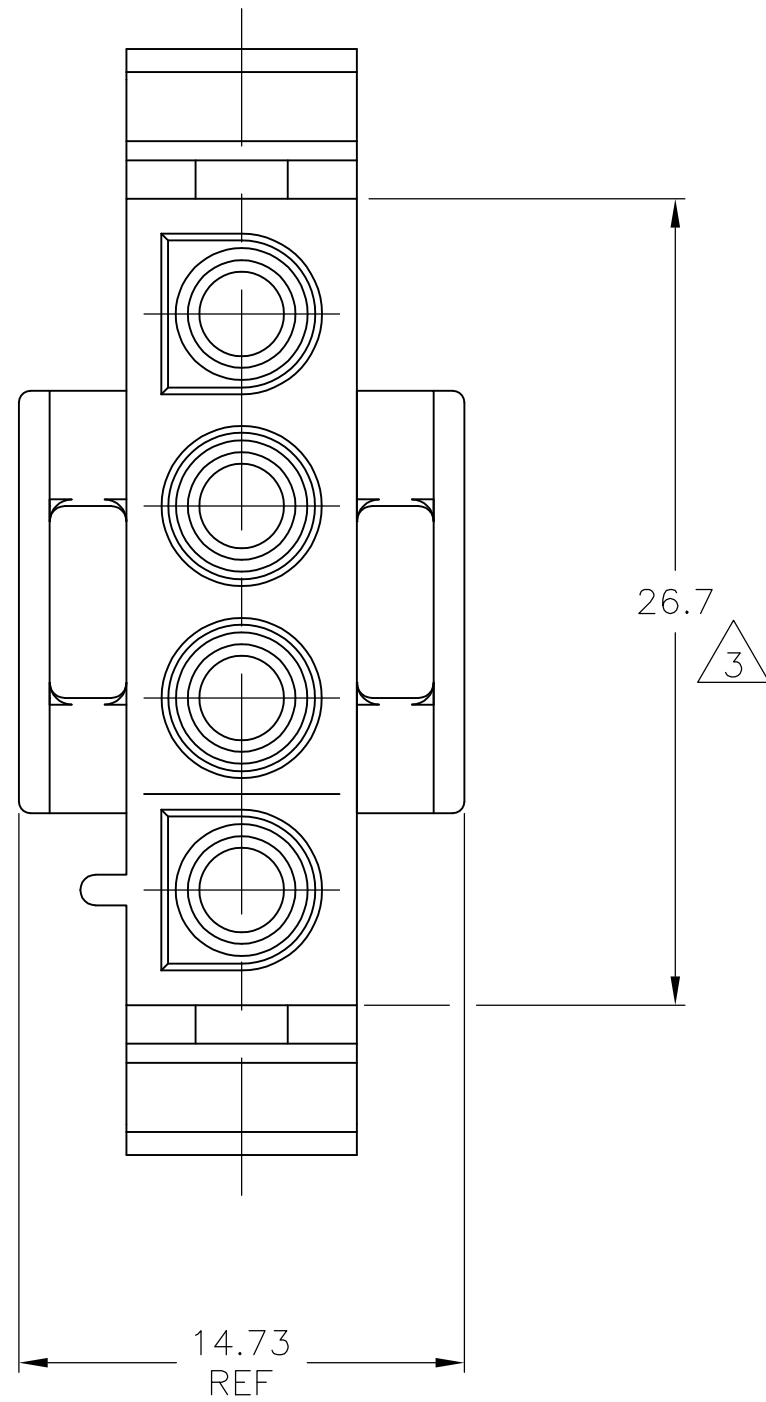
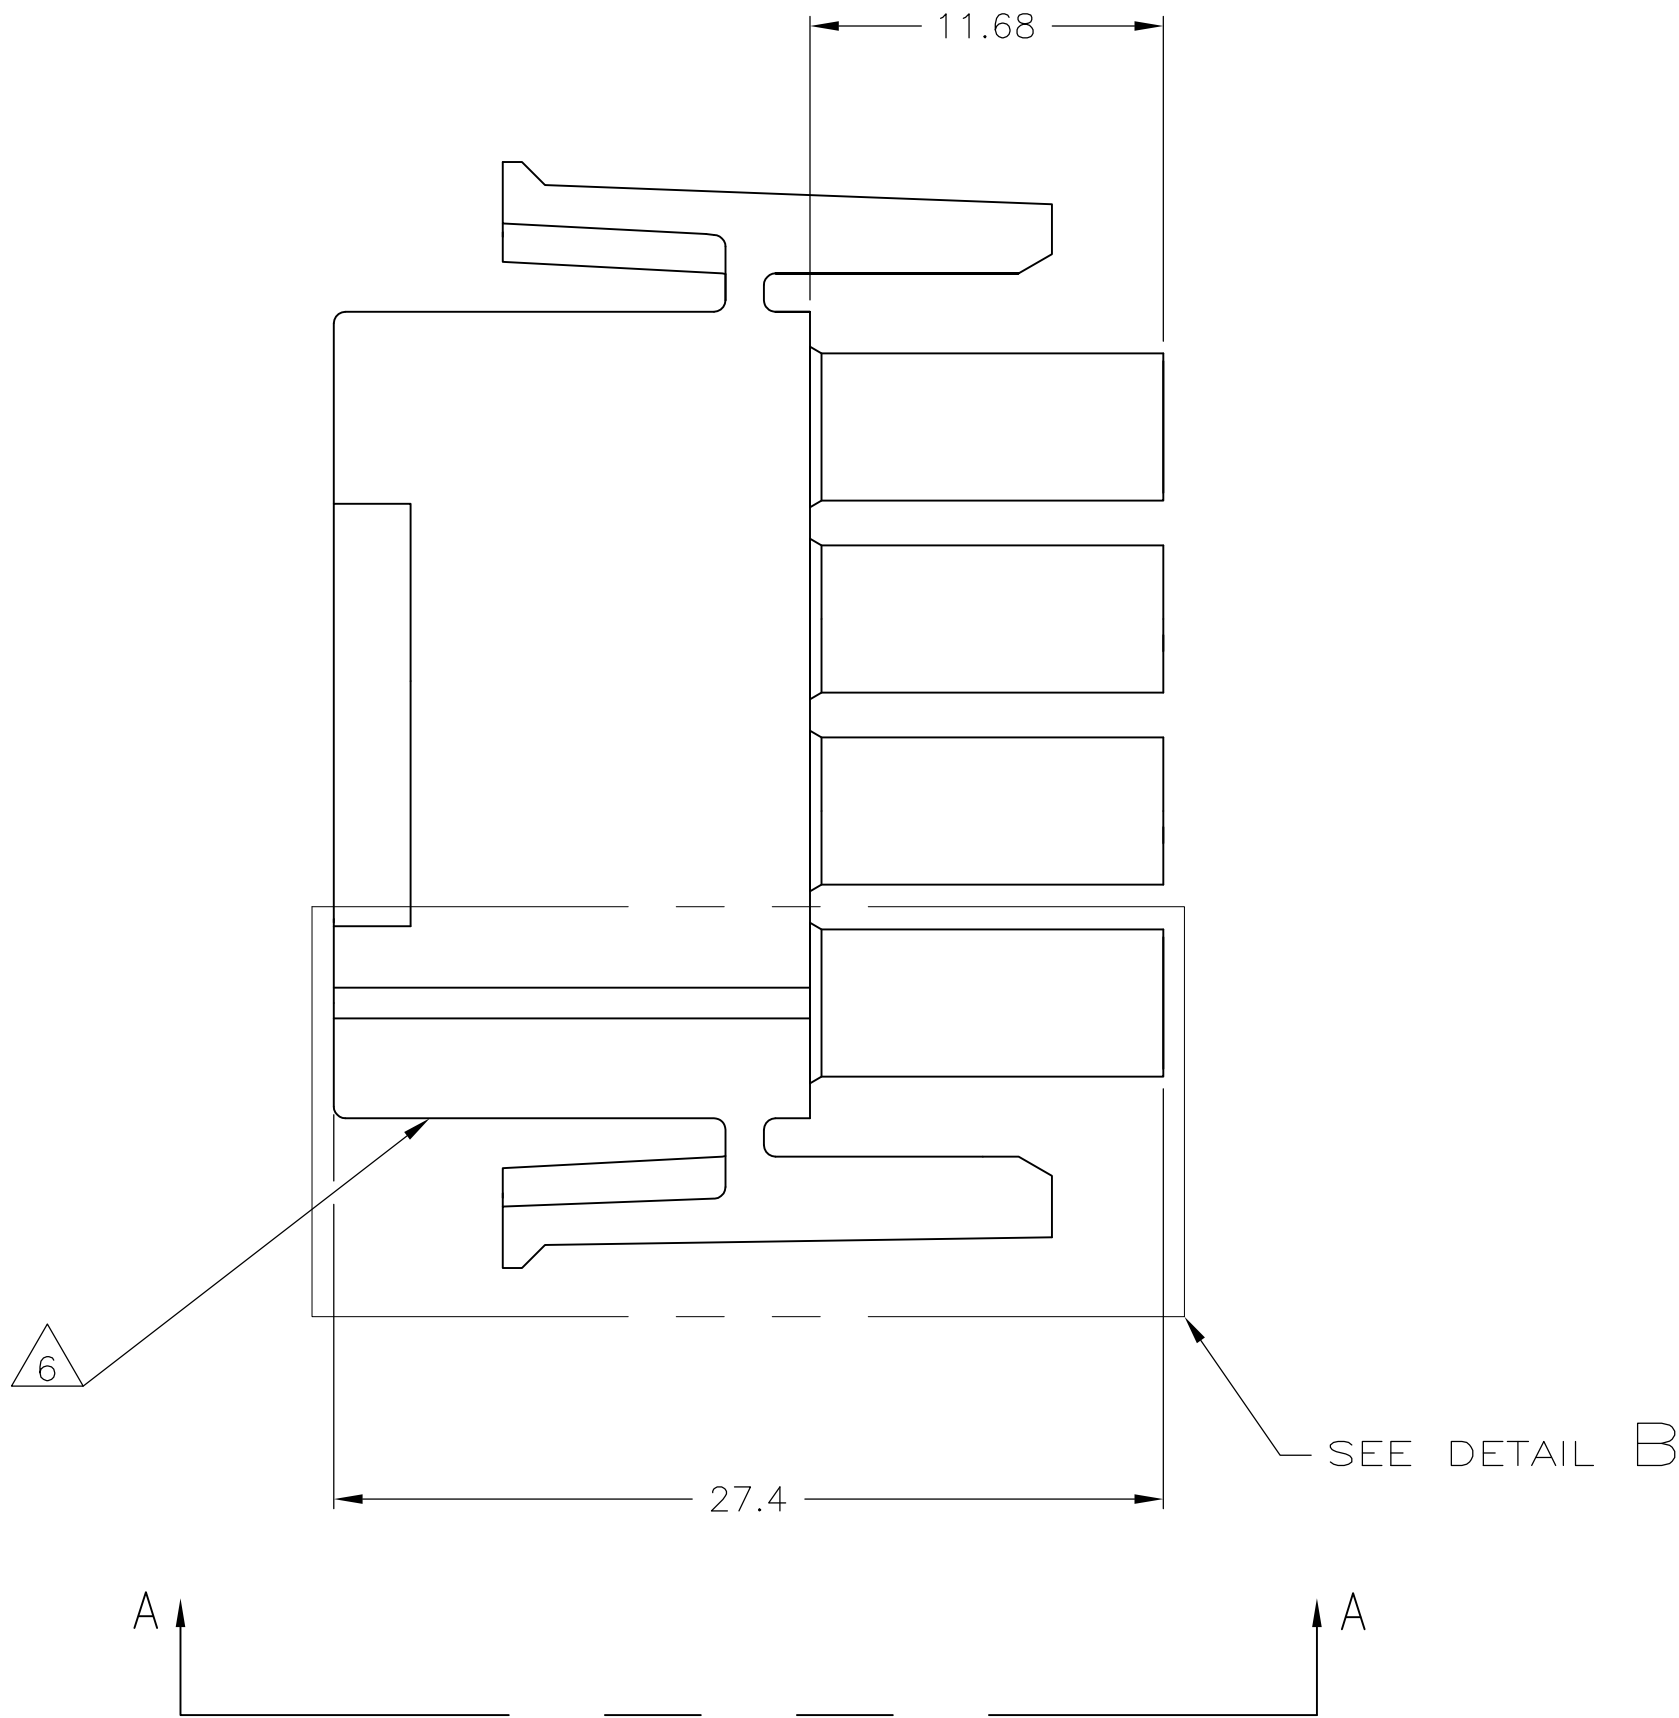
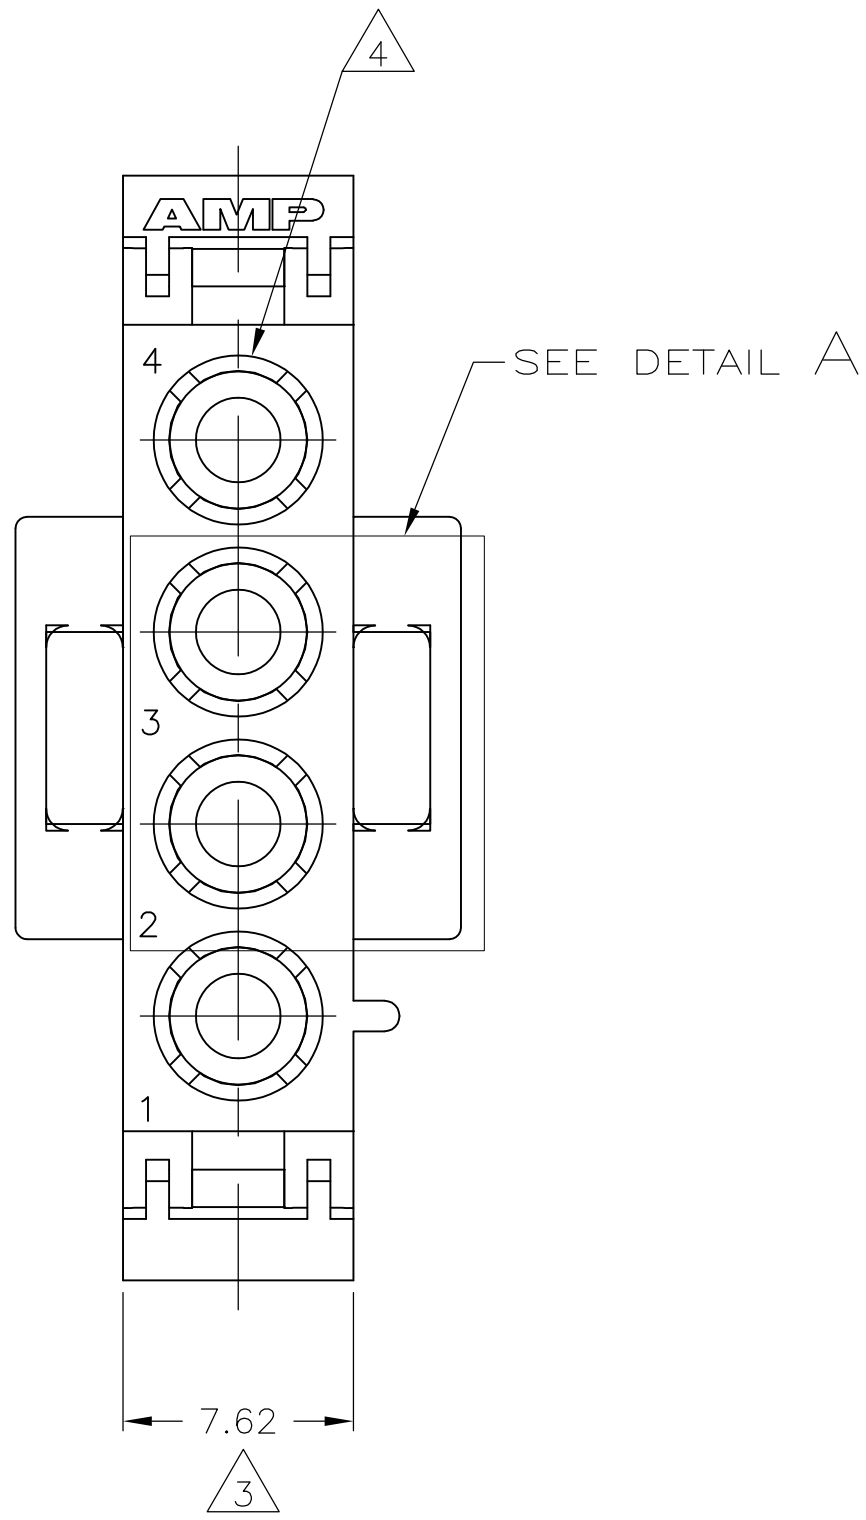
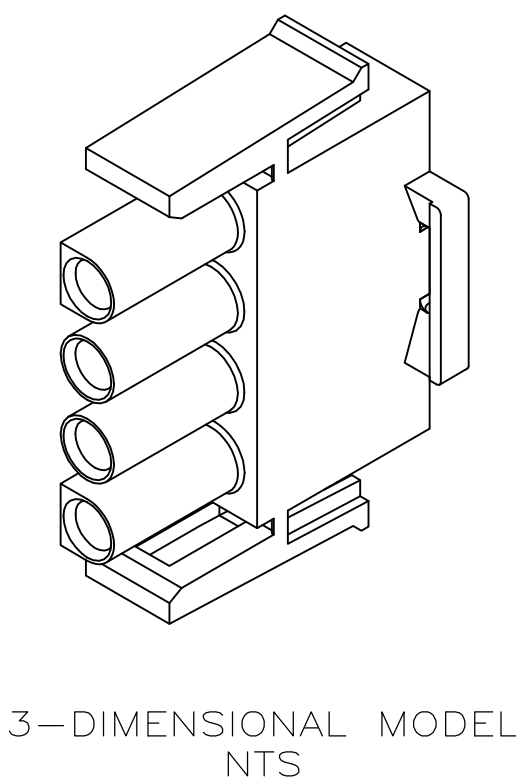
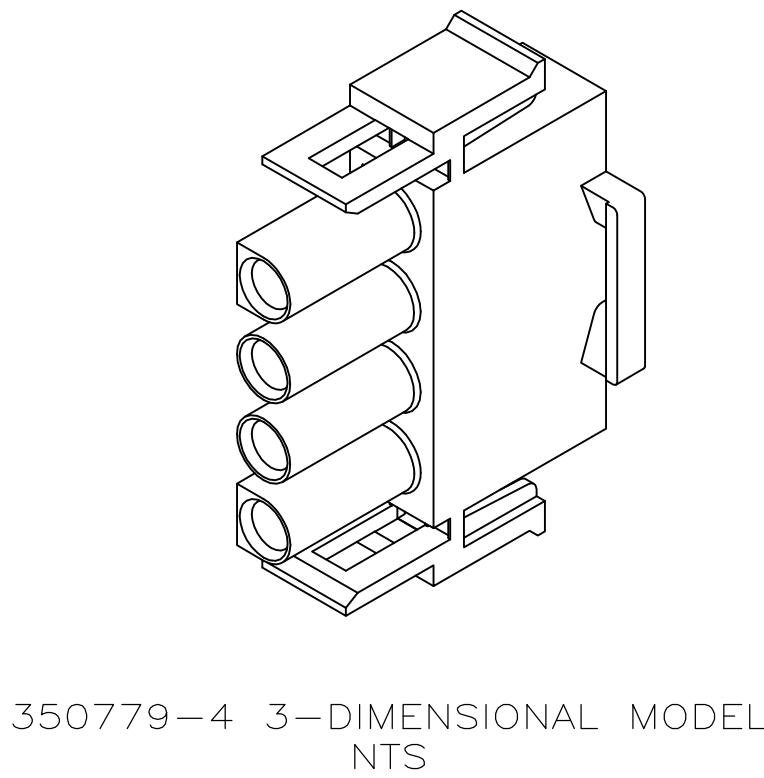
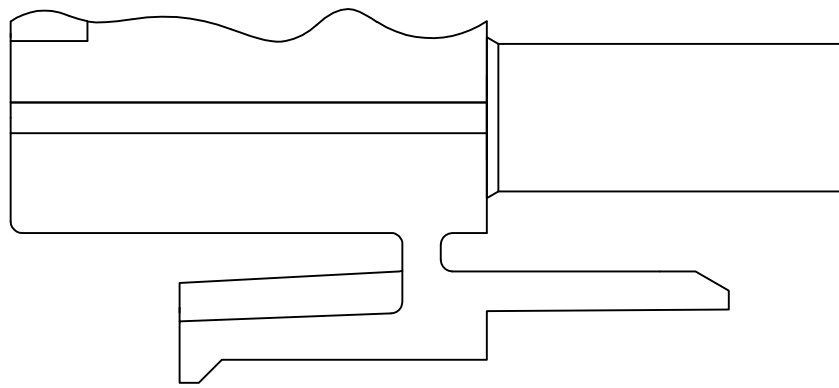
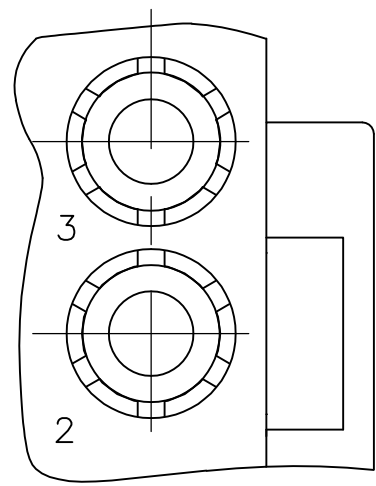


LOC		DIST		REVISIONS					
CM	53	P	LTR	DESCRIPTION			DATE	DWN	APVD
			AB3	REVISED PER ECO-11-017114			23AUG11	JR	TM

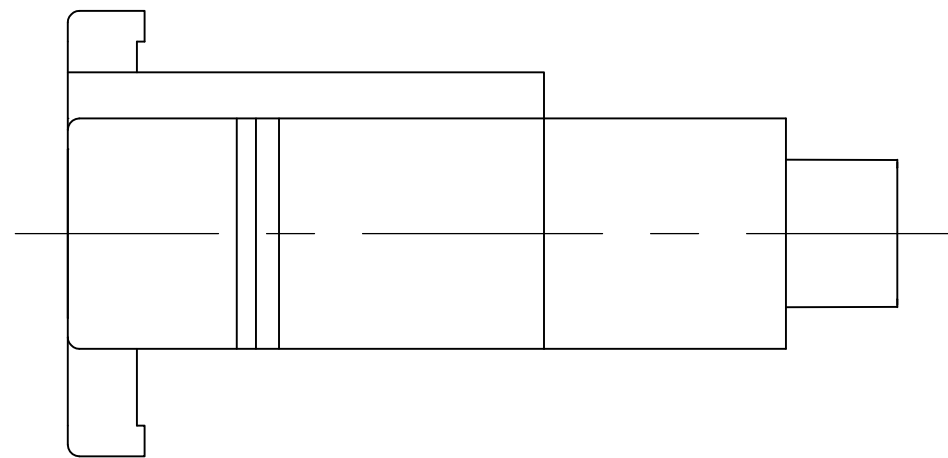

- MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ CAP OR HEADER.
 - SMALL NICKS ARE PERMITTED ON THE CIRCUIT TOWERS WHICH COULD INCREASE THE INITIAL HOUSING MATING FORCE BY UP TO 4.4 NEWTONS [1.0 LBS]. NO INDIVIDUAL NICKED TOWER SHALL INCREASE THIS FORCE BY OVER 2.2 NEWTONS [.5 LBS].
- △3 DIMENSION INDICATED IS AS MOLDED. ADDITIONAL GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR.
- △4 FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION,OPTIONAL.
- △5 NOT MANUFACTURED IN U.S.
- △6 UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.

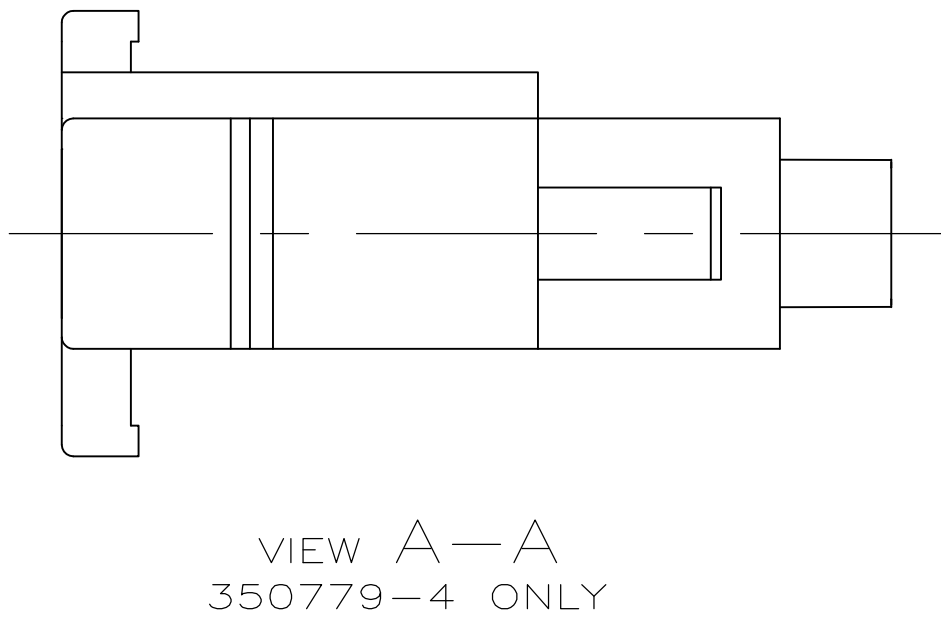

BLACK	1-350779-9
GRAY	1-350779-8
BLUE	1-350779-6
GREEN	1-350779-5
YELLOW	1-350779-4
ORANGE	1-350779-3
RED	1-350779-2
BROWN	1-350779-1
△	350779-4
NATURAL	350779-1
COLOR	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. VESTAL	03FEB95	TE Connectivity	
		CHK R. SWING	03FEB95		
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0. PLC	± .	PLUG, 4 CIRCUIT, UNIVERSAL MATE-N-LOK™	
		1. PLC	± 0.4	—	
		2. PLC	± 0.20	—	
		3. PLC	± .	—	
		4. PLC	± .	—	
		ANGLES	± . 0°30'	—	
MATERIAL NYLON,UL 94V-0		FINISH	—	—	
		WEIGHT	—	—	
		CUSTOMER DRAWING		SCALE 4:1 SHEET 1 OF 1 REV AB3	