

STRIP HEADERS

FEATURES

Pitch 2.54 mm.

Header breakable to required length.

TECHNICAL DATA

Material

Housing: black GF thermoplastic UL94 VO.

Contact: phosphor bronze.

Electrical

Current rating: 4A maxi.

Voltage: 1000 V eff.

Insulation resistance: 1×10^4 M Ω mini

Mechanical


Temperature rating: -55°C to +125°C

Pc board Hole diameter $\varnothing$ 1 mm.

PACKAGING

Recyclable cardboard boxes.

High Temperature

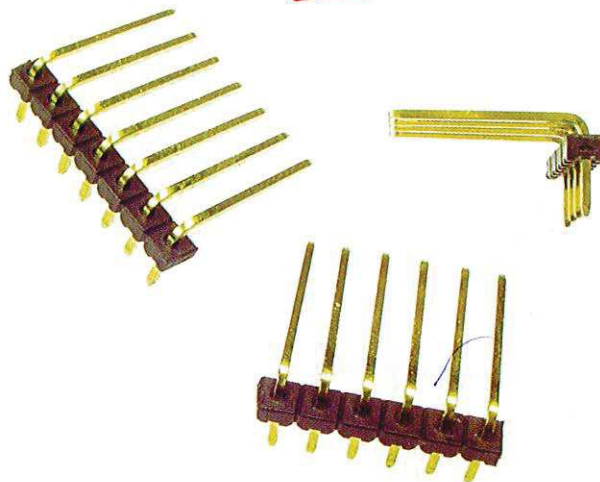

Au	Version	B	C	D
387	15271xx400	3	5.8	3.9
387	02981xx400	3.1	3.3	1.4
387	03581xx400	3.2	4.2	1.4
387	05751xx400	3.2	10.7	1.4
387	03691xx400	3.5	6.5	1.4
387	02111xx400	3.8	14.4	1.4
387	03951xx400	4.5	6.8	1.4

Sn	Version	B	C	D
388	15271xx440	3	5.8	3.9
388	02981xx440	3.1	3.3	1.4
388	03581xx440	3.2	4.2	1.4
388	05751xx440	3.2	10.7	1.4
388	03691xx440	3.5	6.5	1.4
388	02111xx440	3.8	14.4	1.4
388	03951xx440	4.5	6.8	1.4

a	b	c	d	e
387	xxxx	1	xx	400
388	xxxx	1	xx	440

b Version

d Number of contacts per strip from 01 to 40.

e Plating
 0 Gold
 0.2 μ m over Ni 1.27 μ m
 4 Tin 4 μ m over Ni 1.27 μ m
 Other platings on demand.

(N= Number of contacts)

For alternative products see also page 83 and 84.

