





- 1 VA
- 230 V supply voltage by series/parallel connection
 - Vacuum filling
 - One compartment housing
 - Two compartments bobbins 0,8 VA
 - Degree of protection IP 00
 - 50 grams weight

- Resin UL 94 V0
- Design protection against short-circuits
- Insulation voltage 4 KV
- 100 % tested production

Conform to EN 61558 - UL 506

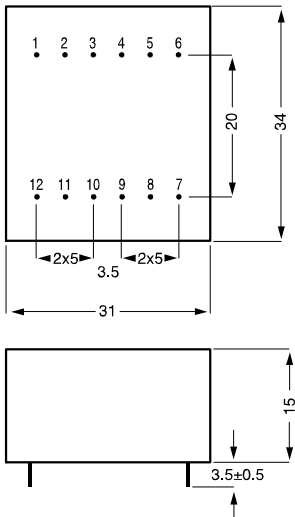

Type 1 VA

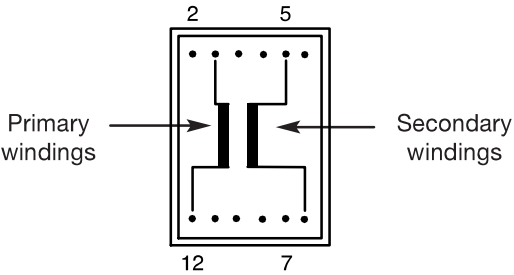

PRIMARY VOLTAGE 230 V					
Protection	Reference	Secondary voltage V	Secondary current m A	No-load voltage V	Ambient Temperature °C
UI 21		230 V		1 VA	
	45001	6	167	11,4	T 70 B
	45002	9	111	17	T 70 B
	45003	12	83	22,8	T 70 B
	45004	15	67	28,5	T 70 B
	45005	18	56	34,2	T 70 B
	45006	24	42	45,6	T 70 B

QUALITY IN SERIES