

Features

Breakable header
Insulator profile 1,7 mm
Pin side dimension 0,63 mm

Material

Insulator:
High temperature thermoplastic
UL 94V0
Contact: Phosphor bronze

Electrical


Current rating: 3A maxi
Dielectric withstanding: 500 V AC
Insulation resistance: 1000 MQ mini

Mechanical

Temperature rating:
-40 °C to 125 °C

Packaging

Cardboard boxes

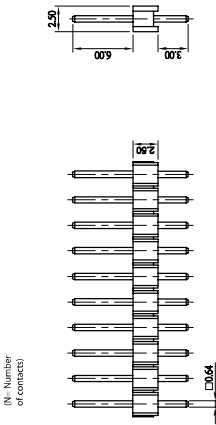

Features

Breakable header
Insulator profile 2,54 mm
Pin side dimension 0,64 mm

Material


Insulator:
High temperature thermoplastic
UL 94V0
Contact: Copper alloy

Electrical

Current rating: 3A maxi
Dielectric withstanding: 1000 V AC
Insulation resistance: 5000 MQ mini

Mechanical

Temperature rating:
-40 °C to 105 °C



Features

Breakable header
Insulator profile 2,6 mm
Pin side dimension 0,6 mm

Material

Insulator:
High temperature thermoplastic
UL 94V0
Contact: Phosphor bronze

Electrical


Current rating: 4A maxi
Dielectric withstanding: 1000 V AC
Insulation resistance: 1000 MQ mini

Mechanical

Temperature rating:
-40 °C to 125 °C
Pc board Hole diameter Ø 1 mm

Packaging

Recyclable cardboard boxes



Features

Breakable header
Insulator profile 2,6 mm
Pin side dimension 0,63 mm

Material

Insulator:
High temperature thermoplastic
UL 94V0
Contact: Phosphor bronze

Electrical

Current rating: 3A maxi
Dielectric withstanding: 500 V
Insulation resistance: 1000 MQ mini

Mechanical

Temperature rating:
-40 °C to 125 °C

Packaging

Cardboard boxes