

MALE HEADER  
MALE HEADER STRAIGHT DOUBLE ROW 2.54 mm

STRIP HEADERS




|            |                                                                                                      |
|------------|------------------------------------------------------------------------------------------------------|
| Features   | Breakable header<br>Insulator profile 2.6 mm<br>Pin side dimension 0.6 mm                            |
| Material   | Insulator: High temperature thermoplastic UL 94V0<br>Contact: Phosphor bronze                        |
| Electrical | Current rating: 4A maxi<br>Dielectric withstanding: 1000 V AC<br>Insulation resistance: 1000 MΩ mini |
| Mechanical | Temperature rating: -40 °C to 125 °C<br>Pc board Hole diameter Ø 1 mm                                |
| Packaging  | Recyclable cardboard boxes                                                                           |

| Product Code |      |     |     |
|--------------|------|-----|-----|
| A            | B    | C   | D   |
| 473          | xxxx | 1xx | 4x0 |

|   |                                                                                                    |
|---|----------------------------------------------------------------------------------------------------|
| B | Version                                                                                            |
| C | Number of contacts from 02 to 80                                                                   |
| D | Plating<br>0 Gold 0.2 µm over Ni 1.27 µm<br>4 Tin 4 µm over Ni 1.27 µm<br>Other platings on demand |

| Version | A    | B    | C   |
|---------|------|------|-----|
| 0358    | 11.2 | 5.4  | 3.2 |
| 1955    | 11.2 | 5.8  | 2.8 |
| 0334    | 12.4 | 6.8  | 3.0 |
| 2801    | 12.9 | 7.3  | 3.0 |
| 0369    | 13.8 | 7.7  | 3.5 |
| 2035    | 13.8 | 7.7  | 3.5 |
| 2754    | 14.5 | 8.8  | 3.1 |
| 2256    | 15.1 | 9.3  | 3.2 |
| 2581    | 16.3 | 10.9 | 2.8 |
| 0575    | 17.7 | 12.0 | 3.1 |
| 1960    | 17.7 | 9.3  | 5.8 |
| 0211    | 22.0 | 15.6 | 3.8 |
| 2804    | 30.8 | 25.2 | 3.0 |
| 0395    | 15.1 | 8.0  | 4.5 |
| 0298    | 10.2 | 4.5  | 3.2 |
| 0543    | 9.2  | 3.3  | 3.3 |
| 0303    | 19.5 | 12.0 | 4.9 |
| 0307    | 30.8 | 22.4 | 5.8 |
| 0306    | 28.3 | 19.9 | 5.8 |
| 0305    | 25.8 | 17.4 | 5.8 |
| 0304    | 23.3 | 14.9 | 5.8 |
| 1844    | 16.3 | 7.9  | 5.8 |
| 1958    | 14.5 | 6.1  | 5.8 |
| 1956    | 12.4 | 4.0  | 5.8 |

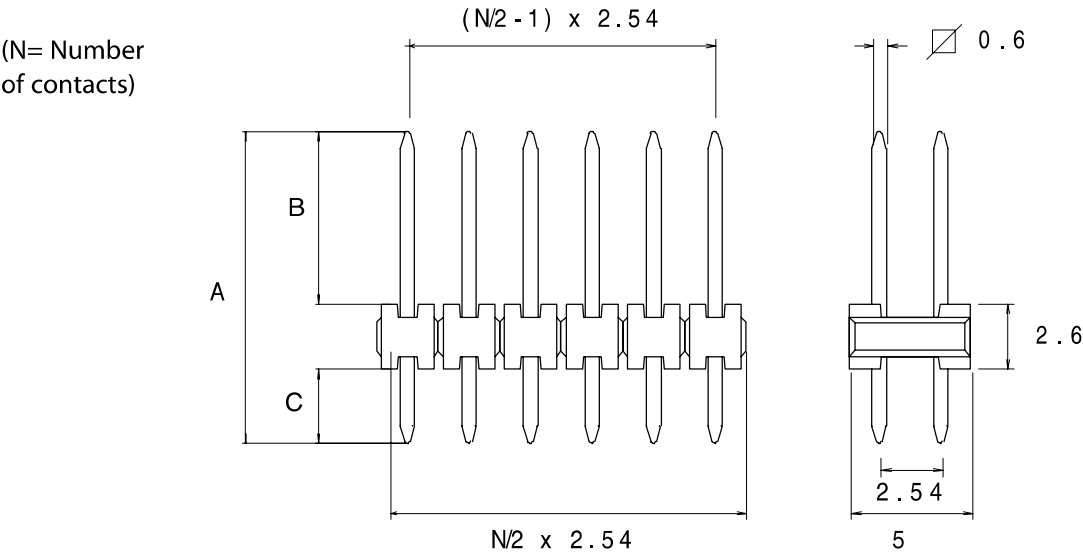

“Due to technical progress, all design, specification and components are subject to change without notice”.