



NYLON

X.B. components, s.a.
www.xbcomponents.com
+34 902 332 332




Fully Insulated Female Disconnectors



Insulation material: Polyamide (NYLON)
Max. electrical rating: 300V - 105°C

WITH COPPER SLEEVE



EASY ENTRY


Part N°	Section mm ² /AWG	Dimensions (mm)	B	b	L	D	E	
EFCC-15028-2	0.25-1.65	2.8 x 0.5 x 19.00	3.00	5.40	19.00	3.60	10.50	100/1000
EFCC-15028-2-1	22-16	2.8 x 0.8 x 19.00	3.00	5.40	19.00			
EFCC-15048-2		4.8 x 0.5 x 19.50	5.00	7.40	19.50			
EFCC-15048-2-1		4.8 x 0.8 x 19.50	5.00	7.40	19.50			
EFCC-15063-2		6.4 x 0.8 x 21.50	6.80	9.00	21.50			
EFCC-25048-2	1.04-2.63	4.8 x 0.5 x 20.00	5.00	7.40	20.00	4.30	11.00	100/1000
EFCC-25048-2-1	16-14	4.8 x 0.8 x 20.00	5.00	7.40	20.00			
EFCC-25063-2		6.4 x 0.8 x 22.00	6.80	9.00	22.00			
EFCC-55063-2	2.63-6.64 12-10	6.4 x 0.8 x 26.00	6.80	9.00	26.00	5.70	14.00	50/500

Insulated Piggyback Disconnectors



Insulation material: Polyamide (NYLON)
Max. electrical rating: 300V - 105°C

WITH COPPER SLEEVE

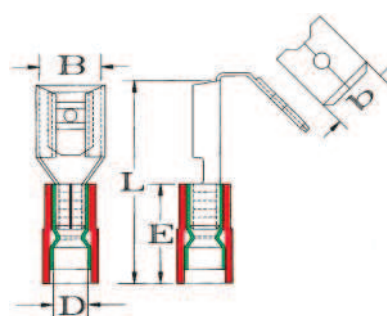

EASY ENTRY

Part N°	Section mm ² /AWG	Dimensions (mm)	B	b	L	D	E	
EFCC-15635-1	0.25-1.65 22-16	6.4 x 0.8 x 22.50	6.50	6.30	22.50	3.60	10.50	100/1000
EFCC-25635-1	1.04-2.63 16-14	6.4 x 0.8 x 23.00	6.50	6.30	23.00	4.30	11.00	100/1000
EFCC-55635-1	2.63-6.64 12-10	6.4 x 0.8 x 26.00	6.50	6.30	26.00	5.70	14.00	50/500