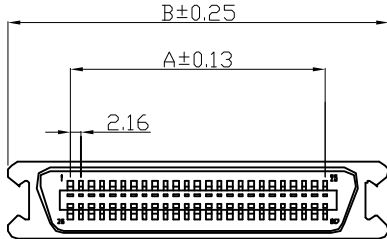
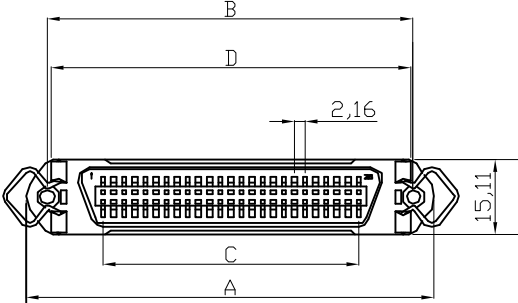
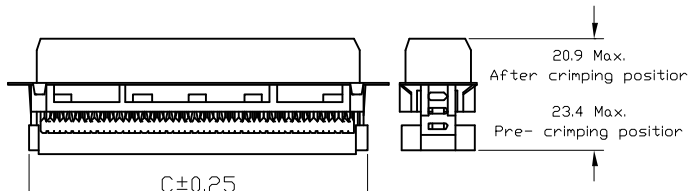
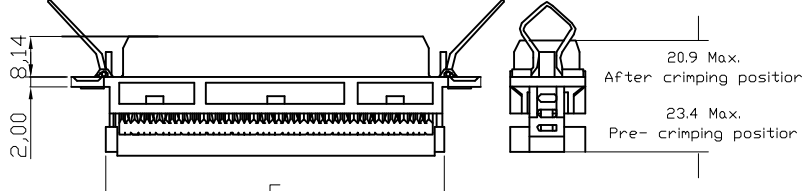


	1	2	3	4	5	6	7																																																																															
A	  Product Specification Material Insulator :Glass-Filled Thermoplastic PBT,UL94V-0 rated,Blue Contact :Brass ,Gold flash selective gold Shell :Steel, 100u" Tin Over 50u" min Nickel. Electrical Contact Resistance :20 milliohms Max at 1 AMP DC. Insulation Resistance :1000 magohms at 500 VDC Dielectric Withstanding Voltage : 1000 VAC/rms 60Hz for 1 minute Current Rating :3 AMP Volatge Rating :250 VAC/rms 60Hz   A-57/xx MFR-N Metal shell (Male) Dimensions Positions <table><tr><td></td><td>A</td><td>B</td><td>C</td><td>D</td></tr><tr><td>24</td><td>23.76</td><td>48.6</td><td>35.5</td><td>37.5</td></tr><tr><td>36</td><td>36.72</td><td>61.6</td><td>53.3</td><td>54.4</td></tr><tr><td>50</td><td>51.84</td><td>76.7</td><td>68.5</td><td>70.5</td></tr></table> A-57/xx FFR-N Metal shell (Female) Dimensions Positions <table><tr><td></td><td>A±0.25</td><td>B±0.13</td><td>C±0.13</td><td>D±0.25</td><td>E±0.25</td></tr><tr><td>24</td><td>54.70</td><td>46.78</td><td>23.76</td><td>45.95</td><td>35.50</td></tr><tr><td>36</td><td>67.80</td><td>59.74</td><td>36.72</td><td>58.80</td><td>53.30</td></tr><tr><td>50</td><td>82.80</td><td>74.85</td><td>51.84</td><td>74.25</td><td>68.50</td></tr></table>								A	B	C	D	24	23.76	48.6	35.5	37.5	36	36.72	61.6	53.3	54.4	50	51.84	76.7	68.5	70.5		A±0.25	B±0.13	C±0.13	D±0.25	E±0.25	24	54.70	46.78	23.76	45.95	35.50	36	67.80	59.74	36.72	58.80	53.30	50	82.80	74.85	51.84	74.25	68.50																																			
	A	B	C	D																																																																																		
24	23.76	48.6	35.5	37.5																																																																																		
36	36.72	61.6	53.3	54.4																																																																																		
50	51.84	76.7	68.5	70.5																																																																																		
	A±0.25	B±0.13	C±0.13	D±0.25	E±0.25																																																																																	
24	54.70	46.78	23.76	45.95	35.50																																																																																	
36	67.80	59.74	36.72	58.80	53.30																																																																																	
50	82.80	74.85	51.84	74.25	68.50																																																																																	
B																																																																																						
C																																																																																						
D																																																																																						
E																																																																																						
F																																																																																						
G	RoHS compliant <table><tr><td>Scale</td><td>1:1</td><td></td><td></td><td></td><td></td><td>Date</td><td>Name</td><td>Customer-No.</td></tr><tr><td>TOLERANCE</td><td></td><td></td><td></td><td></td><td>Drawn</td><td>17.05.2006</td><td>Hellwig</td><td></td></tr><tr><td>X.</td><td>±0.38</td><td></td><td></td><td></td><td>Approved</td><td>30.06.2009</td><td>Hellwig</td><td></td></tr><tr><td>X.X</td><td>±0.25</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>X.XX</td><td>±0.13</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>Angle</td><td></td><td>②</td><td>Update</td><td>30.06.2009</td><td>Dean</td><td colspan="3" rowspan="2"> ASSMANN WSW components </td></tr><tr><td>X.°</td><td>±3°</td><td>①</td><td>Drawn</td><td>17.05.2006</td><td>Hellwig</td></tr><tr><td>X.X°</td><td>±1°</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td>Id.</td><td>Modification</td><td>Date</td><td>Name</td><td></td><td></td><td></td></tr></table>							Scale	1:1					Date	Name	Customer-No.	TOLERANCE					Drawn	17.05.2006	Hellwig		X.	±0.38				Approved	30.06.2009	Hellwig		X.X	±0.25								X.XX	±0.13								Angle		②	Update	30.06.2009	Dean	ASSMANN WSW components			X.°	±3°	①	Drawn	17.05.2006	Hellwig	X.X°	±1°										Id.	Modification	Date	Name				
Scale	1:1					Date	Name	Customer-No.																																																																														
TOLERANCE					Drawn	17.05.2006	Hellwig																																																																															
X.	±0.38				Approved	30.06.2009	Hellwig																																																																															
X.X	±0.25																																																																																					
X.XX	±0.13																																																																																					
Angle		②	Update	30.06.2009	Dean	ASSMANN WSW components																																																																																
X.°	±3°	①	Drawn	17.05.2006	Hellwig																																																																																	
X.X°	±1°																																																																																					
		Id.	Modification	Date	Name																																																																																	
H	ASSMANN WSW-No. A-57/xx FFR-N A-57/xx MFR-N Drawing-No. ASS 0126 CO rev02 Replace Sheet																																																																																					
	1	2	3	4	5	6	7																																																																															