


Adapter leads XLAM-SLK-4N...

Highly flexible, fully shielded adapter leads.
One end with coaxial cable with touch-protected BNC male connector, other end with

in-line Ø 4 mm MULTILAM plugs with rigid insulating sleeve.

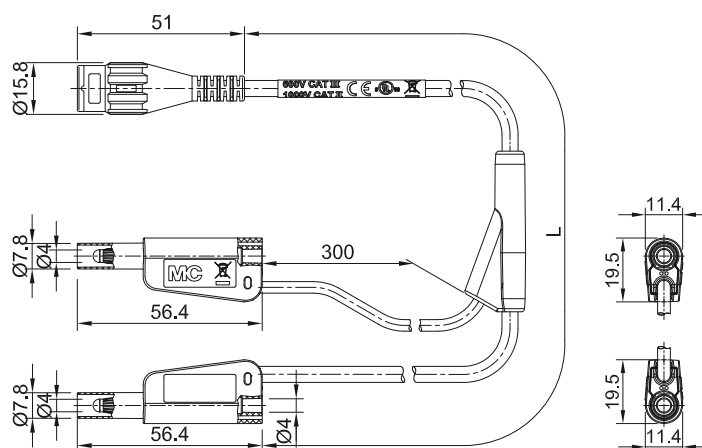

Order No.	Type	Rated voltage	Lead		Lead lengths L [cm]
66.1030-□	XLAM-SLK-4N-RG58	1000 V, CAT II 600 V, CAT III	PVC RG58	Au Ni CE UK CA c UL US	100 160
66.1031-□	XLAM-SLK-4N-SILI-SC05	1000 V, CAT II 600 V, CAT III	SIL SILI-SC 0,5/1,0	Au Ni CE UK CA c UL US	100 160

Technical Data		
	XLAM-SLK-4N-RG58	XLAM-SLK-4N-SILI-SC05
Rated voltage	1000 V, CAT II (600 V, CAT III)	1000 V, CAT II (600 V, CAT III)
Capacity (f = 100 kHz)	100 pF (L = 100 cm) 160 pF (L = 160 cm)	150 pF (L = 100 cm) 240 pF (L = 160 cm)
Inductance (f = 100 kHz)	750 nH (L = 100 cm) 1000 nH (L = 160 cm)	750 nH (L = 100 cm) 1000 nH (L = 160 cm)
Coaxial lead (Type)/Insulation	RG58/PVC	SILI-SC 0,5/1,0/Silicon
Temperature range	-10°C...+70°C	-50°C...+150°C