

Miniature Fuse, 6.3 x 32 mm, Quick-Acting F, NNO, 220 VAC



220 VAC · Quick-Acting F



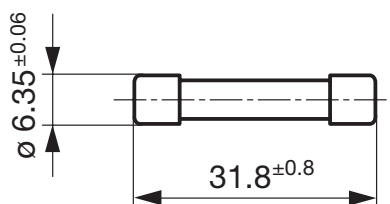
NNO

Description

- Low Breaking Capacity

References[General Product Information](#)**Weblinks**[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)**Technical Data**

Rated Voltage	125 - 220 VAC
Rated Current	0.04 - 20 A
Breaking Capacity	100 A - 500 A
Characteristic	Quick-Acting F
Mounting	Fuseholder / Clip
Admissible Ambient Air Temp.	-40 °C to 85 °C
Climatic Category	40/085/56 acc. to IEC 60068-1
Material: Tube	Glass
Unit Weight	1.5 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	Current Rating

DimensionsLength  32 mm**Pre-Arcing Time**

Rated Current I_n	$1.1 \times I_n$ min.	$1.7 \times I_n$ max.
0.04 A - 20 A	60 min	60 min

[Distributor-Stock-Check](#) | [SCHURTER-Stock-Check](#) | [e-Store](#)

Variants

Rated Cur- rent [A]	Rated Vol- tage [VAC]	Breaking Capacity	Voltage Drop 1.0 In typ. [mV]	NNO	Order Number
0.04	220	1)	3800	●	7015.1130
0.05	220	1)	3100	●	7015.1140
0.063	220	1)	4800	●	7015.1150
0.08	220	1)	2860	●	7015.1160
0.1	220	1)	2400	●	7015.1210
0.125	220	1)	2300	●	7015.1220
0.16	220	1)	2500	●	7015.1230
0.2	220	1)	1750	●	7015.1240
0.25	220	1)	2200	●	7015.1250
0.31	220	1)	3200	●	7015.1270
0.4	220	1)	2370	●	7015.1280
0.5	220	1)	2370	●	7015.1290
0.63	220	1)	2050	●	7015.1320
0.8	220	1)	490	●	7015.1340
1	220	1)	820	●	7015.1350
1.25	220	1)	660	●	7015.1410
1.6	220	1)	710	●	7015.1430
2	220	2)	600	●	7015.1440
2.5	220	2)	350	●	7015.1450
3.15	220	2)	320	●	7015.1470
4	220	2)	420	●	7015.1480
5	220	2)	270	●	7015.1490
6.3	220	2)	210	●	7015.1520
8	125	-	190	●	7015.1540
10	125	-	90	●	7015.1550
12.5	125	-	80	●	7015.1610
16	125	-	80	●	7015.1620
20	125	-	90	●	7015.1660

1) 500 A @ 220 VAC , p.f. ≥ 0.9

2) 100 A @ 220 VAC , p.f. ≥ 0.9

Packaging Unit

Small Box Pack (10 pcs.)

Time-Current Curves

