

MATERIALS AND FINISHES

BODY: ZINC ALLOY
PLATED NICKEL




CONTACT: PHOSPHOR BRONZE
PLATED GOLD

INSULATOR: POLYPROPYLENE (94 V-2)

MOUNTING POST: BRASS
PLATED TIN




JAM NUT: BRASS
PLATED NICKEL

SOLDER TAIL: COPPER COVERED STEEL
PLATED TIN

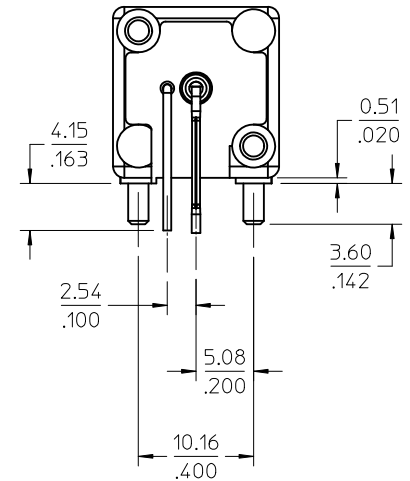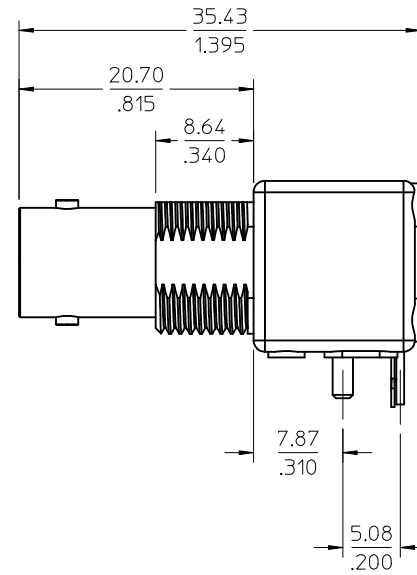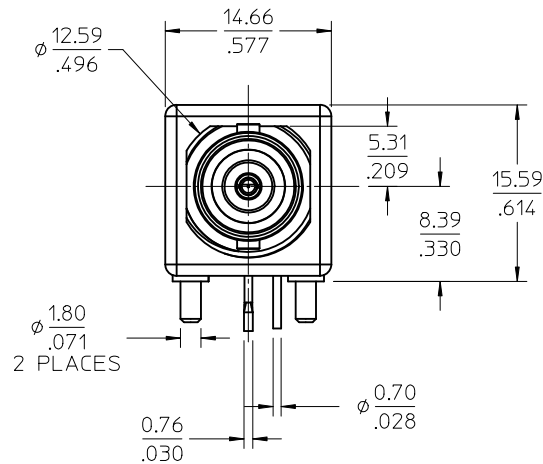

73171-4360	INCLUDED	QTY (1) OF 73138-5033 IN SINGLE BAG WITH LABEL
73171-3720	NOT INCLUDED	BULK (TRAY)
73138-5033	INCLUDED	BULK (TRAY)
PART NO.	HARDWARE	PACKAGING

PANEL CUT-OUT
THICKNESS: 5.5/.216 MAX
MOUNTING TORQUE: 17 IN-LBS MAX

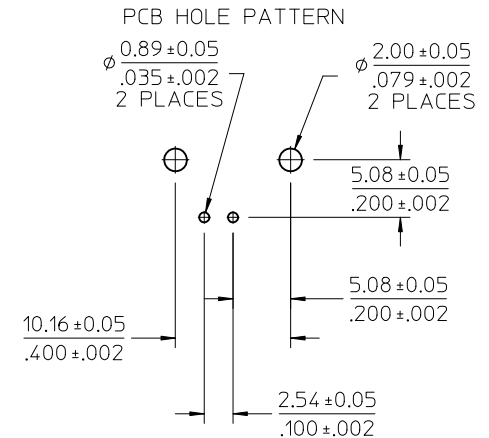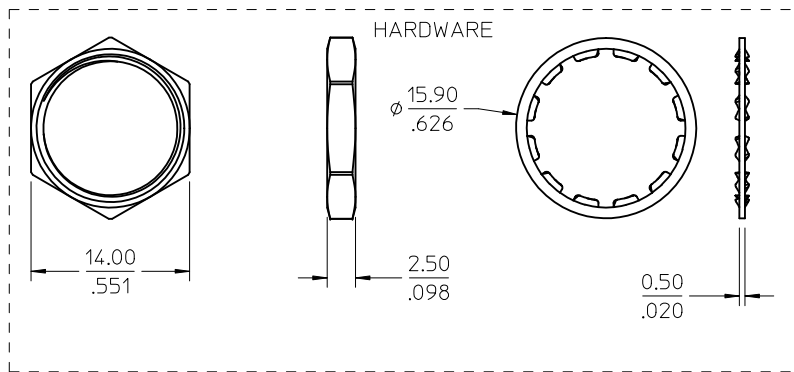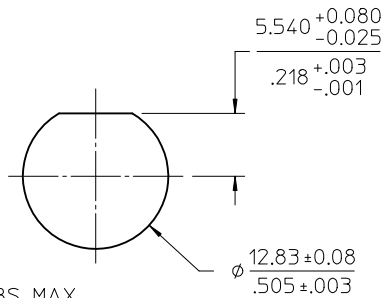

PS-89675-1030	ELEC/MECH PERFORMANCE
SPECIFICATION	DESCRIPTION

CHG: ADD 73171-4360
AND LABEL

EC NO: URF2012-0448
2012/01/25
DRWN: BOMALLEY
2012/02/01
CHKD: AZR
2012/02/06
APPR: JWIENER

QUALITY
SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES
(UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± .005	± .0002
3 PLACES	± .005	± .0002
2 PLACES	± .005	± .0002
1 PLACE	± .005	± .0002

ANGULAR ± 2 °

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM/IN

DRAWN BY	DATE
IRIS WANG	1991/02/26
CHECKED BY	DATE
IRIS WANG	1991/02/26
APPROVED BY	DATE
R FIELDS	1991/02/26

MATERIAL NO.
SEE TABLE

SCALE
DESIGN UNITS
METRIC

THIRD ANGLE
PROJECTION

TITLE
BNC JACK RA BULKHEAD
DIECAST 50 OHM
BNC-J/PCB

MOLEX INCORPORATED

DOCUMENT NO.
SD-73138-5033

SHEET NO.
1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION