



GFK EX

Matières **raccord :** PA, renforcé fibre de verre
 joint intérieur : TPE / NBR¹⁾

Coloris : noir = RAL 9005

Températures d'utilisation : -20 à +85°C

Norme d'essai : EN 60079-0 / EN 60079-7

Ex e II




IP 68



Référence article		Ø		H	L
	G	mm	mm	mm	mm

Joint court en une partie

AEX1540.17.060	M16x1,5	4,5 - 6,0	21	26	12
AEX1540.17.080	M16x1,5	6,0 - 8,0	21	26	12
AEX1540.20.080	M20x1,5	6,0 - 8,0	27	28	13
AEX1540.20.110	M20x1,5	8,0 - 11,0	27	28	13
AEX1540.25.125	M25x1,5	9,5 - 12,5	34	33	13
AEX1540.25.160	M25x1,5	12,5 - 16,0	34	33	13
AEX1540.25.190	M25x1,5	16,0 - 19,0	34	33	13
AEX1540.25.205	M25x1,5	19,0 - 20,5	34	33	13
AEX1540.32.210	M32x1,5	20,0 - 21,0	41	35	15
AEX1540.32.220 ¹⁾	M32x1,5	21,0 - 22,0	41	35	15
AEX1540.32.230 ¹⁾	M32x1,5	22,0 - 23,0	41	35	15
AEX1540.32.255	M32x1,5	23,0 - 25,5	41	35	15
AEX1540.40.270 ¹⁾	M40x1,5	25,5 - 27,0	50	40	15
AEX1540.40.285	M40x1,5	27,0 - 28,5	50	40	15
AEX1540.40.300 ¹⁾	M40x1,5	28,5 - 30,0	50	40	15
AEX1540.40.330	M40x1,5	30,0 - 33,0	50	40	15
AEX1540.50.350 ¹⁾	M50x1,5	33,0 - 35,0	60	42	16
AEX1540.50.370	M50x1,5	35,0 - 37,0	60	42	16
AEX1540.50.390 ¹⁾	M50x1,5	37,0 - 39,0	60	42	16
AEX1540.50.420	M50x1,5	39,0 - 42,0	60	42	16
AEX1540.63.440 ¹⁾	M63x1,5	42,0 - 44,0	75	48	16
AEX1540.63.460	M63x1,5	44,0 - 46,0	75	48	16
AEX1540.63.480 ¹⁾	M63x1,5	46,0 - 48,0	75	48	16
AEX1540.63.520	M63x1,5	48,0 - 52,0	75	48	16

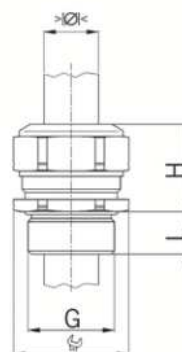

Les presse-étoupe en polyamide bleu, pour zones intrinsèques Ex i se trouvent en pages A-A 4.27 et A-A 4.28