



reference

2J030

frequency

**AMPS / GSM900 / GSM1800
UMTS2100 / Bluetooth2400**

vswr

<2:1

impedance

50 Ohms

polarisation

vertical

gain

2.2 dBi Max

connector


FME Female

working temperature


-40°C to +85°C

size

61mm x 6,7 - 9,65mm

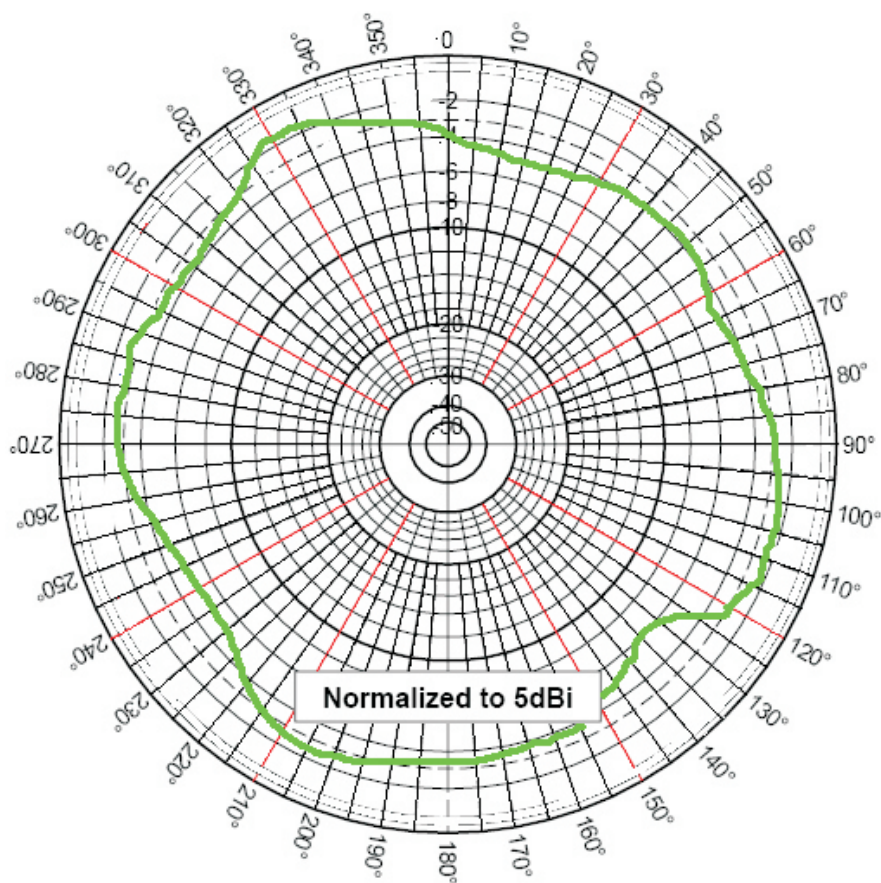

Azimuthal Pattern (X, Y or E-Plane)

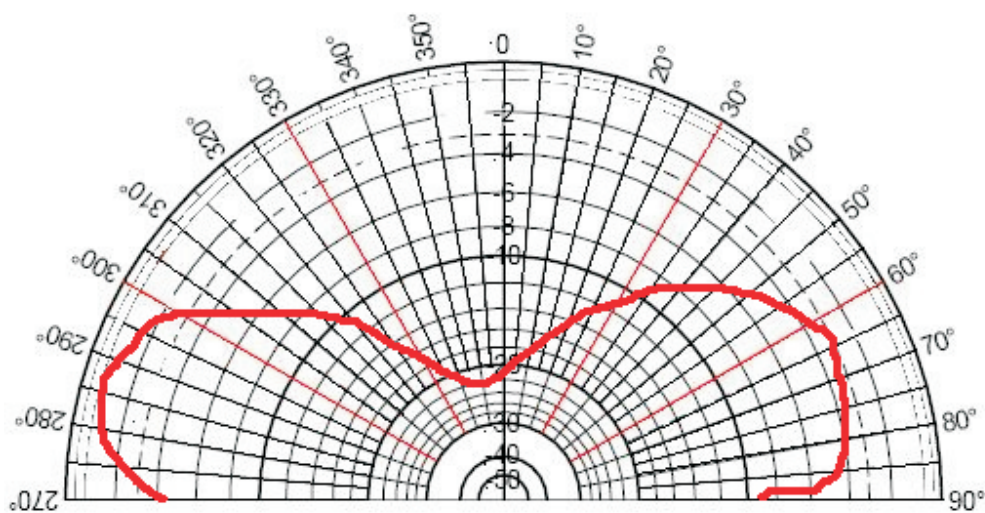

Elevation Pattern (Z, Y or H-Plane)

VSWR

