

Inductors

RF chokes, HLBC series

Series/Type: B82145A

Date: June 2012

© EPCOS AG 2015. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

EPCOS AG is a TDK Group Company.



HLBC series, 6.5 x 12 (mm)

HLBC choke (High-Current Large Bobbin Core)
Rated inductance 100 ... 10 000 μH
Rated current 110 ... 860 mA

Construction

- Large ferrite drum core
- Winding: enamel copper wire
- Flame-retardant lacquer coating

Features

- High rated current at high inductance ratings
- Radial leads in bulk on request (B82145C)
- Suitable for wave soldering
- RoHS-compatible

Applications

- Decoupling
- Interference suppression
- For energy-saving lamps and entertainment electronics

Terminals

- Central axial leads (B82145A)
- Radially bent to 5mm lead spacing (B82145C)
- Base material CuAg0.1
- Electroplated with nickel and pure tin

Marking

Inductance indicated by color bands to IEC 60062


Delivery mode and packing unit

Taped and reeled

Packing unit: 1250 pcs./reel

Bulk packaging for radially bent


Packing unit: 200 pcs./polyethylene bag

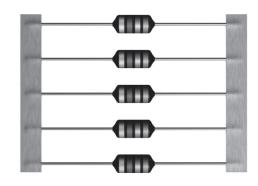




HLBC series, 6.5 x 12 (mm)

Dimensional drawing

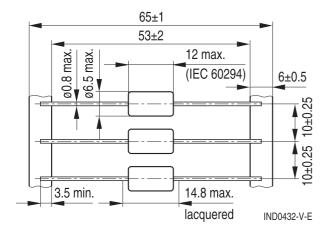

Dimensions in mm Minimum lead spacing 15 mm

Packing

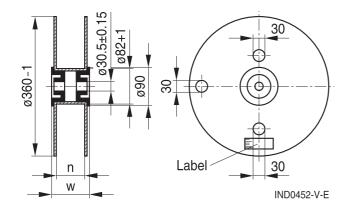

Dimensions in mm

n (mm): 72 +1 w (mm): 84 max



HLBC series, 6.5 x 12 (mm)

Technical data and measuring conditions

Rated inductance L _R	Measured with LCR meter Agilent 4284A or impedance analyzer Agilent 4294A					
	Measuring frequency: $100 \mu H < L_R \le 4700 \mu H = 100 kHz$ $L_R > 4700 \mu H$ = 10 kHz					
	Measuring current: ≤ 1 mA Measuring temperature: +20 °C					
Q factor Q _{min}	Measured with precision impedance analyzer Agilent 4294A, +20 °C					
Rated temperature T _R	+40 °C					
Rated current I _R	Maximum permissible DC current at rated temperature					
Inductance decrease ∆L/L ₀	≤ 10% (referred to initial value) at I _R , +20 °C					
DC resistance R _{max}	Measured at +20 °C					
Resonance frequency f _{res,min}	Measured with Agilent 4294A or 8753ES, +20 °C					
Solderability (lead-free)	Sn95.5Ag3.8Cu0.7: $+(245 \pm 5)$ °C, (3 ± 0.3) s Wetting of soldering area $\geq 90\%$ (to IEC 60068-2-20, test Ta)					
Resistance to soldering heat	+(260 ±5) °C, 10 s (to IEC 60068-2-20, test Tb)					
Tensile strength of leads	≥ 20 N (to IEC 60068-2-21, test Ua)					
Climatic category	55/125/56 (to IEC 60068-1)					
Storage conditions	Mounted: -55 °C +125 °C Packaged: -25 °C +40 °C, ≤ 75% RH					
Weight	Approx. 1.3 g					



▲ Mounting information

When bending the leads, take care that the start-of-winding areas at the face ends (protected by glue and lacquer) are not subjected to any mechanical stress.



HLBC series, 6.5 x 12 (mm)

Characteristics and ordering codes

L _R	Tolerance ¹⁾	Q _{min}	f _Q	I _R	R _{max}	f _{res,min}	Ordering code
μΗ			MHz	mA	Ω	MHz	
100	±5% ≙ J	50	0.796	860	0.70	3.5	B82145A1104J000
150		40	0.796	770	0.90	3.0	B82145A1154J000
220		30	0.796	690	1.10	2.5	B82145A1224J000
330		30	0.796	630	1.30	2.1	B82145A1334J000
470		30	0.796	510	1.90	1.8	B82145A1474J000
680		20	0.796	440	2.50	1.5	B82145A1684J000
1000		60	0.252	370	3.60	1.3	B82145A1105J000
1500		60	0.252	300	5.40	1.0	B82145A1155J000
2200		60	0.252	250	8.00	0.8	B82145A1225J000
3300		60	0.252	200	12.5	0.6	B82145A1335J000
4700		60	0.252	170	18.0	0.5	B82145A1475J000
6800		60	0.252	130	28.5	0.4	B82145A1685J000
10000		50	0.0796	110	35.0	0.35	B82145A1106J000

HLBC chokes with diameter 7.5 and 8.5 mm for even higher rated currents available on request. HLBC chokes with temperature range up to +140 °C available on request.


¹⁾ Closer tolerances on request.




HLBC series, 6.5 x 12 (mm)

Impedance |Z| versus frequency f


measured with impedance analyzer Agilent 4294A or S-parameter network analyzer Agilent 8753ES, typical values at +20 °C

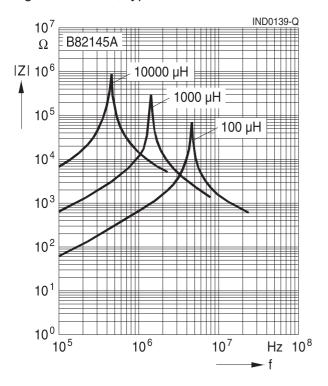

Q factor versus frequency f measured with impedance analyzer

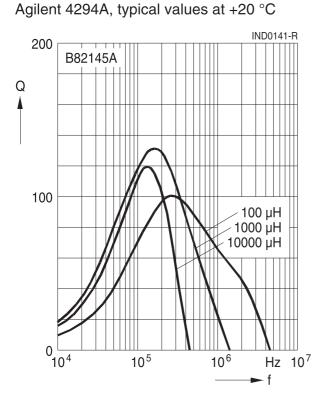

Inductance L versus DC load current I_{DC} measured with LCR meter Agilent 4284A, typical values at +20 °C

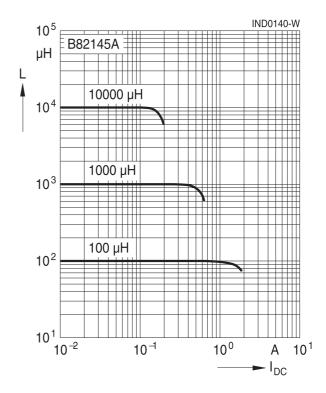

Current derating I_{op}/I_R versus ambient temperature T_A (rated temperature $T_R = +40 \, ^{\circ}C$)

