
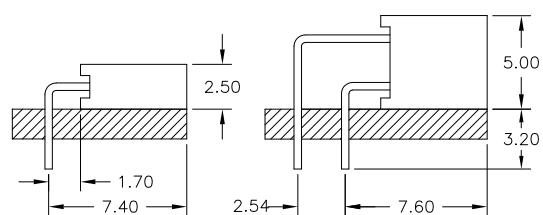

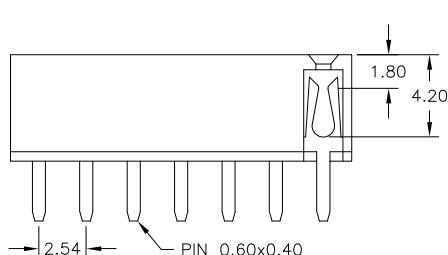

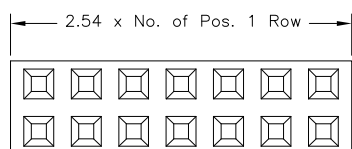
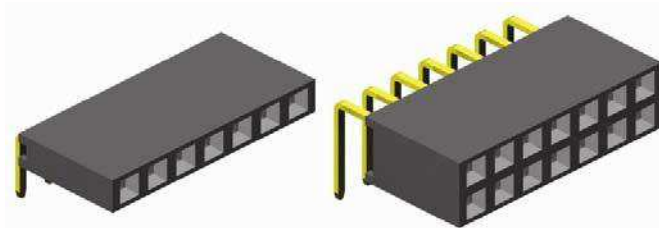


2.54mm pitch Female Header
- THT - 5.70mm profile

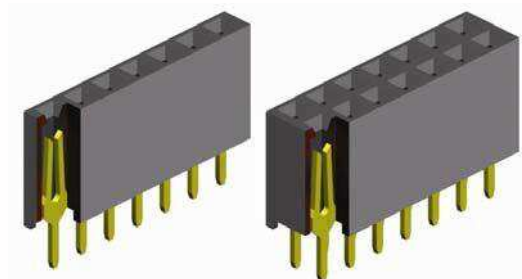


S 570

R 570

SPECIFICATIONS

Current rating	3 A
Insulator resistance	1000 MΩ min.
Contact resistance	20 mΩ max.
Withstanding voltage	500 V AC
Operating temperature	- 40°C to +105°C
Contact material	(RoHS compliant) Brass
Insulator material	(RoHS compliant) P.B.T. UL 94 V-0

PCB Hole Layout

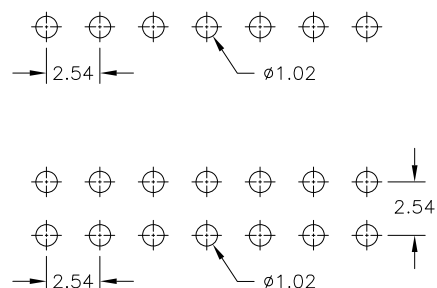

How to order

BL x - xxx - X 570 - 55

Rows	
1	= single row
2	= dual row

Nbr of contacts	
single row	= 002 to 040
dual row	= 004 to 080

Connector style	
S 570	= straight
R 570	= right angle

Plating	
55	= gold
Other platings on request	