

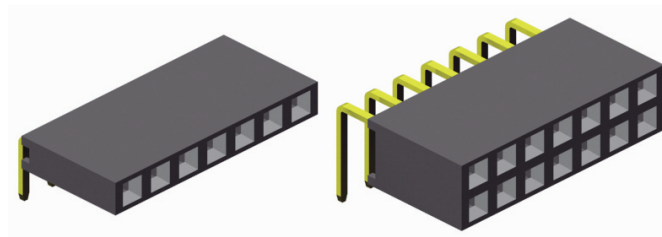
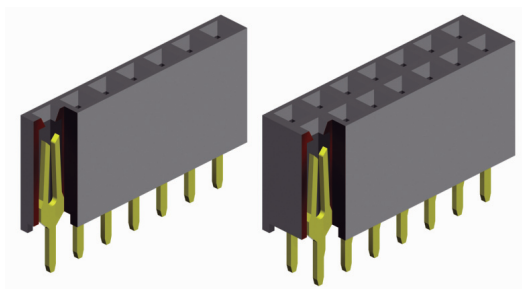
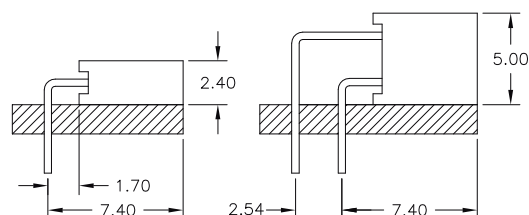



2.54mm pitch Female Header

- THT - 5.70mm profile

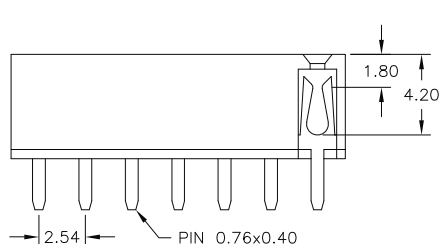

$0.50 + (2.54 \times \text{No. of Pos. 1 Row})$




S 570

R 570

SPECIFICATIONS

Current rating	3 A
Insulator resistance	1000 MΩ min.
Contact resistance	20 mΩ max.
Withstanding voltage	500 V AC
Operating temperature	- 40°C to +105°C
Contact material (RoHS compliant)	Phosphor Bronze
Insulator material (RoHS compliant)	P.B.T. UL 94 V-0

PCB Hole Layout

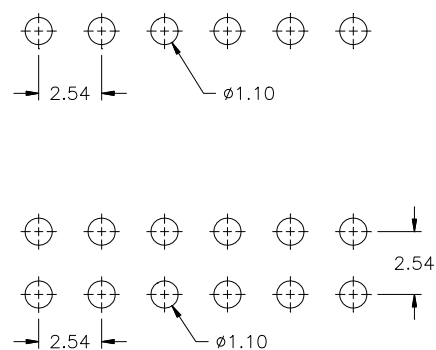

How to order

BL x - xxx - X 570 - 55

Rows

1 = single row
2 = dual row

Nbr of contacts

single row = **002** to **040**
dual row = **004** to **080**

Connector style

S 570 = straight
R 570 = right angle

Plating

55 = gold
Other platings on request