

RECTIFIERS

High Efficiency, 7A and 8A

UES1401 BYW29-50 BYW80-50
 UES1402 BYW29-100 BYW80-100
 UES1403 BYW29-150 BYW80-150
 UES1404 BYW29-200 BYW80-200

2

FEATURES

- Very Low Forward Voltage
- Very Fast Recovery Times
- Economical, Convenient Plastic Package
- Low Thermal Resistance
- Mechanically Rugged

DESCRIPTION

The UES1400/BYW29/BYW80 Series, in a plastic package similar to the TO-220, is specifically designed for operation in power switching circuits to frequencies in excess of 100KHz. The very low forward voltage and very fast recovery time make them particularly suited for switching type power supplies.

ABSOLUTE MAXIMUM RATINGS

	UES1401	UES1402	UES1403	UES1404
Peak Inverse Voltage, V_R	50V	100V	150V	200V
Repetitive Peak Inverse Voltage, V_{RWM}	50V	100V	150V	200V
Non-Repetitive Peak Inverse Voltage, V_{RSM}	50V	100V	150V	200V
Maximum Average D.C. Output Current, I_o				
@ $T_C = 125^\circ\text{C}$, (Note 1)	8.0A			
@ $T_A = 25^\circ\text{C}$	3.0A			
@ $T_A = 25^\circ\text{C}$, (Note 2)	8.0A			
Non-Repetitive Sinusoidal Surge Current at 8.3 ms, I_{FSM}	80A			
Thermal Resistance, Junction to Case, $R_{\theta JC}$	2.5°C/W			
Thermal Resistance, Junction to Ambient, $R_{\theta JA}$	60°C/W			
Storage Temperature Range, T_{STG}	-55°C to +150°C			
Maximum Operating Junction Temperature, T_{JMAX}	+150°C			



Note 1. Above 100°C use the tab for electrical connection.

Note 2. Using Wakefield Type 295 heatsink with convection cooling. For more definitive data refer to the Output Current vs. Temperature Curves on this datasheet.

	BYW29-50	BYW29-100	BYW29-150	BYW29-200	BYW80-50	BYW80-100	BYW80-150	BYW80-200
Peak Inverse Voltage, V_R	50V	100V	150V	200V	50V	100V	150V	200V
Repetitive Peak Inverse Voltage, V_{RWM}	50V	100V	150V	200V	50V	100V	150V	200V
Non-Repetitive Peak Inverse Voltage, V_{RSM}	50V	100V	150V	200V	50V	100V	150V	200V
Maximum Average D.C. Output Current								
@ $T_C = 125^\circ\text{C}$, (Note 1)	7.0A				7.0A			
Non-Repetitive Sinusoidal Surge Current at 8.3ms	80A				100A			
Thermal Resistance, Junction to Case, $R_{\theta JC}$	2.5°C/W				60°C/W			
Thermal Resistance, Junction to Ambient, $R_{\theta JA}$	60°C/W							
Operating and Storage Temperature Range	-55°C to +150°C							
Maximum Operating Junction Temperature, T_{JMAX}	+150°C							

Note 1. Above 100°C use the tab for electrical connection.

MECHANICAL SPECIFICATIONS

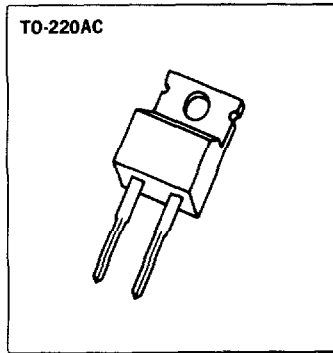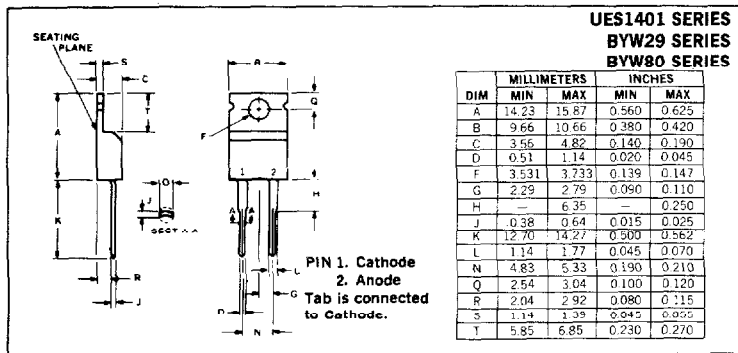





Microsemi Corp.
Watertown
 The diode experts

UES1401	BYW29-50	BYW80-50
UES1402	BYW29-100	BYW80-100
UES1403	BYW29-150	BYW80-150
UES1404	BYW29-200	BYW80-200

ELECTRICAL SPECIFICATIONS


Type	Maximum Reverse Voltage V _R	Maximum Forward Voltage, V _F		Maximum Reverse Current, I _R @ rated V _R		Maximum Reverse Recovery Time T _{rr}	Typical Forward Recovery Voltage @ 1A T _R = 8nS	Typical Forward Recovery Charge Q _{RR} @ 25°
		T _J = 25°C	T _J = 100°C	T _J = 25°C	T _J = 100°C			
UES1401	50V	0.9V @ 4A	0.8V @ 4A	5μA	150μA	35nS ¹	1.4V	—
UES1402	100V	0.975V @ 8A	0.895V @ 8A		150μA			
UES1403	150V	tp = 300μS			150μA			
UES1404	200V				500μA			
BYW29-50	50V	1.300V	0.850V		600μA	35nS ²	1.4V	
BYW29-100	100V	@	@					
BYW29-150	150V	20A	5A					
BYW29-200	200V							
BYW80-50	50V	1.25V	0.850V	10μA	1mA	35nS ²	—	15nC ³
BYW80-100	100V	@	@					
BYW80-150	150V	22A	7A					
BYW80-200	200V							

NOTES: 1. Measured in circuit $I_F = 0.5A$, $I_R = 1.0A$, $I_{REC} = 0.25A$
2. Measured in circuit $I_F = 1A$ to $V_R \geq 30V$, $dI_F/dt = 50A/\mu S$
3. Measured in circuit $I_F = 2A$, $V_R \leq 30V$, $dI_F/dt = -20A/\mu S$

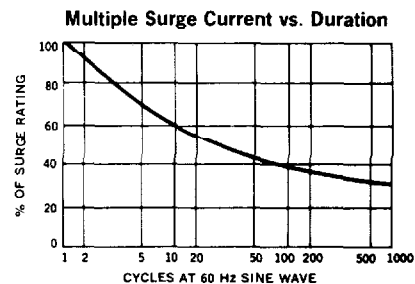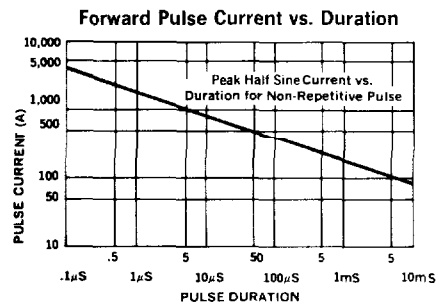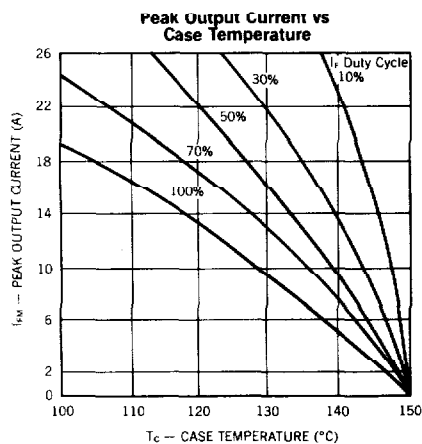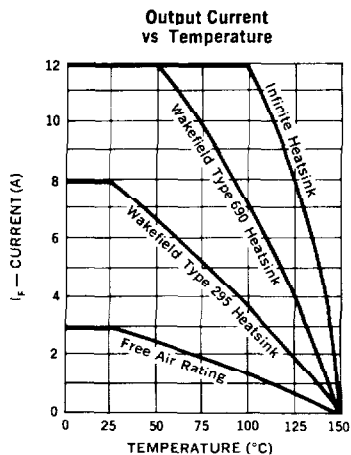


UES1401	BYW29-50	BYW80-50
UES1402	BYW29-100	BYW80-100
UES1403	BYW29-150	BYW80-150
UES1404	BYW29-200	BYW80-200


Typical Forward Current
vs Forward Voltage

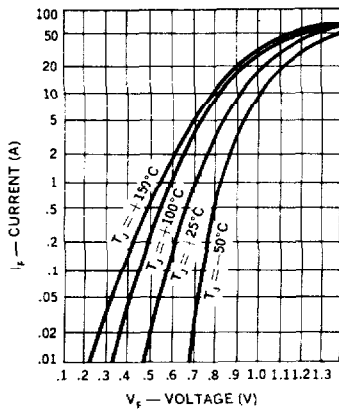


Typical Reverse Current
vs Voltage

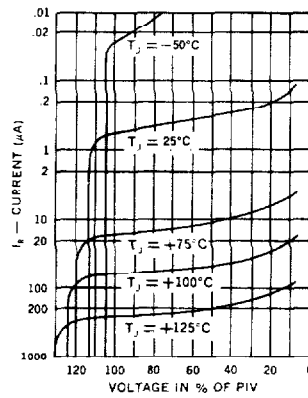

Thermal Impedance
vs Pulse Width

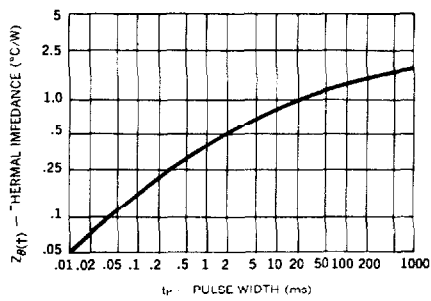

Reverse-Recovery Circuit

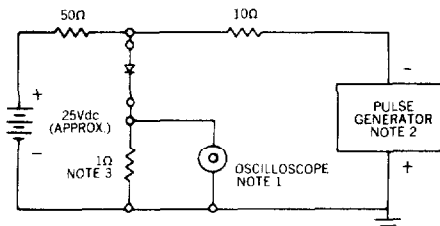

NOTES:

1. Oscilloscope: Rise time ≤ 3 ns, input impedance = 50Ω.
2. Pulse Generator: Rise time ≤ 8 ns, source impedance 10Ω.
3. Current viewing resistor, non inductive, coaxial recommended.

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.