

C3216X5R1H335K160AB

TDK Item Description : C3216X5R1H335KT****




Application & Main Feature


Commercial Grade (General (Up to 50V))

Series

C3216 [EIA CC1206]



DC Bias Characteristic

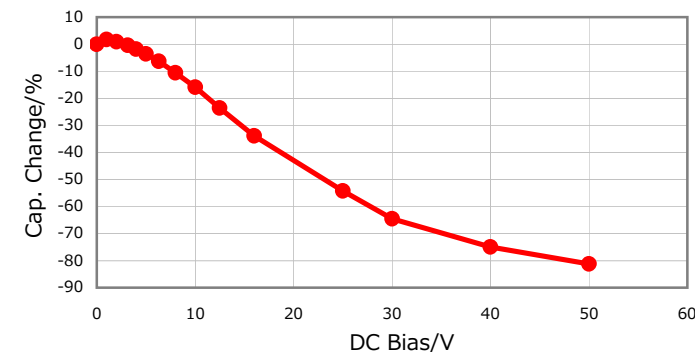

Dimensions

L 3.20mm +/-0.2mm
W 1.60mm +/-0.2mm
T 1.60mm +/-0.2mm
B 0.20mm Min.
G 1.00mm Min.

Temperature Characteristic

X5R (-55 to 85 degC +/-15%)

Rated Voltage

1H (50Vdc)

Capacitance

3.3uF

Capacitance Tolerance

K (+/-10%)

Dissipation Factor

5% Max.


Insulation Resistance

151Mohm Min.


AEC-Q200

Not Applicable


|Z|, ESR vs. Freq. Characteristics

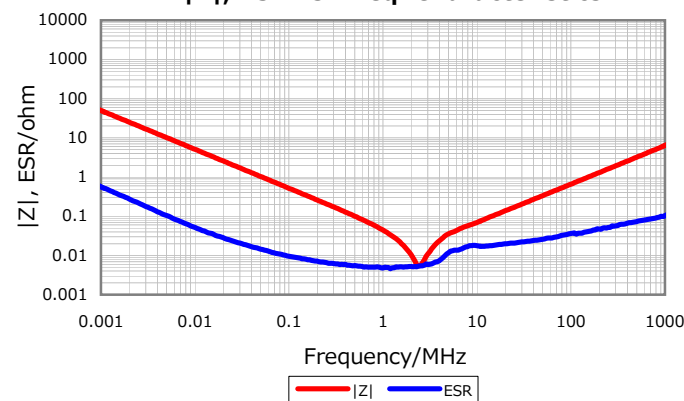


Temperature Characteristic

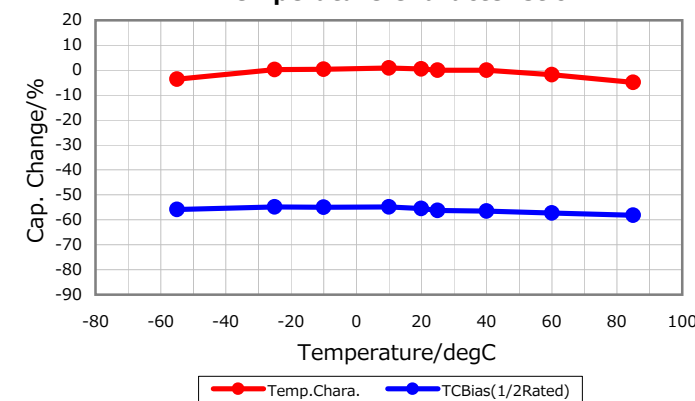

Cap. vs. Freq. Characteristic

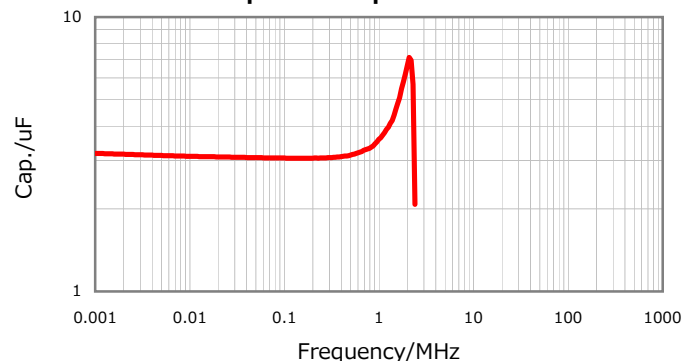

Ripple Temperature Rise Characteristic

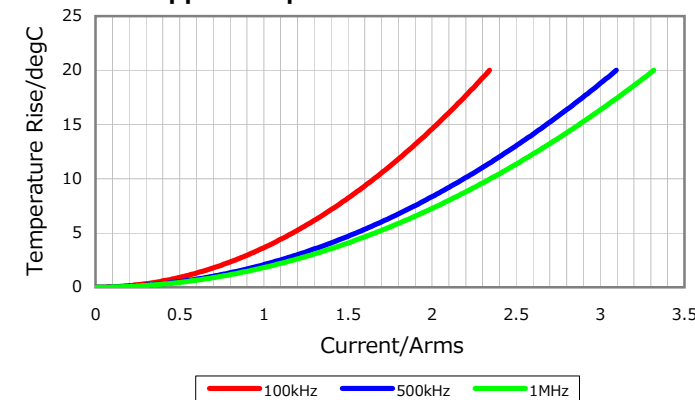

All specifications are subject to change without notice.

September 28, 2013