

C3225X7S2A335K200AB

TDK Item Description : C3225X7S2A335KT****



Application & Main Feature

Commercial Grade (Mid Voltage (100 to 630V))

Series

C3225 [EIA CC1210]

Dimensions

L 3.20mm +/-0.4mm
W 2.50mm +/-0.3mm
T 2.00mm +/-0.2mm
B 0.20mm Min.
G

Temperature Characteristic

X7S (-55 to 125 degC +/-22%)

Rated Voltage

2A (100Vdc)

Capacitance

3.3uF

Capacitance Tolerance

K (+/-10%)

Dissipation Factor


5% Max.

Insulation Resistance


151Mohm Min.

AEC-Q200


Not Applicable




DC Bias Characteristic

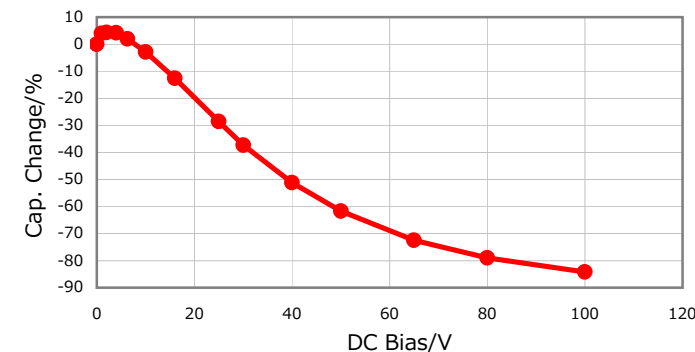


|Z|, ESR vs. Freq. Characteristics

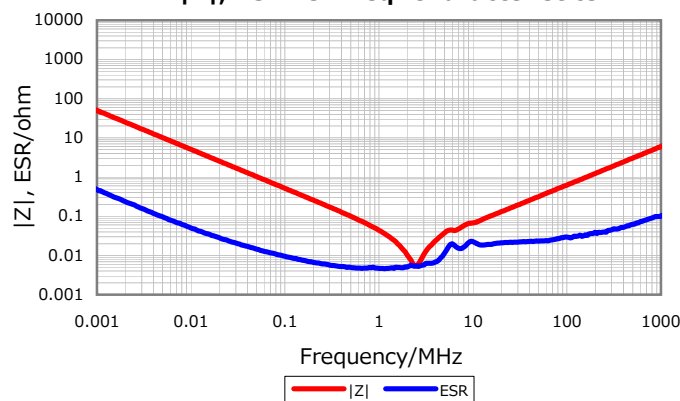


Temperature Characteristic

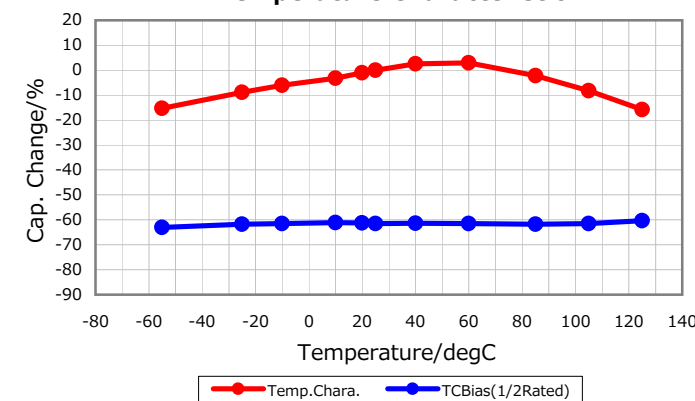

Cap. vs. Freq. Characteristic

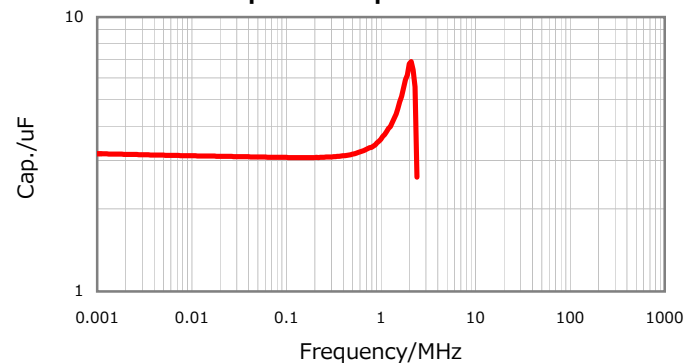

Ripple Temperature Rise Characteristic

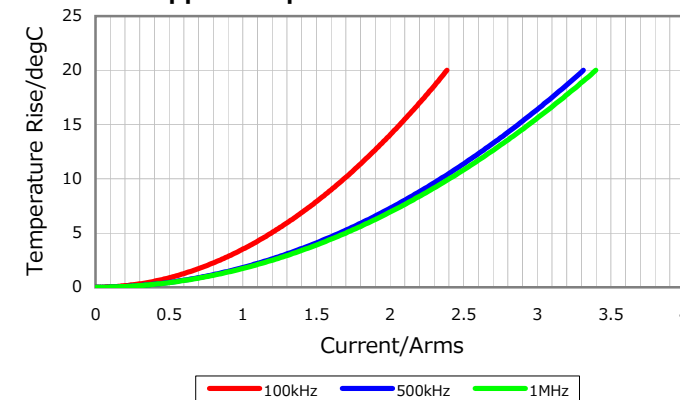

All specifications are subject to change without notice.

September 28, 2013