

EAO – Your Expert Partner for Human Machine Interfaces

82-6551.1123 - Illuminated pushbutton 22 mm Aluminium, momentary

**82-6551.1123 - Illuminated pushbutton 22 mm
Aluminium, momentary 12V Blue LED**



Mounting

Design	flush
Mounting cut-out	Ø 22 mm

Front

Front shape	round
Front ring shape	flush
Front dimension	Ø 25 mm
Front bezel material	Aluminium

Other Attributes

Operating voltage	12 V AC/DC
Weight	0.018 kg
Operation current	14 mA

Operating-/Indication part

Lens optics	opaque
Lens material	Aluminium
Lens profile	flat
Lens illumination	illuminative
Lens colour	natural anodized

IP-Rating

Front protection	IP 67 / IK10
------------------	--------------

Connection Method

Terminal	Solder 2.8 x 0.5 mm
----------	---------------------

Actuator

Switching action	Momentary
------------------	-----------

Switching element

Switching current	5 A Max. Thermal Ith2
Contact material	Silver
Contacts	1 C
Switching system	Snap-action switching element
Switching voltage	250 V AC
Typical switch rating	1A @24V, 0.5A @230VAC

Illumination

Illumination	Ring with blue LED
--------------	--------------------


Function

Illuminated pushbutton


EAO – Your Expert Partner for Human Machine Interfaces

82-6551.1123 - Illuminated pushbutton 22 mm Aluminium, momentary


Dimensions




Mounting cut-outs



Wiring diagram



Component layout



Legend

Switching action: B = Momentary

Contacts: C = Changeover

Series 82 | Vandal-Resistant Pushbutton



EAO, the expert partner for Human Machine Interfaces, offers a range of attractive, vandal-resistant pushbuttons for applications in harsh environments. With their robust metal housings, these innovatively designed switches are protected to IK10 impact resistance and IP67 sealing requirements which makes them ideal for use in exposed public areas as well as other aggressive environments. The switches are available with momentary or maintained action, and with a choice of central dot or ring illumination.

Main features

- Vandal resistance: Impact resistant to IK10, sealed to IP67 standard
- Long service life: > one million cycles of operation
- Optional illumination with daylight readable LEDs
- Metal housing with attractive design
- Excellent tactile switching action

Typical applications

- Access control, security systems
- Exposed public areas: Ticketing machines, vending machines, public kiosks
- Industrial: Machinery and factory equipment
- Lifting and Moving: Elevators and people movers

Mounting cut-out

Ø 16mm, Ø 19mm, Ø 22mm

Materials

- Stainless steel SUS 304
- Stainless steel chrome coloured
- Brass gold coloured
- Aluminium (natural anodised), other colours on request

Switching system

Switching element Snap-action switching element
Contact arrangement NO/NC (changeover)

Switching action

Momentary or maintained

Contact material

Silver alloy

Mechanical properties

Mechanical lifetime

> 1 million cycles of operation

Actuation force

4 ... 7 N

Terminals

Soldering / plug-in terminals 2.8 x 0.5mm

Screw terminal

Electrical properties

Rated insulation voltage

250 VAC

Conventional thermal current

5 A

Electrical life

> 50 000 cycles (full load)

Service category

AC-15 (cosφ0.3) and DC-13 (according to IEC 60947-5-1)

	24 V	110 V	220 V	240 V
AC	1 A	1 A		0.5 A
DC	0.7 A	0.2 A	0.1 A	

Switching element

Contact resistance

≤ 50 mΩ, according to IEC 60512-2

Isolation resistance

> 1000 MΩ, according to IEC 60512-3

Dielectric strength

1500 VAC, according to IEC 60947-5

Environmental conditions

Storage temperature

–40 °C ... +80 °C

Operating temperature

–30 °C ... +70 °C

Operating humidity

45 % ... 85 % RH (no condensation)

Front protection

IP65, IP67, according to IEC60529

Impact resistance

IK10, according to IEC 62262

Approvals

CE, CB, UL, C UL, CCC


Series 82 | Vandal-Resistant Pushbutton

Dimensions

Side view

Solder/plug-in terminal

Screw terminal

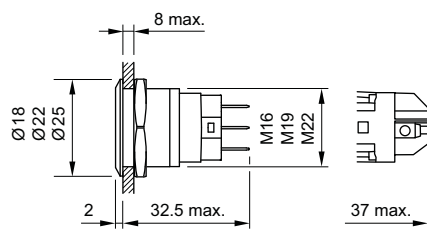


Front view


Non-illuminated

Ring illuminated

Central dot illuminated

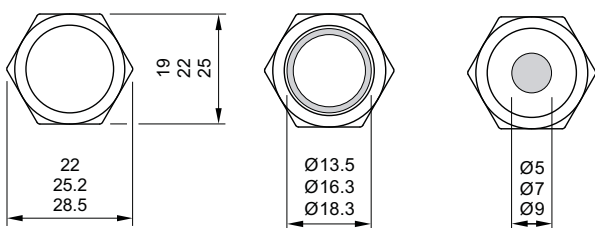

Mounting cut-outs




Wiring diagram

Pushbutton

Illuminated pushbutton

Indicator

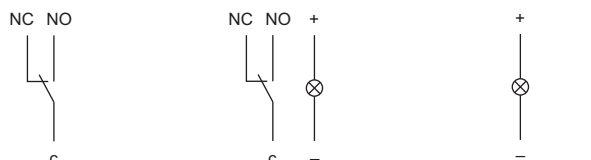


Terminals

Solder/plug-in terminal

Pushbutton

Illuminated pushbutton

Indicator



Screw terminal

Pushbutton

Illuminated pushbutton

Indicator




Bezel profile/Lens profile/Illumination

flush/flat
ring, dot

raised/flat
ring

flush/convex
ring

raised/convex
-

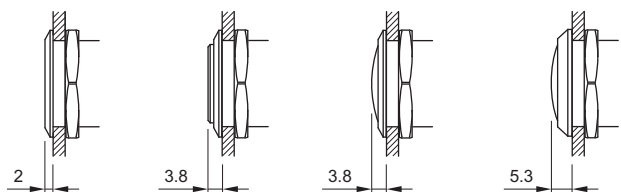

LED illumination

- Red
- Green
- Yellow
- Blue
- White

LED, series resistor and polarity protection are built in.

Voltage	Tolerance	Current	Consumption
6 VAC/DC	±10 %	15 mA	0.1 W
12 VAC/DC	±10 %	14 mA	0.17 W
24 VAC/DC	±10 %	10 mA	0.24 W
110 VAC	±10 %	2 mA	0.22 W
230 VAC	±10 %	1.3 mA	0.29 W