


ENERGIZER XR92 ECO ADVANCED

AAA



Industry Standard Dimensions

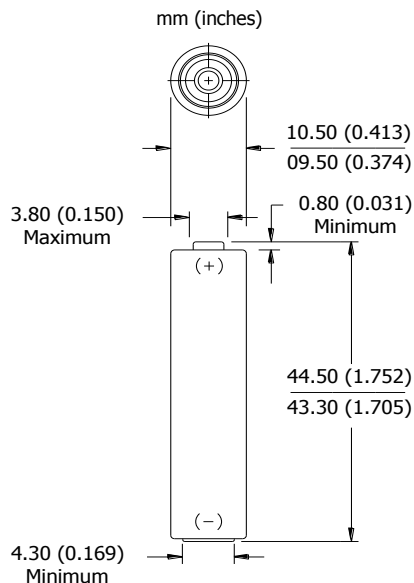


Specifications

Classification:	Alkaline
Chemical System:	Zinc-Manganese Dioxide (Zn/MnO ₂)
	No added mercury or cadmium
Designation:	ANSI-24A, IEC-LR03
Nominal Voltage:	1.5 volts
Nominal IR:	150 to 300 milliohms (fresh)
Operating Temp:	-18°C to 55°C (0°F to 130°F)
Typical Weight:	11.9 grams (0.4 oz.)
Typical Volume:	3.8 cubic centimeters (0.2 cubic inch)
Jacket:	Plastic Label
Shelf Life:	12 years at 21°C
Terminal:	Flat Contact


Milliamp-Hours Capacity

Continuous discharge to 0.8 volts at 21°C

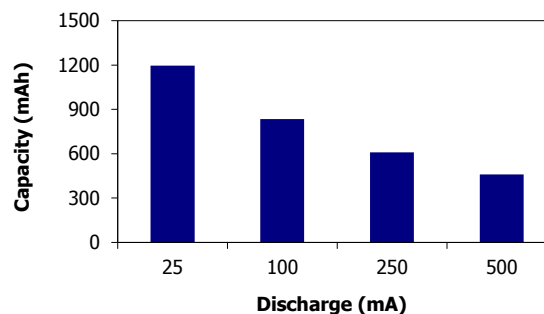


Constant Power Performance

Typical Characteristics (21°C)

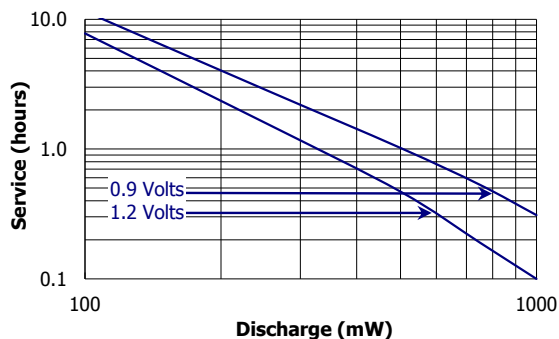

Constant Current Performance

Typical Characteristics (21°C)

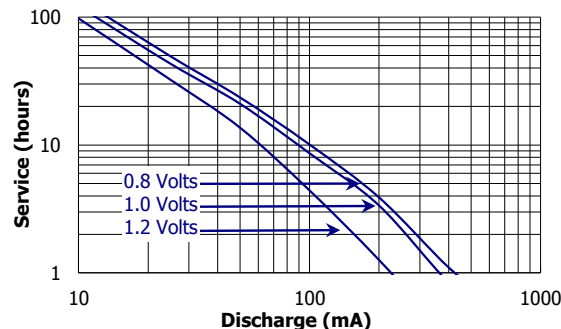

Important Notice

This data sheet contains typical information specific to products manufactured at the time of its publication.

Physical values are for reference purposes and not intended for specific calculations.


©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.

ENERGIZER XR92

AAA


Constant Power Performance

Discharge Characteristics (21°C)

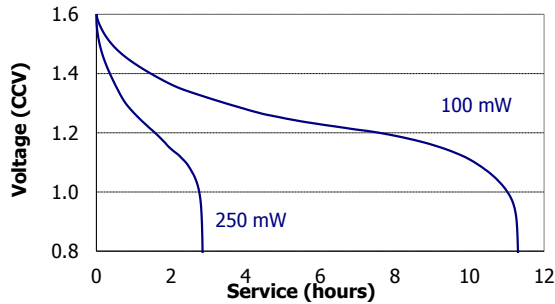


Constant Current Performance

250 mA Discharge (-20°C / 0°C / 21°C)

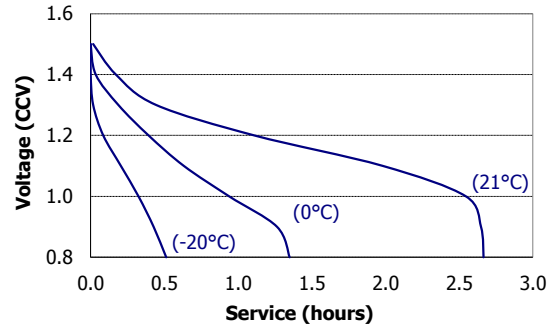


Industry Standard Tests (21°C)


LIGHTING 5.1 ohm LIF

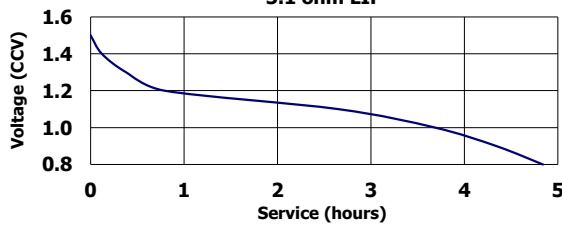


REMOTE 24 ohm 15 sec/min 8 hrs/day

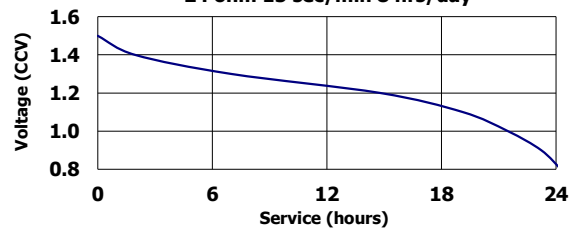

TAPE-GAME-DIGITAL AUDIO 100 mA 1 hr/day

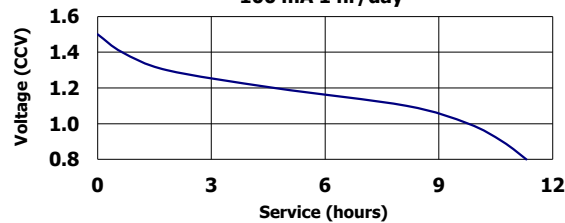

PHOTOFLASH 600 mA 10 sec/min 1 hr/day

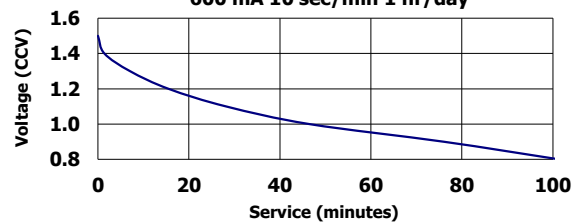

Important Notice

This data sheet contains typical information specific to products manufactured at the time of its publication.
Physical values are for reference purposes and not intended for specific calculations.
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.