
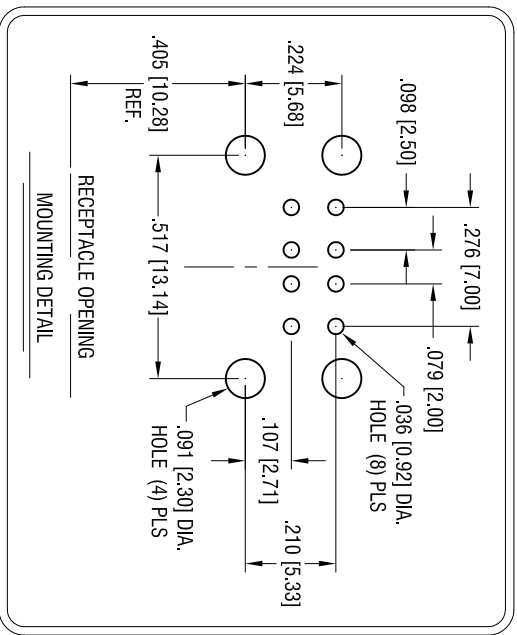
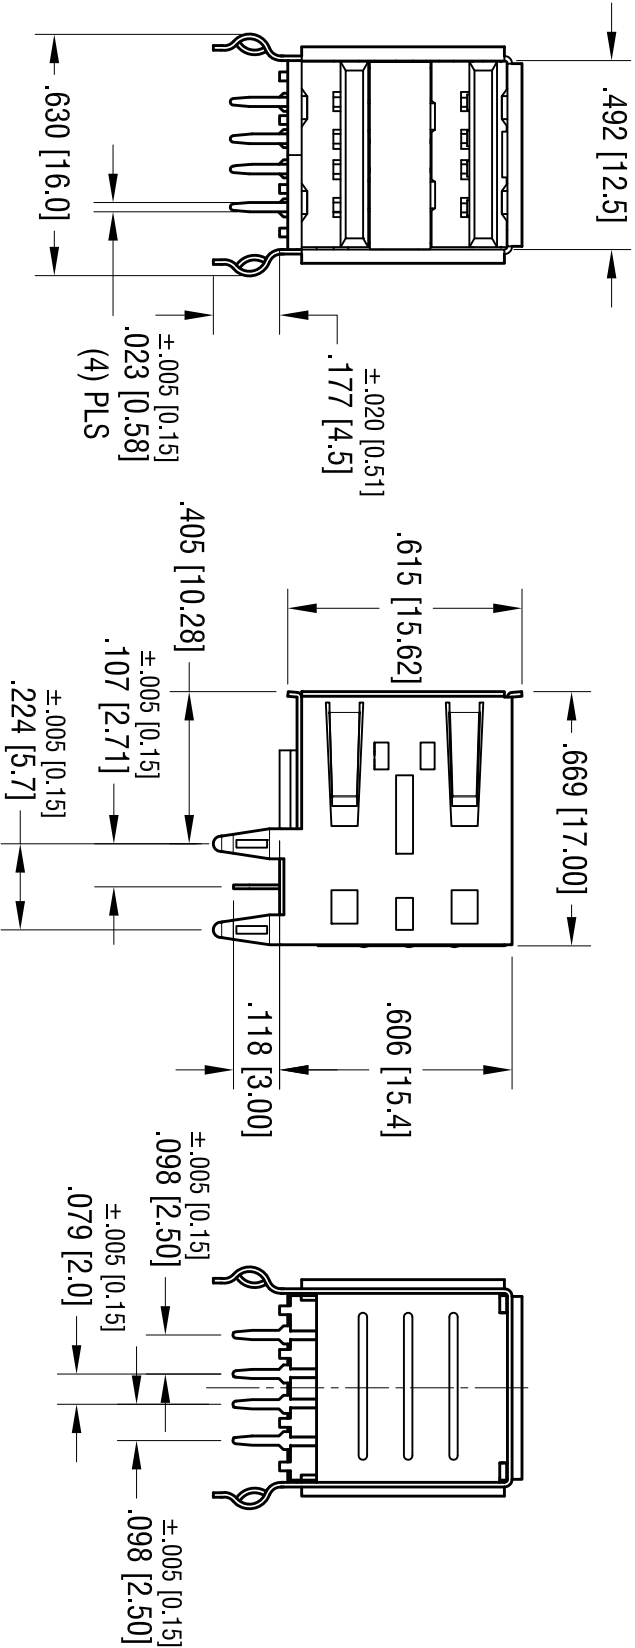



DATE	DESCRIPTION	REV.
8.13.99	CHANGE AS PER ECN 99-057	A
8.08.05	CHANGE AS PER ECN 05-032	B
7.16.08	CHANGE AS PER ECN08-129	C
12.16.09	CHANGE AS PER ECN 09-188	D
12.28.15	CHANGE AS PER ECN 15-149	E

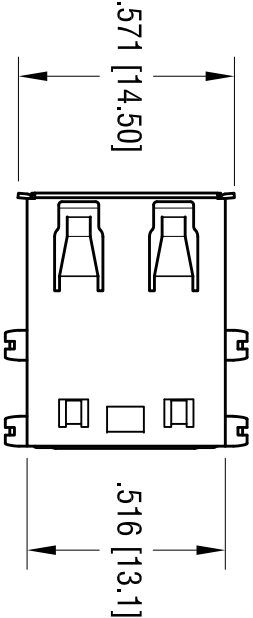

Notes:

- Shell: Mat'l: Steel,
- Finish: Nickel plate, over Copper
- Insulator: Mat'l- Glass Filled LCP
- Contacts: Mat'l: Copper Alloy
- Finish: Contact Area -Gold Plate over Nickel Plate
- Solder Tail - Tin Plate over Nickel Plate

- Electrical Specifications
- Rated Voltage: 30V AC (rms)
- Contact Current Rating: 1A Max.
- Contact Resistance: 30 milliohms Max.
- Dielectric Withstanding: 750V AC
- Operating Temperature: -55°C to 85°C



ACTUAL SIZE

THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.

KEYSTONE ELECTRONICS CORP.			
www.keyelco.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900			
PART NAME			
USB A-TYPE DUAL-HORIZONTAL SOCKET			
MATERIAL			
AS NOTED			
FINISH		DRN BY	DATE
AS NOTED		NT	6.18.98
TOLERANCES		APPD	SCALE
DECIMAL ± .010 [± 0.25]		LN	2X
ANGULAR ± 1°			
UNLESS OTHERWISE SPECIFIED		CODE	DWG NO.
		C	922