

MAGNETIC INDICATOR

(Pin Type- Ø 12.0mm)

B


Shape

KX-1201C
KX-1205C
KX-1212C



Model Number	KX-1201C	KX-1205C	KX-1212C
Rated Voltage (VDC)	1.5	5.0	12.0
Operating Voltage Range (VDC)	1.2 ~ 3.0	4.0 ~ 7.0	8.0 ~ 16.0
Current Consumption (mA)	Max. 30	Max. 35	Max. 35
Sound Pressure Level (dBA)	Min. 80dBA(Typical 85) @10cm	Min. 85dBA(Typical 94)@10cm	
Rated Frequency (Hz)	2300 ± 300		
Operating Temperature (°C)	-20 ~ +60		
Storage Temperature (°C)	-30 ~ +70		
Weight (Gram)	2.0		
Material	PPO		


Dimension

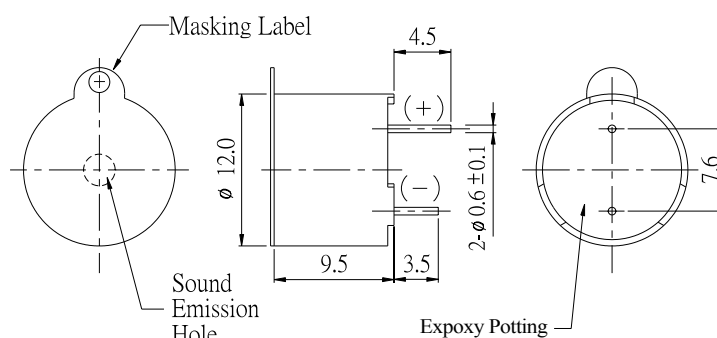


Tol : ±0.5 Unit : mm

Characteristic


KX-1201C

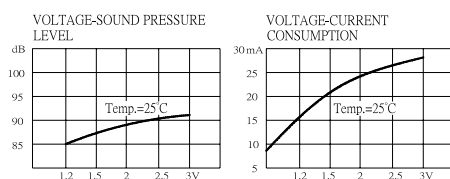

KX-1205C

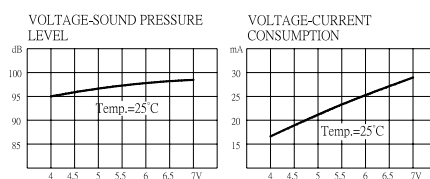

KX-1212C

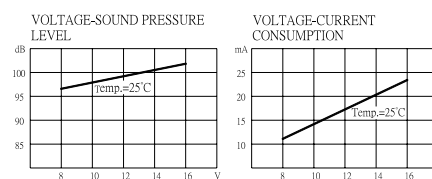

MAGNETIC INDICATOR

(Pin Type- Ø 16.0mm)

Shape


KX-1606C
KX-1612C



B

Model Number	KX-1606C	KX-1612C
Rated Voltage (VDC)	6.0	12.0
Operating Voltage Range (VDC)	4.0 ~ 7.0	8.0 ~ 16.0
Current Consumption (mA)	Max. 50	Max. 35
Sound Pressure Level (dBA)	Min. 85dBA(Typical 92) @10cm	
Rated Frequency (Hz)	2200 ± 300	
Operating Temperature (°C)	-20 ~ +60	
Storage Temperature (°C)	-30 ~ +70	
Weight (Gram)	7.0	
Material	Noryl SE1-J	

Dimension

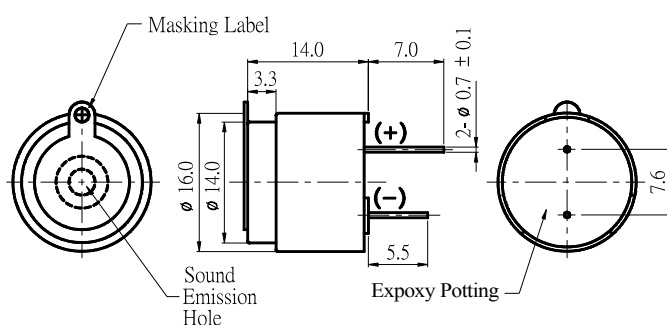


Tol : ±0.5 Unit : mm


Characteristic

KX-1606C

VOLTAGE-SOUND PRESSURE LEVEL




VOLTAGE-CURRENT CONSUMPTION



KX-1612C

VOLTAGE-SOUND PRESSURE LEVEL



VOLTAGE-CURRENT CONSUMPTION

