




- ⊙ Φ 19mm Diameter
- ⊙ Switch Rating: Ith:5A, UI:250V
- ⊙ Contact Configuration(□): 1NO1NC(11)
2NO2NC(22)
- ⊙ Operation Type(■): Momentary /
Latching(Z)
- ⊙ Ring illuminated
- ⊙ LED Color(Δ): R G Y O B W
- ⊙ LED Voltage(▲): 6V/12V/24V/110V/220V
- ⊙ The Crust Material(○): Stainless steel(S)
/Aluminium Alloy black anodized(A)
- ⊙ IP Degree: IP67, IK09



Specification		LAS1-AGQ-□■E/Δ/▲/○
The Front Shape		Flat Round
Terminal Type		Pin Terminal(2.8×0.5mm)
Switching		C(single-break fast-motion changeover contact)
Max. Switch Rating		Ith:5A UI:250VAC
Contact Resistance		≤ 50mΩ
Insulation Resistance		≥ 1000MΩ
Dielectric Intensity		2000VAC
Operating Temp		-20℃ ~ +55℃
Mechanical Life		1,000,000 cycles
Electrical Life		50,000 cycles
Panel Thickness		1 ~ 10mm
Torque		5 ~ 14Nm
Operation Pressure		3 ~ 5N
Operation Travel		About 3.1mm
IP Degree		IP67,IK08
Material	Contact	Silver Alloy
	Button	Stainless Steel / Aluminum alloy(Black)
	Body	Stainless Steel / Aluminum alloy(Black)
	Base	PBT
	RoHS	Made to order
Buzzer	Type	Ring Illuminated(LED)
	Rated Voltage	6V / 12V / 24V / 110V / 220V
Spec.	Color	R G Y O B W
	Sound Intensity	40000 hours

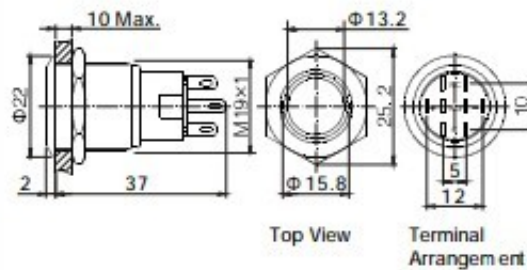