


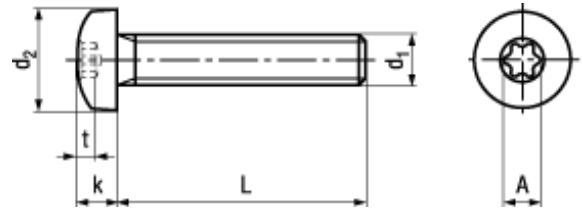

ISO 14583

**BN 20038****Vis à tête cylindrique bombée**

à six lobes internes, entièrement filetées

INOX A4

- Résistance à la traction min. 600 N/mm²
- Limite d'élasticité 0,2% min. 450 N/mm²

M1,6: n'est pas dans ISO 14583

Article#	d ₁	d ₂ max.	k max.		t max.	A~	L
3271682	M1,6	3,2	1,4	X5	0,6	1,49	3
3271683							4
3271684							5
3271686							6
3271687							8
3271688							10
3271689							12
3271690							16
3183823	M2	4	1,6	X6	0,77	1,75	4
3183824							5
3183825							6
3183827							8
3183828							10
3271691							12
3271693							16
3271694							20
3183830	M2,5	5	2,1	X8	1,04	2,4	3
3183831							4
3183832							5
3183833							6
3183834							8
3183835							10
3183836							12
3183837							16
3271695							20
3271696							25

M1,6: n'est pas dans ISO 14583

Article#	d ₁	d ₂ max.	k max.		t max.	A~	L
3271697	M3	5,6	2,4	X10	1,27	2,8	4
3183838							5
3183839							6
3183840							8
3183841							10
3183842							12
3183844							16
3183845							20
3183846							25
3183847							30
3271698							35
3271699							40
3183848	M4	8	3,1	X20	1,66	3,95	6
3183849							8
3183851							10
3183852							12
3183853							16
3183854							20
3183855							25
3183856							30
3271701							35
3271702							40
3271703							45
3271705							50
3271706	M5	9,5	3,7	X25	1,91	4,5	6
3183857							8
3183859							10
3183860							12
3183861							16
3183862							20
3183863							25
3183865							30
3183866							35
3183867							40
3271707							45
3271709							50
3271710							60
3183868	M6	12	4,6	X30	2,42	5,6	8
3183869							10
3183871							12
3183872							16

M1,6: n'est pas dans ISO 14583

Article#	d ₁	d ₂ max.	k max.		t max.	A~	L
3183873	M6	12	4,6	X30	2,42	5,6	20
3183874							25
3183875							30
3183876							35
3183877							40
3271711							45
3183878							50
3271712							60