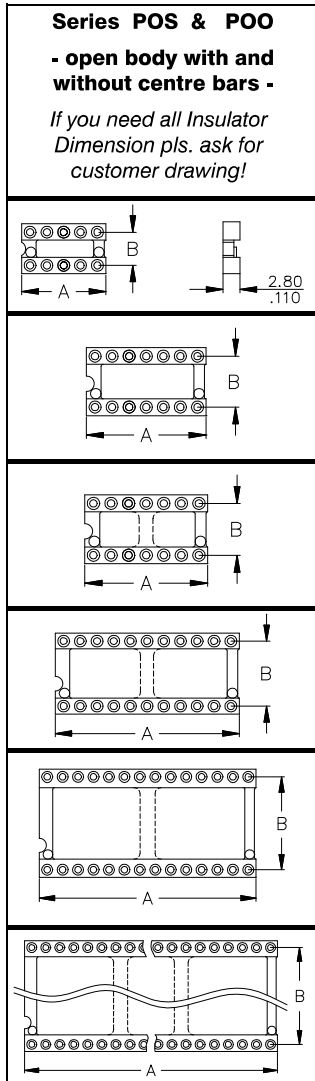
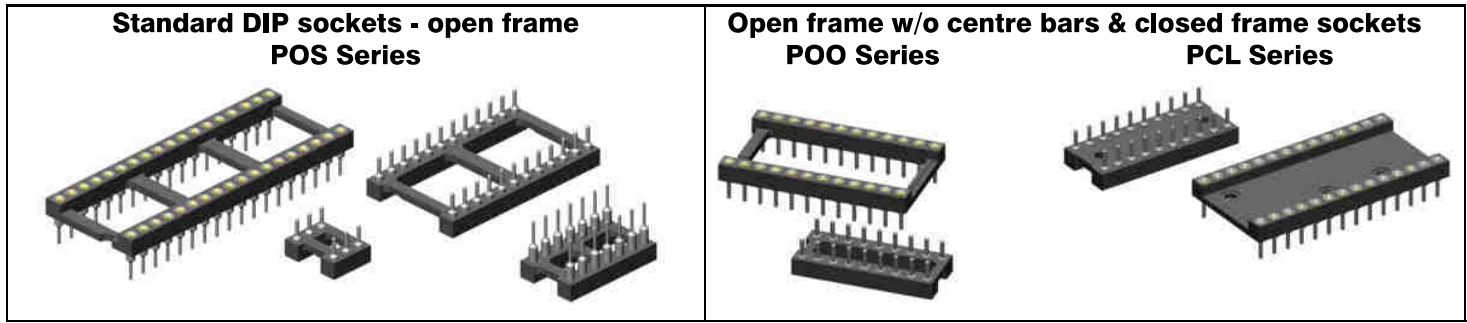
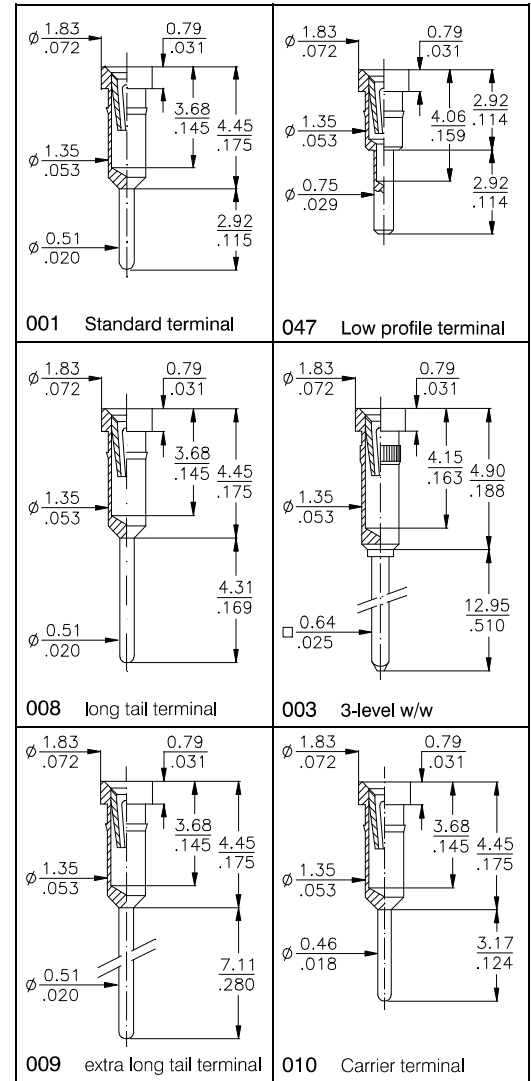




POS sockets in 7,62mm/.300" DIP spacing are either supplied with or without bars in the centre depending on plastic wafer availability. If you need sockets without centre bars, then please always order with POO instead of POS.

Pin	Dimension		Available Pinouts of Series		
	"A"	"B"	POS	POO	PCL
10	12,60	5,08 .200"	-	-	-210-
6	7,60	7,62 .300"	-306-	-	-
8	10,10		-308-	-	-
10	12,60		-310-	-	-
14	17,70		-314-	-314-	-314-
16	20,30		-316-	-316-	-316-
18	22,80		-318-	-318-	-318-
20	25,30	7,62 .300"	-320-	-320-	-320-
22	27,80		on request	on request	-
24	30,40		-324-	-324-	-
28	35,50		-328-	-328-	-
16	20,32	10,16 .400"	on request	on request	on request
22	27,80				
24	30,60				
24	30,50	15,24 .600"	-624-	-624-	on request
28	35,50		-628-	-628-	-628-
32	40,60		-632-	-632-	-632-
36	45,70		-636-	on request	-
40	50,80		-640-	-640-	-640-
48	60,96		-648-	on request	on request
64	81,26	22,86 .900"	on request	-	-



Specifications

PBT and high temp plastic depending on type.
See page 49 of this catalogue and contact factory for more details.

Insulator body

POS series = open insulator - see drawings above
POO series = open insulator w/o centre bars
PCL series = closed insulator body

Terminals











The **POS, POO** and **PCL** series are available with many different terminal styles. The most common terminal styles are shown on the right hand side of this page. Many other additional terminals can be found at the end of this catalogue. Custom design terminals are available on request.


How to order

XXX - x xx - S xxx - xx


Series POS POO PCL	DIP spacing (inch) see above table, dimension "B" Example: 3 for .300" insert the corresponding data of the POS, POO or PCL column	Nbr of contacts see above table Example: 06 for 6 Pin	Terminal style see drawings above or refer to pages 46 to 48 of this catalogue for other types.	Plating - 95 = tin/gold - 55 = gold/gold - 99 = tin/tin (tin leadfree)
---	---	---	--	--

Board Stacker Terminals

 079	 623	 062
 060	 063	 080
 084	 085	 088
 065	Many other terminals and custom specific terminal styles are available on request, or refer to the pages 46 to 48 of this catalogue.	

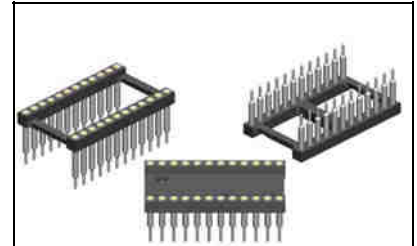


Application Examples

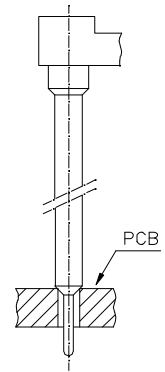

Possible Terminals:

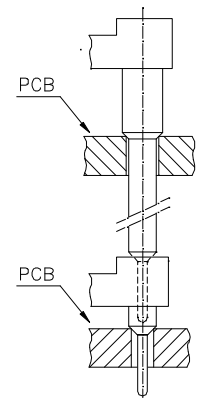060; 062; 063; 065; 079
080; 084; 085; 088; 623



Possible Terminals:

060; 062; 063; 079; 623

Specifications

See page 49 of this catalogue

How to order

XXX - x xx - S xxx - xx

Series

POS
POO
PCL

see page 14

DIP spacing

in inch
refer to table, dimension "B"
on page 14

Nbr of contacts

refer to table on page 14

insert the corresponding data of the POS, POO or PCL column










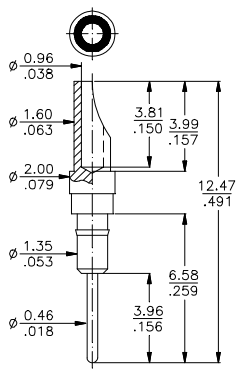
Terminal style


see drawings above
or refer to pages 46 to 48 of this catalogue for other types.

Plating


• **95** = tin/gold
(tin leadfree)
other on request

Board to Board Terminals

 077	 057	 037
 058	 059	 056
 542	 038	 353
 036	Many other terminals and custom specific terminal styles are available on request, or refer to the pages 46 to 48 of this catalogue.	

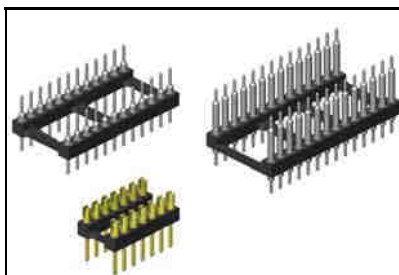


Application Examples



Possible Terminals:

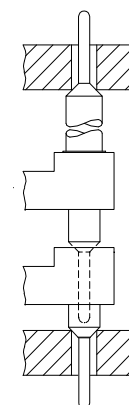037; 056; 057; 058; 059; 077
220; 221; 542; 543; 544; 562
770



Possible Terminals:

037; 056; 057; 058; 059
077; 542; 544; 562; 770

Specifications

See page 49 of this catalogue

How to order

XXX - xxx - Sxxx - xx

Series POS PCL see page 14	DIP spacing in inch refer to table, dimension "B" on page 14	Nbr of contacts refer to table on page 14	Terminal style see drawings above or refer to pages 46 to 48 of this catalogue for other types.	Plating - 55 = gold - 99 = tin (tin leadfree)
insert the corresponding data of the POS, POO or PCL column				