

DIP 14 SERIES REED RELAYS

MSS2 ■ MSS7 ■ PRMA ■ DSS7 ■ PRME ■ MVS2 ■ MVS7



SPECIFICATIONS

All parameters are at 25°C unless otherwise stated.
Operate voltage, release voltage, and coil resistance will change
approximately 0.4%/°C as ambient temperature varies.

DSS7
Molded 4 Pin
Dry Reed

PRME
Molded 8 Pin
Low profile
Dry Reed

PARAMETER	CONDITIONS	SYMBOL	MIN	TYP	MAX	MIN	TYP	MAX	UNITS
Contact Ratings									
Switching Voltage	Max DC/PeakAC Resistive	VL	-	-	200	-	-	200	Volts
Switching Current	Max DC/PeakAC Resistive	IL	-	-	0.5	-	-	0.5	Amps
Carry Current	Max DC/PeakAC Resistive	Ic	-	-	2	-	-	2	Amps
Contact Rating	Max DC/PeakAC Resistive		-	-	10	-	-	10	Watts
Life Expectancy	Signal Level 1.0 V 10mA Related Loads ⁽¹⁾		300	500	-	300	500	-	x10 ⁶ Ops
Static Contact Resistance	50mV, 10mA	CR	-	-	150	-	-	150	mΩ
Dynamic Contact Resistance	.5V, 50mA at 100Hz, 1.5 msec	DCR	-	N/A	-	-	N/A	-	mΩ
Contact Material			-	Ru	-	-	Ru	-	
Relay Specifications									
Insulation Resistance	Between all isolated pins at 100V, 25°C, 40% RH	IR	10 ¹⁰	10 ¹²	-	10 ¹⁰	10 ¹²	-	Ω
Capacitance	Across Open Contacts		-	0.7	1	-	0.8	1	pF
Dielectric Strength	Open Contact to Coil		-	1.5	2	-	1.5	2	pF
	Between Contacts		250	-	-	250	-	-	VDC/Peak AC
Operate Time, including bounce	Contacts to Coil	I/O	5600	-	-	1000	-	-	VDC/Peak AC
	At Nominal Coil Voltage	T _{OP}	-	0.25	0.5	-	0.25	1	ms
Release Time	10Hz Square Wave Zener-Diode Suppression	T _{REL}	-	0.25	0.5	-	0.25	0.5	ms
Environmental Ratings									
Storage Temperature		T _A	-40	-	+105	-40	-	+105	°C
Operating Temperature		T _O	-40	-	+80	-40	-	+80	°C
Soldering Temperature	Applied to pins, 5 sec. max.		-	-	260	-	-	260	°C
Vibration Resistance ⁽²⁾ (Survival)	5Hz - 500Hz	G	-	-	20	-	-	20	Gs
Shock Resistance (Survival)	11±1ms, 1/2 Sine Wave	S	-	-	100	-	-	100	Gs
Weight			-	1.5	-	-	1.5	-	grams

(1) Refer to life graphs

(2) Use caution not to exceed vibration resistance limits while ultrasonically cleaning relays with DYAD switches. Contact SRC Devices Engineering for more details/recommendations.

SPECIFICATIONS

All parameters are at 25°C unless otherwise stated.
Operate voltage, release voltage, and coil resistance will change approximately 0.4%/°C as ambient temperature varies.

MVS2
8 Pin DIP
Wetted Contacts⁽³⁾

MVS7
4 Pin DIP
Wetted Contacts⁽³⁾

PARAMETER	CONDITIONS	SYMBOL	MIN	TYP	MAX	MIN	TYP	MAX	UNITS
Contact Ratings									
Switching Voltage	Max DC/PeakAC Resistive	VL	-	-	1000 ⁽¹⁾	-	-	1000 ⁽¹⁾	Volts
Switching Current	Max DC/PeakAC Resistive	IL	-	-	2	-	-	2	Amps
Carry Current	Max DC/PeakAC Resistive	IC	-	-	3	-	-	3	Amps
Contact Rating	Max DC/PeakAC Resistive		-	-	50	-	-	50	Watts
Life Expectancy	Signal Level 1.0 V 10mA		1000	-	-	1000	-	-	x10 ⁶ Ops
	50V, 1A		-	2	-	-	2	-	x10 ⁶ Ops
	500V, 100mA		-	50	-	-	50	-	x10 ⁶ Ops
	Related Loads ⁽²⁾								
Static Contact Resistance	50mV, 10mA	CR	-	-	100	-	-	100	mΩ
Contact Material			-	Hg	-	-	Hg	-	
Hg Content			-	40	-	-	40	-	mgrams
Relay Specifications									
Insulation Resistance	Between all isolated pins at 100V, 25°C, 40% RH	IR	10 ¹⁰	10 ¹²	-	10 ¹⁰	10 ¹²	-	Ω
Capacitance	Across Open Contacts		-	0.7	-	-	0.7	-	pF
	Upper Contact to Coil		-	1.2	-	-	1.5	-	pF
	Closed Contact to Coil		-	3.2	-	-	2.5	-	pF
Dielectric Strength	Open Contacts		1400	-	-	2000	-	-	VDC/Peak AC
	Contacts to Coil	I/O	1400	-	-	5600	-	-	VDC/Peak AC
Operate Time	At Nominal Coil Voltage	T _{OP}	-	1.5	2.5	-	1.5	2.5	ms
Release Time	10Hz Square Wave		-	1	2.5	-	1	2.5	ms
	Zener-Diode Suppression	T _{REL}	-	1	2.5	-	1	2.5	ms
Environmental Ratings									
Storage Temperature		T _A	-40	-	+105	-40	-	+105	°C
Operating Temperature		T _O			+260			+260	°C
Soldering Temperature	Applied to pins, 5 sec. max.		-38	-	+85	-38	-	+85	°C
Vibration Resistance ⁽²⁾	10Hz - 500Hz	G	-	-	10	-	-	10	Gs
(Survival)									
Shock Resistance	11±1ms, 1/2 Sine Wave	S	-	-	30	-	-	30	Gs
(Survival)									
Weight			-	2.1	-	-	2.1	-	grams

⁽¹⁾ Current limited up to 5mA, minimum 20 million operations; for further information, consult factory

⁽²⁾ Refer to life graphs

⁽³⁾ Relay contains mercury wetted contacts and must be mounted vertically. Pin 1 is up.

DIP 14 SERIES REED RELAYS









MSS2 ■ MSS7 ■ PRMA ■ DSS7 ■ PRME ■ MVS2 ■ MVS7



COIL SPECIFICATIONS

	Contact Form	Coil Voltage			Coil Resistance			Operate Voltage			Release Voltage			Nominal Input Power		
Units		Volts			Ω			Volts			Volt			mW		
Conditions					+/- 10% (25°C)			Must operate by (25°C)			Must release by (25°C)					
Part #		Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max
MSS2 1A05	1-Form-A		5	11	126	140	154			3.75	0.5				179	
MSS2 1A12	1-Form-A		12	21	450	500	550			9	1				288	
MSS2 1A24	1-Form-A		24	44	1935	2150	2365			18	2				268	
MSS7 1A05	1-Form-A		5	11	126	140	154			3.75	0.5				179	
MSS7 1A12	1-Form-A		12	21	450	500	550			9	1				288	
MSS7 1A24	1-Form-A		24	43	1935	2150	2365			18	2				268	
PRMA 1A05	1-Form-A		5	21	450	500	550			3.75	0.8				50	
PRMA 1A12	1-Form-A		12	30	900	1000	1100			9	1				144	
PRMA 1A24	1-Form-A		24	44	1935	2150	2365			18	2				268	
PRMA 1B05	1-Form-B		5	6	450	500	550			3.75	0.8				50	
PRMA 1B12	1-Form-B		12	14.5	900	1000	1100			9	1				144	
PRMA 1B24	1-Form-B		24	29	1935	2150	2365			18	2				268	
PRMA 1C05	1-Form-C		5	12	180	200	220			3.75	0.8				125	
PRMA 1C12	1-Form-C		12	18	450	500	550			9	1				288	
PRMA 1C24	1-Form-C		24	32	1935	2150	2365			18	2				268	
PRMA 2A05	2-Form-A		5	11	126	140	154			3.75	0.8				179	
PRMA 2A12	2-Form-A		12	21	450	500	550			9	1				288	
PRMA 2A24	2-Form-A		24	44	1935	2150	2365			18	2				268	
PRMA 10037	1-Form-A		5	15	342	380	418			3.75	0.8				66	
PRMA 10038	1-Form-A		12	19	477	530	583			9	1				272	
PRMA 10039	1-Form-A		24	32	1800	2000	2200			18	2				288	
DSS7 1A05	1-Form-A		5	21	450	500	550			3.75	0.8				50	
DSS7 1A12	1-Form-A		12	30	900	1000	1100			9	1				144	
DSS7 1A24	1-Form-A		24	44	1935	2150	2365			18	2				268	
PRME 25005	1-Form-A		5	19	450	500	550			3.8	0.8				50	
PRME 15005	1-Form-A		5	15	342	380	418			3.5	1				66	
PRME 15002	1-Form-A		12	19	477	530	583			8	1				272	
PRME 15003	1-Form-A		24	32	1800	2000	2200			16	2				288	
MVS2 1A05(A,B)	1-Form-A		5	7	94.5	105	116			3.75	0.5				238	
MVS2 1A12(A,B)	1-Form-A		12	15	450	500	550			9	1				288	
MVS2 1A24(A,B)	1-Form-A		24	30	1935	2150	2365			18	2				268	
MVS7 1A05(S)	1-Form-A		5	7	94.5	105	116			3.75	0.5				238	
MVS7 1A12(S)	1-Form-A		12	15	450	500	550			9	1				288	
MVS7 1A24(S)	1-Form-A		24	30	1935	2150	2365			18	2				268	

PERFORMANCE GRAPHS

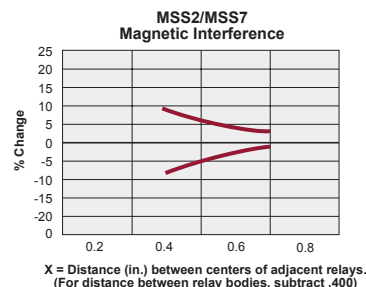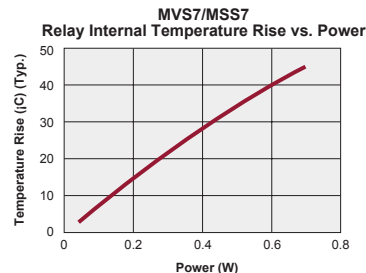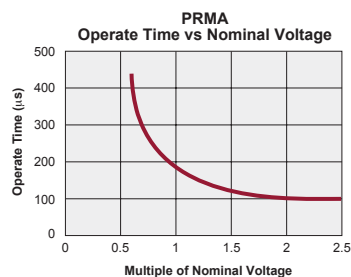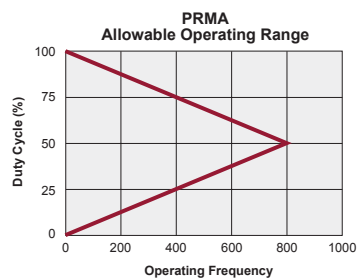

DIP 14 SERIES REED RELAYS


MSS2 ■ MSS7 ■ PRMA ■ DSS7 ■ PRME ■ MVS2 ■ MVS7




DIMENSIONS
mm
(inches)

MECHANICAL DIMENSIONS

PRMA

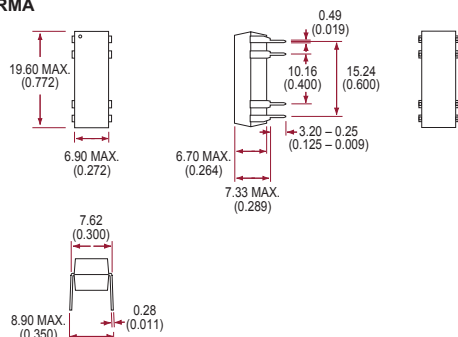


PRMA 1A




Options:
Diode - pin #2 is positive
Electrostatic shield - pin 9

PRMA 1B




Options:
Diode - pin #2 is positive
Electrostatic shield - pin 9

PRMA 1C




Options:
Diode - pin #2 is positive
Electrostatic shield - pin 9

PRMA 2A




Options:
Diode - pin #2 is positive
Electrostatic shield - pin 9

PRMA 10037/10038/10039




Options:
Diode - pin #2 is positive
Electrostatic shield - pin 9

MVS2/MSS2




* MVS2 only must be mounted vertically with pin #1 UP.

PRME

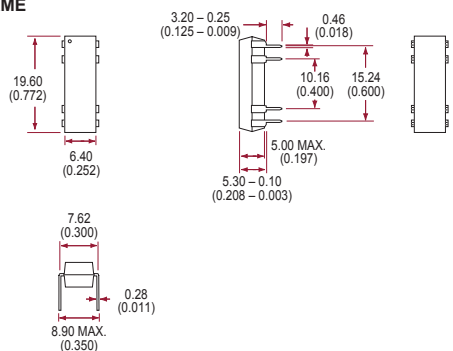


PRME




Options:
Diode - pin #13 is positive
Electrostatic shield - pin 9

DSS7

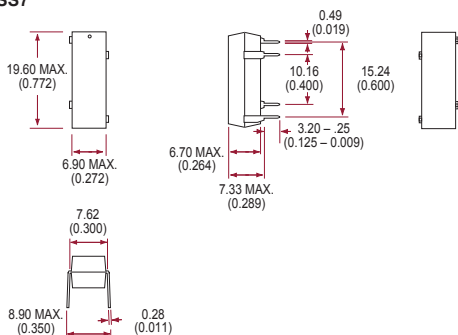


DSS7



MVS must be mounted vertically. Pin #1 is up.

ORDERING INFORMATION

A complete part number is represented by the digits below. For example, the PRMA1A05 is a model 2 PRMA relay with a 1-Form A contact form, a nominal voltage of 5V and no extra options.

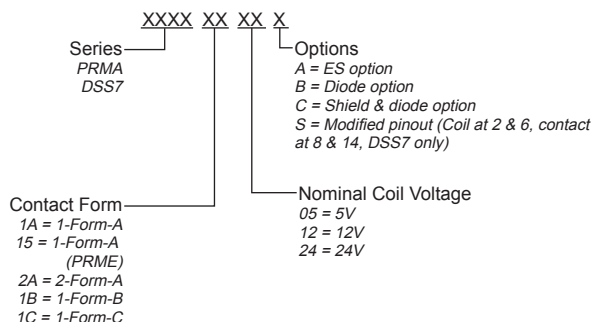

Ordering Information Special Schematics

PRME 25005
 PRME 15005
 PRME 15002
 PRME 15003

PRMA 10037
 PRMA 10038
 PRMA 10039

*These represent
full part numbers.*