

MINIATURE COAXIAL SPDT SWITCHES

failsafe type

Connectors	PART NUMBER	Actuator Voltage (V)	Max. V.S.W.R.	Max. Loss (dB)	Min. Isolation (dB)	Impedance (Ω)	Fig.
DC – 2 GHz							
SMB	R 555 112	12	1.20	0.2	80	50	1
	R 555 113	26	1.20	0.2	80	50	1
SMC	R 555 212	12	1.20	0.2	80	50	1
	R 555 213	26	1.20	0.2	80	50	1
SMA	R 555 412	12	1.20	0.2	80	50	1
	R 555 413	26	1.20	0.2	80	50	1
DC – 18 GHz							
SMA	R 565 412	12	1.50	0.5	60	50	1
	R 565 413	26	1.50	0.5	60	50	1
BMA *	R 565 612	12	1.50	0.5	60	50	2
	R 565 613	26	1.50	0.5	60	50	2
DC – 26.5 GHz							
SMA	R 565 512	12	1.60	0.7	50	50	1
	R 565 513	26	1.60	0.7	50	50	1

All these models can be fitted with :
 - TTL compatible driver
 - Auxiliary indicators

* OSP™ compatible

OSP a trademark of M/A-COM OMNI SPECTRA, Inc

MINIATURE COAXIAL SPDT SWITCHES

Fig. 1

A	1.500 (38.1)
B	1.319 (33.5)
C	.878 (22.3)
D	.445 (11.3)
E*	.500 (12.7)
F	.094 (2.4)
G	.133 (3.4)
H	1.330 (28.7)
I	.122 (3.1)

E* = thickness

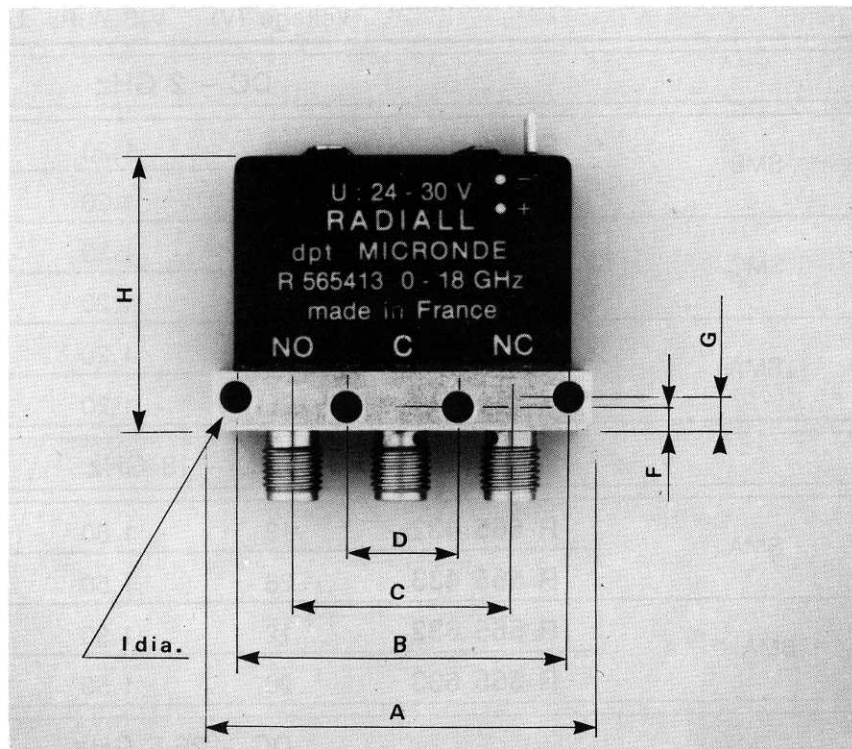


Fig. 2

A	2.000 (50.8)
B	.878 (22.3)
C	1.338 (34)
D	1.653 (42)
E*	.500 (12.7)
F	.059 (1.5)
G	1.130 (28.7)
H	.122 (3.1)

E* = thickness

