



PAGE 1/2	ISSUE 1442B	SERIES BR2	PART NUMBER R605550000
----------	-------------	------------	------------------------

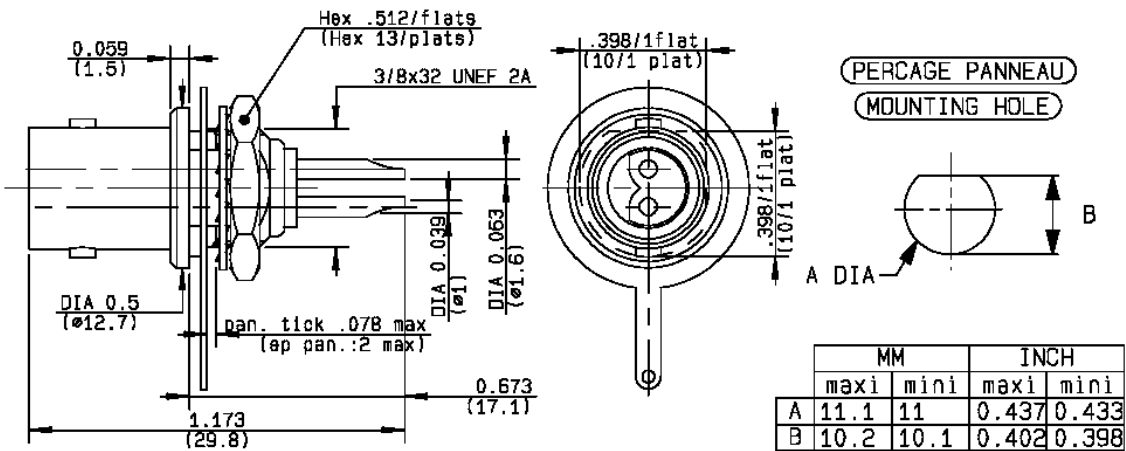

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (µm)
Body	BRASS	NICKEL
Center contact	BERYLLIUM COPPER	SILVER
Outer contact	-	-
Insulator	POLYAMID 6/6 (NYLON)	-
Gasket	-	-
Others parts	-	-
-	-	-
-	-	-

PAGE 2/2

ISSUE **1442B**

SERIES **BR2**

PART NUMBER **R605550000**

PACKAGING

Standard	Unit	Other
1	Contact us	Contact us

ELECTRICAL CHARACTERISTICS

Impedance	50	Ω
Frequency	0-0.5	GHz
VSWR	- + 0,0000	x F(GHz) Maxi
Insertion loss	-	$\sqrt{F}$ (GHz) dB Maxi
RF leakage	- (	- F(GHz) dB Maxi
Voltage rating	-	Veff Maxi
Dielectric withstanding voltage	1500	Veff mini
Insulation resistance	-	M Ω mini

MECHANICAL CHARACTERISTICS

Center contact retention		
Axial force – Mating End	-	N mini
Axial force – Opposite end	-	N mini
Torque	-	N.cm mini
Recommended torque		
Mating	-	N.cm
Panel nut	-	N.cm
Mating life	500	Cycles mini
Weight	0,0000	g

ENVIRONMENTAL

Operating temperature	-40/+100	°C
Hermetic seal	-	Atm.cm3/s
Panel leakage	-	

SPECIFICATION

OTHER CHARACTERISTICS

Assembly instruction:

Others: