


POWER RELAYS RT

Page
6


POWER RELAYS RT1

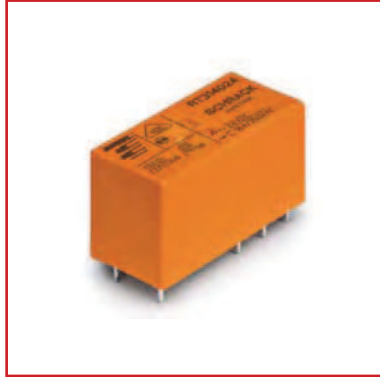


SCHRACK-INFO

- 1 pole 12 / 16 A, DC- or AC coil
- 1 CO contact or 1 NO contact
- Sensitive coil 400mW / 0.75 VA
- 5 kV / 10 mm coil-contact, protection class II (VDE 0700)
- Reliable disconnection according to VDE 0160 in connection with socket YRT78626
- Ambient temperature 85°C (DC-coil)
- Module height only 15.7 mm
- Gold plated contacts available
- PCB and screwed socket available
- For usage in boiler and garage door control systems, time relays, vending machines, interface modules

DIMENSIONS (mm)

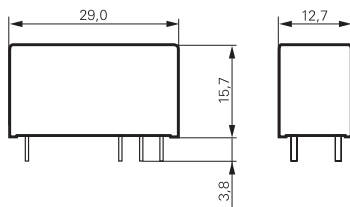

BREAKING CAPACITY

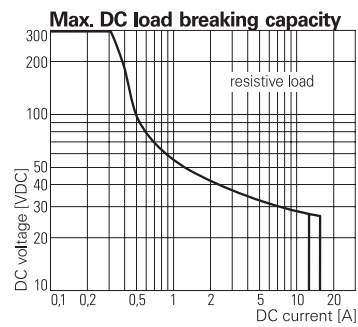


APPROVALS




PCB LAYOUT / TERMINAL ASSIGNMENT


12 A, pinning 3.5 mm




1 CO contact




1 NO contact




12 A, pinning 5 mm




1 CO contact




1 NO contact




16 A, pinning 5 mm



1 CO contact



1 NO contact








Page
7

R	T					
---	---	--	--	--	--	--

Type

Further technical data on www.schrack.at

CONTACTS	PINNING	COIL	CONTACT MATERIAL	TYPE	AVAILABLE	STORE	ORDER NO.
1 CO, 12A	3,5 mm	12V DC	AgNi 90/10	PREL-SL-1-UKE-M1-012G-12-3,5			RT114012
1 CO, 12A	3,5 mm	24V DC	AgNi 90/10	PREL-SL-1-UKE-M1-024G-12-3,5			RT114024
1 CO, 12A	3,5 mm	24V AC	AgNi 90/10	PREL-SL-1-UKE-M1-024W-12-3,5			RT114524
1 CO, 12A	5 mm	12V DC	AgNi 90/10	PREL-SL-1-UKE-M1-012G-12-5,0			RT214012
1 CO, 12A	5 mm	24V DC	AgNi 90/10	PREL-SL-1-UKE-M1-024G-12-5,0			RT214024
1 CO, 12A	5 mm	230V AC	AgNi 90/10	PREL-SL-1-UKE-M1-230W-12-5,0			RT214730
1 CO, 16A	5 mm	5V DC	AgNi 90/10	PREL-SL-1-UKE-M1-005G-16-5,0			RT314005
1 CO, 16A	5 mm	6V DC	AgNi 90/10	PREL-SL-1-UKE-M1-006G-16-5,0			RT314006
1 CO, 16A	5 mm	12V DC	AgNi 90/10	PREL-SL-1-UKE-M1-012G-16-5,0			RT314012
1 CO, 16A	5 mm	24V DC	AgNi 90/10	PREL-SL-1-UKE-M1-024G-16-5,0			RT314024
1 NO, 16A	5 mm	24V DC	AgNi 90/10	PREL-SL-1-AKE-M1-024G-16-5,0			RT334024
1 CO, 16A	5 mm	48V DC	AgNi 90/10	PREL-SL-1-UKE-M1-048G-16-5,0			RT314048
1 CO, 16A	5 mm	110V DC	AgNi 90/10	PREL-SL-1-UKE-M1-110G-16-5,0			RT314110
1 CO, 16A	5 mm	24V AC	AgNi 90/10	PREL-SL-1-UKE-M1-024W-16-5,0			RT314524
1 CO, 16A	5 mm	230V AC	AgNi 90/10	PREL-SL-1-UKE-M1-230W-16-5,0			RT314730
1 CO, 16A	5 mm	24V DC	AgNi 90/10	PREL-SL-1-UKE-M1-024G-16-5,0			RT315024
1 CO, 16A	5 mm	230V AC	AgNi 90/10	PREL-SL-1-UKE-M1-230W-16-5,0			RT315730
1 CO, 16A	5 mm	24V DC	AgNi 90/10	PREL-SW-1-UKE-M1-024G-16-5,0			RTD14024

Additional opportunity to pick up goods at every Schrack store!