


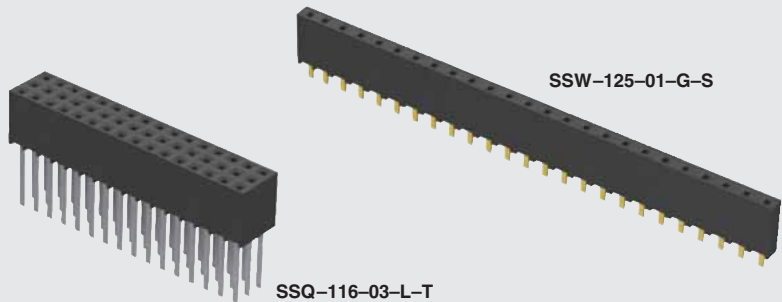

SSW-125-01-G-S

SSQ-116-03-L-T

(2.54 mm) .100"

THROUGH-HOLE .025" SQ POST SOCKET

SPECIFICATIONS

For complete specifications see www.samtec.com?SSW or www.samtec.com?SSQ

Insulator Material:

Black Liquid Crystal Polymer (-S & -D) or Black High Temperature Thermoplastic (-T)

Contact Material:

Phosphor Bronze

Plating:

Au or Sn over

50μ" (1.27 μm) Ni

Current Rating (TSW/SSW):

5.7 A per pin

(1 pin powered per row)

Current Rating (SSQ/TSW):

6.3 A per pin

(1 pin powered per row)

Operating Temp Range:

-55°C to +125°C with Gold

-55°C to +105°C with Tin

Contact Resistance: 10 mΩ

Insertion Depth:

(3.68 mm) .145" to

(6.35 mm) .250"

Insertion Force:

(Single contact only)

(-S plating)

Standard= 6 oz (1.67 N) avg

((0.64 mm) .025" SQ pin);

SSW Low Insertion Force=

3 oz (0.83 N) avg

SSQ Low Insertion Force=

3.3 oz (0.92 N) avg

Normal Force:

Standard= 125 grams (4.4 N)

Withdrawal Force:

(Single contact only)

(-S plating)

Standard= 5 oz (1.39 N) avg

((0.64 mm) .025" SQ pin);

SSW Low Insertion Force=

2.6 oz (0.72 N) avg

SSQ Low Insertion Force=

2.9 oz (0.81 N) avg

Max Cycles:

100 with 10μ" (0.25 μm) Au

Voltage Rating:

550 VAC mated with TSW

RoHS Compliant:

Yes

Lead-Free Solderable:

Wave only

Mates With:

TSW, MTSW, MTLW,

EW, ZW, TSS, ZSS,

TSM, TSSH, HTSS




TYPE STRIP

SSW = Solder Tail

SSQ = Square Tail


PIN CENTERS

-1 = (2.54 mm) .100" Centers



NO. PINS PER ROW

01
thru
50

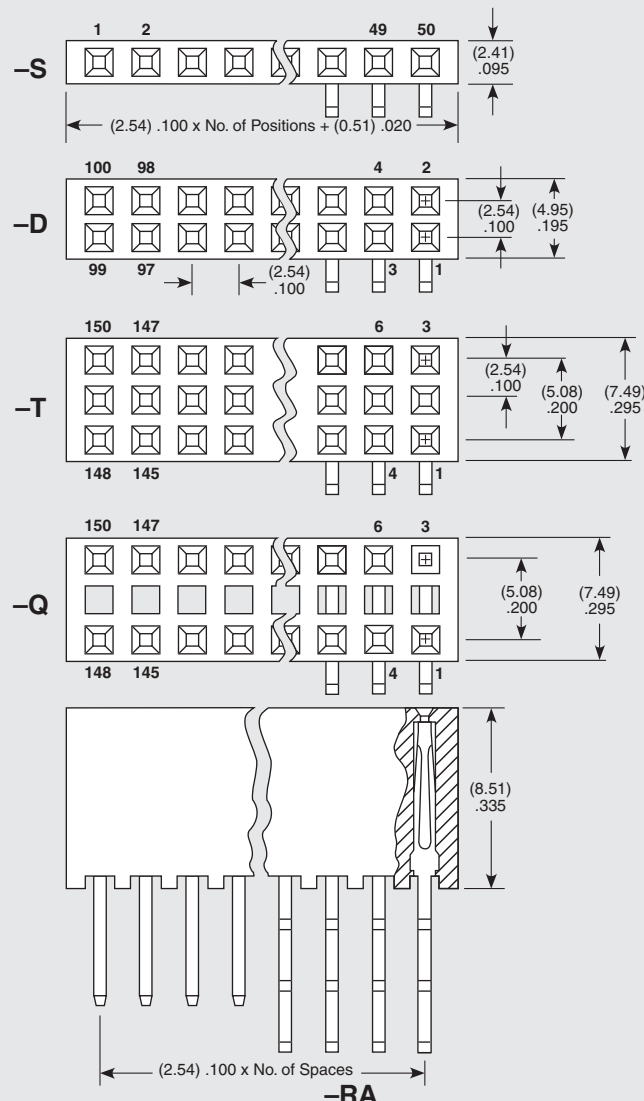


RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality



Note:
Some lengths, styles and options are non-standard, non-returnable.

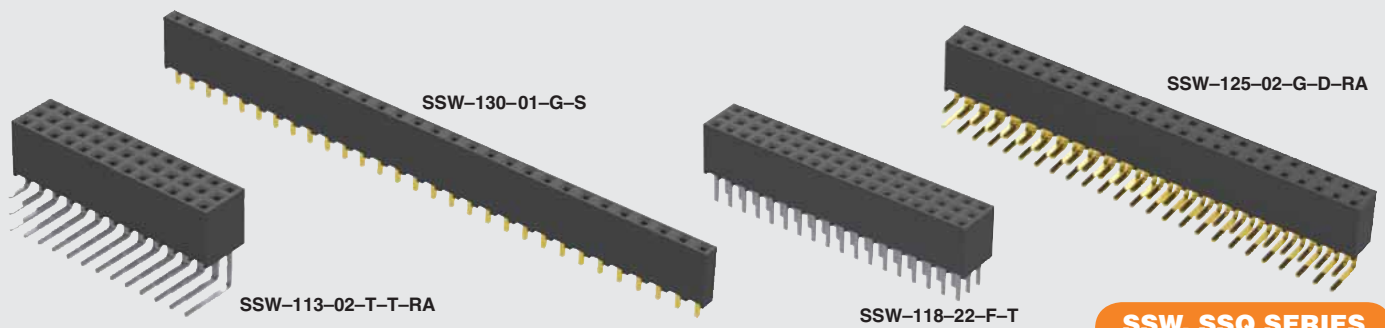

SSW, SSQ SERIES

LEAD STYLE

PLATING OPTION

ROW OPTION

TAIL OPTION

OTHER OPTION

-F

= Gold flash on contact,
Matte Tin on tail

-L

= 10 μ " (0.25 μ m) Gold on contact,
Matte Tin on tail

-G

= 20 μ " (0.51 μ m) Gold on contact,
Gold flash on tail

-T

= Matte Tin
(-T N/A on LIF contacts)

-S

= Single Row

-P

= Single Row
(Notched to mate with LCW)
36 pins max

-D

= Double Row

-T

= Triple Row

-Q

= Double Row
.200" (5.08 mm) row space
(Outer rows filled only)

-RA

= Right Angle
(Leave blank for
straight pin
version)

-LL

= Locking Lead



Two leads per strip crimped in opposite
directions on or near centerline.
Available on tails from (2.29 mm) .090"
to (7.87 mm) .310" only. N/A with single
row 1 or 2 positions.

-“XXX”

= Polarized
(Specify “XXX” as position number)

ALSO AVAILABLE (MOQ Required)


- Other platings
- Notch option
- Contact Samtec.

Straight Pin Versions (Specify “LEAD STYLE” from chart)

LEAD STYLE		SINGLE DOUBLE OR TRIPLE A
Standard Insertion Force	Low Insertion Force*	
-01	-21	(2.64) .104
-02	-22	(4.93) .194
-03	-23	(10.00) .394
-04	-24	(14.83) .584
-06**	N/A	(3.15) .124

* LIF N/A with Tin Plating

**Style -06 N/A with SSQ

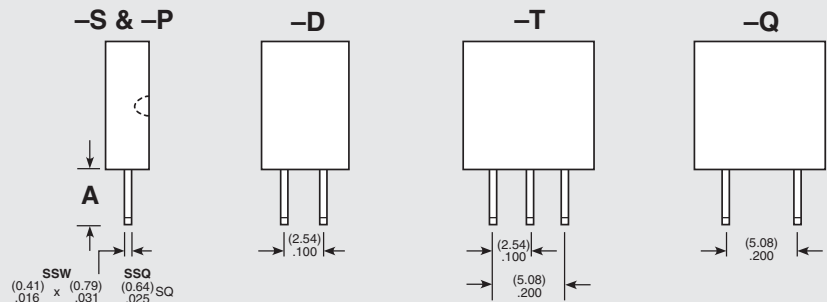

Right Angle Versions (Specify “LEAD STYLE” from chart)

LEAD STYLE		SINGLE	DOUBLE	TRIPLE
		(-S & -P)	(-D)	(-T & -Q)
Standard Insertion Force	Low Insertion Force*	A	A	A
-02	-22	(2.54) .100	(2.54) .100	(2.54) .100
-03	-23	(7.62) .300	(7.62) .300	N/A
-04	-24	(12.45) .490	N/A	N/A

*LIF N/A with Tin Plating

