


### Features

- ◆ DIP-24 package with industry standard footprint
- ◆ Wide 2:1 input voltage range
- ◆ Input filter meets EN 55022, class A
- ◆ Extended operating temperature range: -40°C to +85°C
- ◆ Remote On/Off
- ◆ Shielded metal casing with insulated baseplate
- ◆ Lead free design, RoHS compliant
- ◆ 3-year product warranty

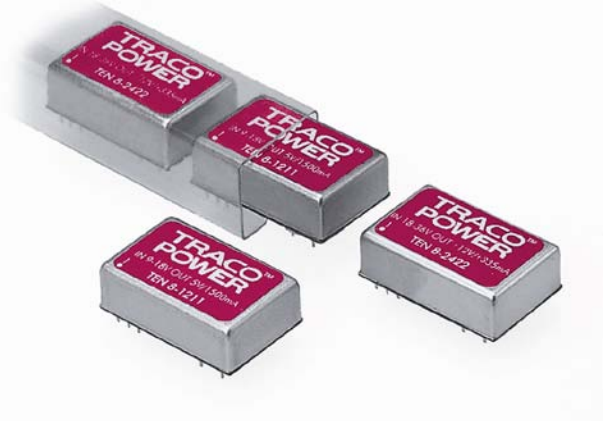

The TEN 8 series is a family of high performance 8 Watt dc/dc-converter modules featuring wide 2:1 input voltage ranges in a DIP-24 package with industry standard footprint. A very high efficiency allows an operating temperature range of -40°C to +85°C. A built-in EMI input filter complies with EN 55022, class A without external components. Further standard features include remote On/Off and short-circuit protection.

Typical applications for these converters are battery operated equipment, instrumentation, communication and industrial electronics, everywhere where isolated, tightly regulated voltages are required and space is limited on the PCB.

### Models

| Order code | Input voltage range             | Output voltage | Output current max. | Efficiency typ. |
|------------|---------------------------------|----------------|---------------------|-----------------|
| TEN 8-1210 | 9 – 18 VDC<br>(12 VDC nominal)  | 3.3 VDC        | 2'000 mA            | 80 %            |
| TEN 8-1211 |                                 | 5 VDC          | 1'500 mA            | 83 %            |
| TEN 8-1212 |                                 | 12 VDC         | 665 mA              | 88 %            |
| TEN 8-1213 |                                 | 15 VDC         | 535 mA              | 87 %            |
| TEN 8-1221 |                                 | ±5 VDC         | ±800 mA             | 83 %            |
| TEN 8-1222 |                                 | ±12 VDC        | ±335 mA             | 87 %            |
| TEN 8-1223 |                                 | ±15 VDC        | ±265 mA             | 85 %            |
| TEN 8-2410 | 18 – 36 VDC<br>(24 VDC nominal) | 3.3 VDC        | 2'000 mA            | 80 %            |
| TEN 8-2411 |                                 | 5 VDC          | 1'500 mA            | 83 %            |
| TEN 8-2412 |                                 | 12 VDC         | 665 mA              | 86 %            |
| TEN 8-2413 |                                 | 15 VDC         | 535 mA              | 85 %            |
| TEN 8-2421 |                                 | ±5 VDC         | ±800 mA             | 82 %            |
| TEN 8-2422 |                                 | ±12 VDC        | ±335 mA             | 86 %            |
| TEN 8-2423 |                                 | ±15 VDC        | ±265 mA             | 85 %            |
| TEN 8-4810 | 36 – 75 VDC<br>(48 VDC nominal) | 3.3 VDC        | 2'000 mA            | 80 %            |
| TEN 8-4811 |                                 | 5 VDC          | 1'500 mA            | 83 %            |
| TEN 8-4812 |                                 | 12 VDC         | 665 mA              | 86 %            |
| TEN 8-4813 |                                 | 15 VDC         | 535 mA              | 86 %            |
| TEN 8-4821 |                                 | ±5 VDC         | ±800 mA             | 85 %            |
| TEN 8-4822 |                                 | ±12 VDC        | ±335 mA             | 87 %            |
| TEN 8-4823 |                                 | ±15 VDC        | ±265 mA             | 87 %            |

## Input Specifications

|                                |         |                                                                                                                                                                                      |             |
|--------------------------------|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| Input current (no load)        |         | 12 Vin models:                                                                                                                                                                       | 15 mA typ.  |
|                                |         | 24 Vin models:                                                                                                                                                                       | 15 mA typ.  |
|                                |         | 48 Vin models:                                                                                                                                                                       | 10 mA typ.  |
| Input current (full load)      | 12 Vin; | 3.3 VDC models:                                                                                                                                                                      | 720 mA typ. |
|                                | 12 Vin; | other output models:                                                                                                                                                                 | 800 mA typ. |
|                                | 24 Vin; | 3.3 VDC models:                                                                                                                                                                      | 360 mA typ. |
|                                | 24 Vin; | other output models:                                                                                                                                                                 | 400 mA typ. |
|                                | 48 Vin; | 3.3 VDC models:                                                                                                                                                                      | 180 mA typ. |
|                                | 48 Vin; | other output models:                                                                                                                                                                 | 200 mA typ. |
| Surge voltage (100 msec. max.) |         | 12 Vin models:                                                                                                                                                                       | 36 V max..  |
|                                |         | 24 Vin models:                                                                                                                                                                       | 50 V max..  |
|                                |         | 48 Vin models:                                                                                                                                                                       | 100 V max.  |
| Conducted noise (input)        |         | EN 55022 level A, FCC part 15, level A<br>For 12 Vin models with external input capacitor:<br>4.7 $\mu$ F / 25 V 1210 MLCC                                                           |             |
| ESD (electrostatic discharge)  |         | EN 61000-4-2, air $\pm$ 8 kV, contact $\pm$ 6 kV,<br>perf. criteria A                                                                                                                |             |
| Radiated immunity              |         | EN 61000-4-3, 10 V/m, perf. criteria A                                                                                                                                               |             |
| Fast transient / Surge         |         | EN 61000-4-4, $\pm$ 2 kV, perf. criteria A<br>EN 61000-4-5, $\pm$ 1 kV perf. criteria A<br>With external input capacitor e.g. Nippon<br>chemi-con KY 220 $\mu$ F, 100 V, ESR 48 mOhm |             |
| Conducted immunity             |         | EN 61000-4-6, 10 Vrms, perf. criteria A                                                                                                                                              |             |

## Output Specifications

|                                                         |                                        |                                             |
|---------------------------------------------------------|----------------------------------------|---------------------------------------------|
| Voltage set accuracy                                    |                                        | $\pm$ 1 %                                   |
| Regulation                                              | – Input variation Vin min. to Vin max  | 0.2 % max.                                  |
|                                                         | – Load variation 0 – 100 %             |                                             |
|                                                         | single output models:                  | 1 % max.                                    |
|                                                         | dual output models:                    | 1 % max.                                    |
| – Load cross variation 25 % / 100 %                     |                                        | 5 % max.                                    |
| Temperature coefficient                                 |                                        | 0.02 %/K                                    |
| Ripple and noise (20 MHz Bandwidth)                     |                                        | 50 mVpk-pk typ.                             |
| Start up time (nominal Vin and constant resistive load) |                                        | 700 ms max.                                 |
| Transient response (25% load step change)               |                                        | 200 $\mu$ s typ.                            |
| Short circuit protection                                |                                        | indefinite (automatic recovery)             |
| Over load protection                                    |                                        | 150 % of Iout max. typ. foldback            |
| Capacitive load                                         | 3.3 Vout models:                       | 3300 $\mu$ F max.                           |
|                                                         | 5 Vout models / $\pm$ 5 Vout models:   | 1600 $\mu$ F max. / $\pm$ 1000 $\mu$ F max. |
|                                                         | 12 Vout models / $\pm$ 12 Vout models: | 350 $\mu$ F max. / $\pm$ 160 $\mu$ F max.   |
|                                                         | 15 Vout models / $\pm$ 15 Vout models: | 240 $\mu$ F max. / $\pm$ 100 $\mu$ F max.   |

## General Specifications

|                           |                    |                    |
|---------------------------|--------------------|--------------------|
| Temperature ranges        | – Operating        | –40°C to +85°C     |
|                           | – Case temperature | +100°C max.        |
|                           | – Storage          | –55°C to +105°C    |
| Derating                  |                    | 3.3 %/K above 70°C |
| Humidity (non condensing) |                    | 95 % rel H max.    |

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.


## General Specifications

|                                                                    |                                                                                                                                         |
|--------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| Reliability, calculated MTTF (MIL-HDBK-217F ground benign, @+25°C) | >1.2 Mio h                                                                                                                              |
| Isolation voltage (60sec.) – Input/Output                          | 1500 VDC                                                                                                                                |
| Isolation capacitance – Input/Output                               | 300 pF max.                                                                                                                             |
| Isolation Resistance – Input/Output                                | >1000 MOhm                                                                                                                              |
| Switching frequency                                                | 300 kHz typ. (pulse width modulation PWM)                                                                                               |
| Vibration and thermal shock                                        | MIL-STD-810E                                                                                                                            |
| Safety standards                                                   | UL/cUL 60950-1, IEC/EN 60950-1                                                                                                          |
| Safety approvals – UL/cUL                                          | <a href="http://www.ul.com">www.ul.com</a> -> certifications -> File E188913                                                            |
| Remote On/Off                                                      | On: 3.5 ... 12 VDC or open circuit<br>Off: 0 ... 1.2 VDC or short circuit pin 1 and pin 2/3<br>Off idle current: 2.5 mA                 |
| Environmental compliance – Reach<br>– RoHS                         | <a href="http://www.tracopower.com/products/ten8-reach.pdf">www.tracopower.com/products/ten8-reach.pdf</a><br>RoHS directive 2002/95/EC |

## Physical Specifications

|                            |                        |
|----------------------------|------------------------|
| Casing material            | copper, nickel plated  |
| Baseplate material         | non conductive plastic |
| Potting material           | epoxy (UL94V-0 rated)  |
| Weight                     | 17 g (0.60 oz)         |
| Soldering temperature max. | 265°C / 10 sec.        |

## Outline Dimensions

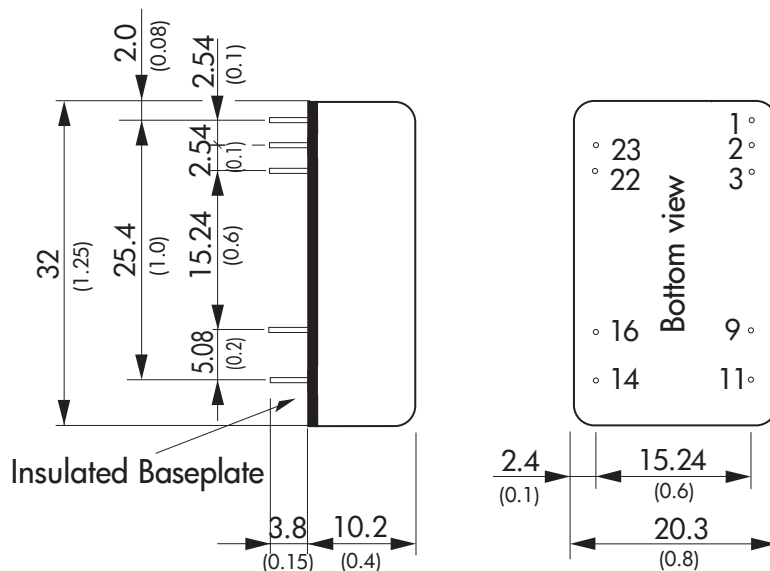

| Pin-Out |               |               |
|---------|---------------|---------------|
| Pin     | Single        | Dual          |
| 1       | Remote On/Off | Remote On/Off |
| 2       | -Vin (GND)    | -Vin (GND)    |
| 3       | -Vin (GND)    | -Vin (GND)    |
| 9       | No con.       | Common        |
| 11      | No con.       | -Vout         |
| 14      | +Vout         | +Vout         |
| 16      | -Vout         | Common        |
| 22      | +Vin (Vcc)    | +Vin (Vcc)    |
| 23      | +Vin (Vcc)    | +Vin (Vcc)    |

Specifications can be changed any time without notice.