


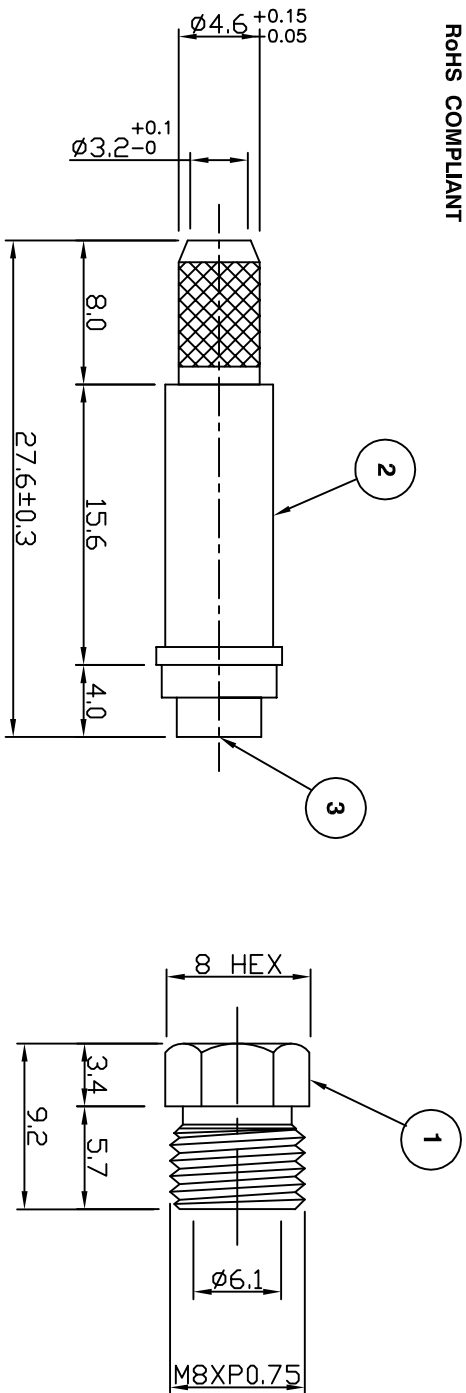

Electrical Characteristics

Nominal Impedance: 50 ohms
Frequency Range: DC to 2 GHz
VSWR: 1.3:1 maximum




Mechanical Characteristics

Mating Cycles: 500 cycles minimum

Environmental Characteristics

Temperature Range: -55 °C to +85 °C

PART	DESCRIPTION
1	Nut
2	Body
3	Dielectric
4	Contact
5	Ferrule

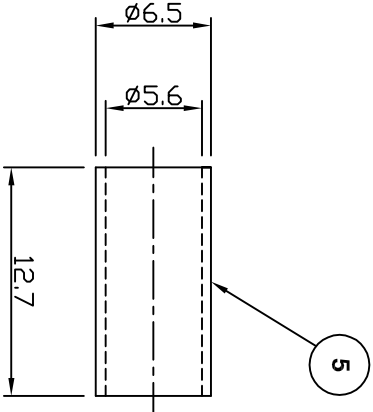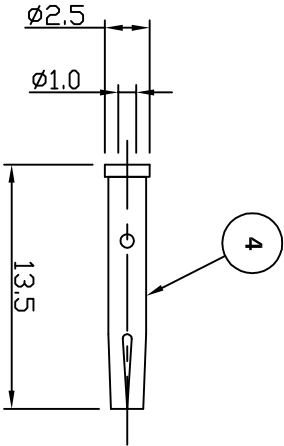

Up Issue	SN	4	12 Feb 03
CAD Issue	SN	3	10 Jun 02
Dimensional changes	AT	2	04 April 96
First Issue	AT	1	22 Sept 95

For stripping and assembly instructions see Drawing Number: VAIR3101



Connectivity Solutions
7-13 Russel Way,
Widford Industrial Estate,
Chelmsford,
Essex, CM1 3AA, UK
Tel: +44 (0) 1245 359515
Fax: +44 (0) 1245 358938

SCALE: Not To Scale
DIMENSIONS: mm
TOLERANCES:
± 0.2mm unless
otherwise stated

DRAWN BY: S Nash
CHECKED BY: P Couzens
APPROVED BY: P Couzens
DATE: 12 Feb 03

TITLE:

FME Crimp Jack for RG58

PART NUMBER:

VR30-2051

PAGE: 1 of 1