





LED 0805 BLUE SPEC

■ Features

1. Mono-color type.
2. Dimensions: 2.0(L) x 1.25(W) x 0.8(H) mm, being ultra-small size.
3. Compatible with automatic placement equipment.
4. Compatible with infrared and vapor phase reflow solder process.


Resin

■ Dimensions

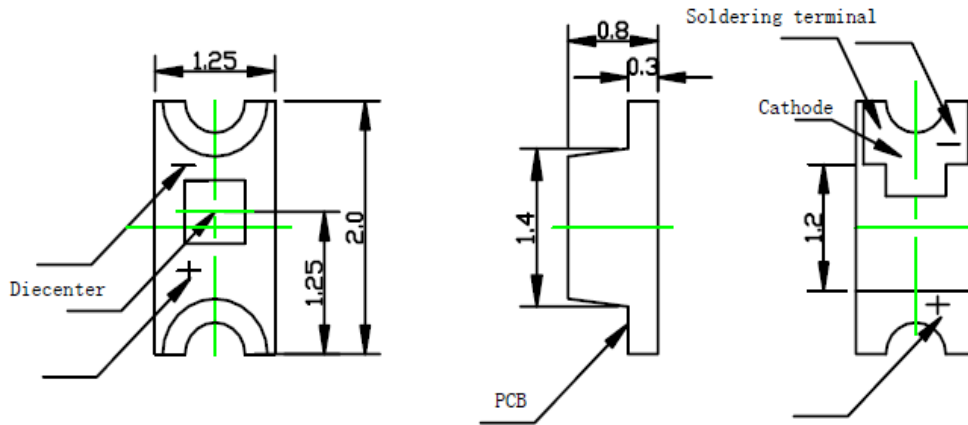


Notes:

1. Tolerance ± 0.1
2. Unit: mm

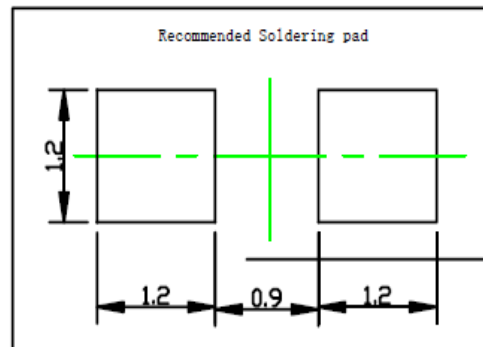

■ Far Field Pattern

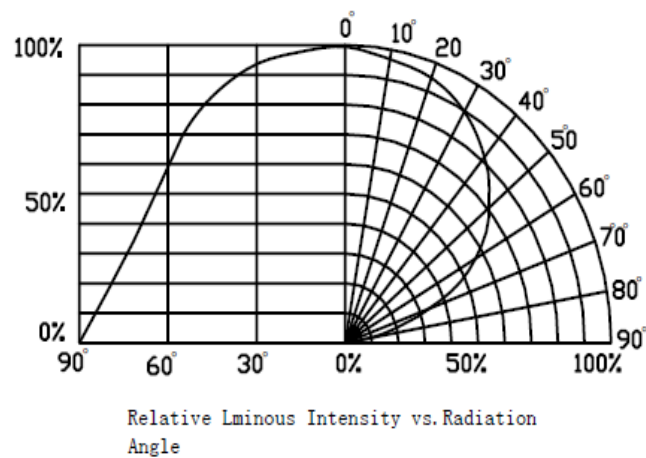



LED 0805 BLUE SPEC

■ Descriptions

PART NO	Chip		Lens Color
	Material	Emitted Color	
XC-0805BVC	InGaN	Blue	WATER CLEAR

■ Absolute Maximum Ratings (Ta = 25℃)

Items	Symbol	Absolute maximum Rating	Unit
Forward Current(DC)	I _F	50	mA
Peak Forward Current*	I _{FP}	100	mA
Reverse Voltage	V _R	5	V
Operation Temperature	T _{opr}	-40 ~ +95	℃
Storage Temperature	T _{stg}	-40 ~ +100	℃
Lead Soldering Temperature	T _{sol}	Max.260℃ for 5 sec Max. (3mm from the base of the epoxy bulb)	

*Pulse width ≤ 0.1msec duty ≤ 1/10

■ Typical Electrical & Optical Characteristics (Ta = 25℃)

Items	Symbol	Condition	Min.	Typ.	Max.	Unit
Power Dissipation	PD	I _F = 20mA	---	64	---	mW
Forward Voltage	V _F	I _F = 20mA	2.8	---	3.6	V
Reverse Current	I _R	V _R = 5V	---	---	5	μA
Dominant Wavelength	λ _D	I _F = 20mA	460	---	475	nm
Luminous Intensity	I _V	I _F = 20mA	---	100	---	mcd
50% Power Angle	2θ _{1/2}	I _F = 20mA	---	120	---	Deg

■ Typical Electrical/Optical Characteristics Curves (Ta=25° Unless Otherwise Noted)

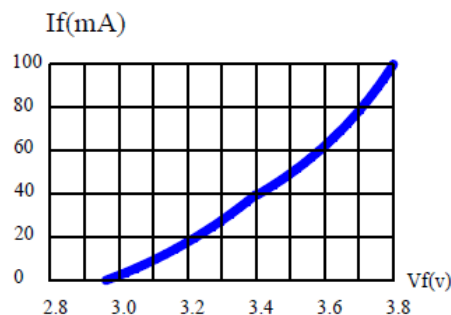


Fig. 1 Forward Current vs Forward Voltage

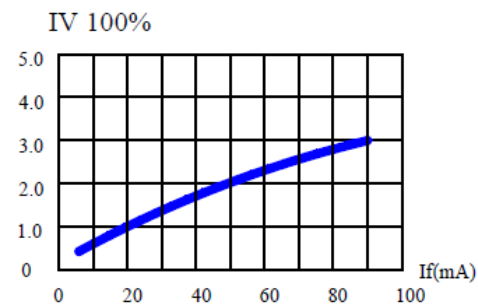


Fig. 2 Relative Luminous Intensity vs Forward Voltage

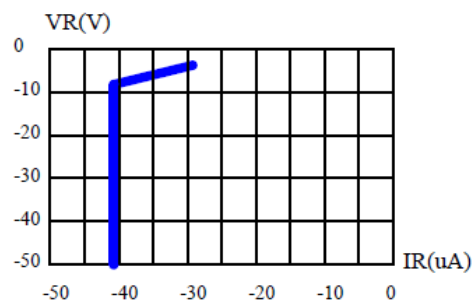


Fig. 3 Reverse Current vs Reverse Voltage

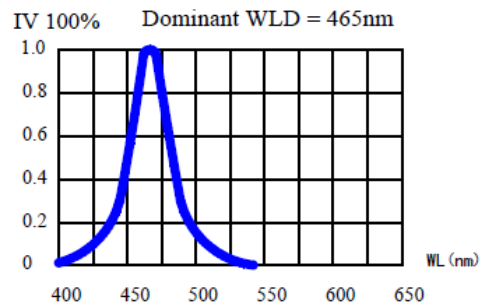


Fig. 4 Relative Luminous Intensity vs Wavelength
If(mA)



LED 0805 BLUE SPEC

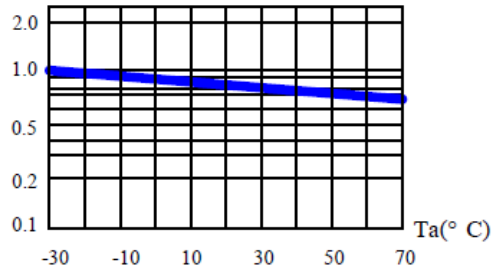


Fig. 5 Relative Luminous Intensity vs Ambient Temperature

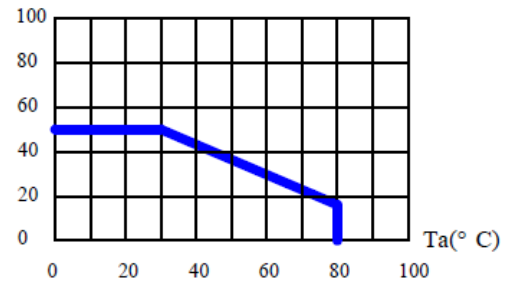


Fig. 6 Maximum Forward Current vs Ambient Temperature