

Tournevis SlimLine



☞ Manche avec revêtement SoftFinish® grand confort avec protection antidérapante.

☞ Acier entièrement trempé, avec isolation de haute qualité directement moulée sur la lame.

☞ Lames jusqu'à 33% plus minces grâce à l'isolation intégrée permettant d'atteindre et d'actionner les éléments vissés et ressorts situés en profondeur.

☞ Sécurité lors de travaux sur ou à proximité de pièces sous tension jusqu'à 1500 VDC et 1000 VAC .

☞ Outil d'actionnement pour bornes à ressort permettant d'atteindre et d'actionner les éléments vissés et ressorts situés en profondeur.

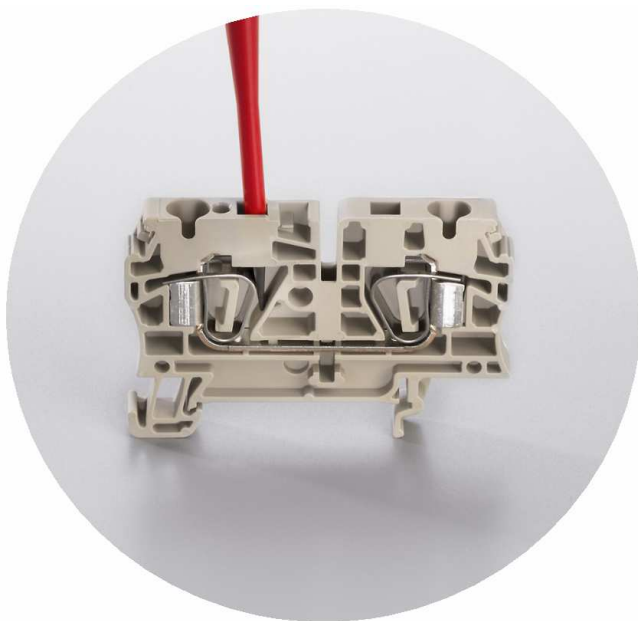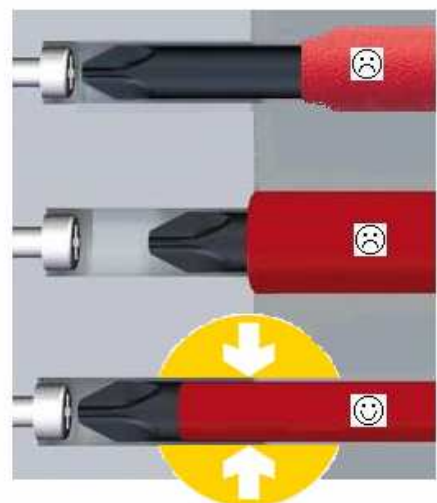



AC 1000V
Testé suivant:
IEC 60900: 2004

Lors du travail sous tension,
 Respectez les prescriptions
 Nationales de sécurité et
 de préventions des accidents




Electrical Connectivity | SlimLine screwdriver

VDE-insulated screwdriver SlimLine

VDE-insulated screwdriver, for working on live parts up to 1000 VAC and 1500 VDC. DIN EN 60900, IEC 900, Safety tested „GS“, each piece tested. Bit made from fully hardened, high-alloy chromium-vanadium-molybdenum steel, gun-metal finish.


A blade that is up to 33 % thinner

The SlimLine design allows you to reach deeply inset fittings and tension clamp terminals.



SDI SL S

VDE insulated slot-head screwdriver, SDI SL DIN 7437, ISO 2380/2, drive output acc. to DIN 5264, ISO 2380/1. SoftFinish grip



Type	Blade type	Size / AF	a	b	c	Order No.
SDI SL 0.6x3.5x100	B		0.6	3.5	100	1274660000
SDI SL 0.8x4.0x100	B		0.8	4.0	100	1274670000
SDI SL 1.0x4.5x125	B		1.0	4.5	125	1274680000
SDI SL 1.2x6.5x150	B		1.2	6.5	150	1274690000

SDIK SL PH

VDE-insulated crosshead screwdriver, Phillips type, SDIK SL PH DIN 7438, ISO 8764/2-PH, output acc. to ISO 8764-PH, SoftFinish grip



SDIK SL PH1	1	80	1274710000
SDIK SL PH2	2	100	1274720000

SDIK SL PZ


VDE-insulated crosshead screwdriver Pozidrive type, SDIK SL PZ DIN 7438, ISO 8764/2-PZ, output acc. to ISO 8764-PZ, SoftFinish grip



SDIK SL PZ1	1	80	1274730000
SDIK SL PZ2	2	100	1274740000

SDIS SL 2.5-5.5/PH/1/2

6-part set: VDE insulated slotted and crosshead PH screwdriver set

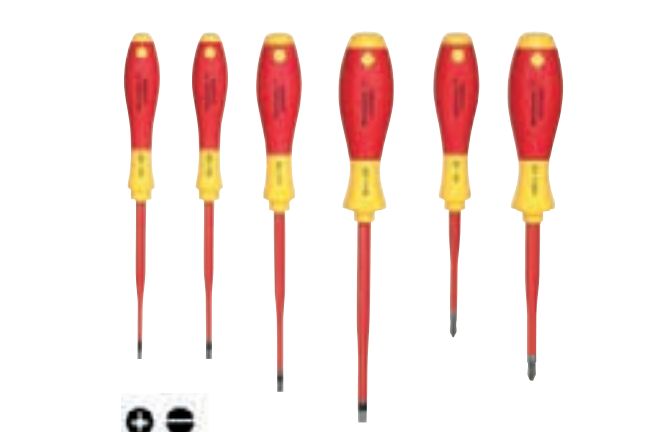

SDI SL 0.6x3.5x100	B	0.6	3.5	100	
SDI SL 0.8x4.0x100	B	0.8	4.0	100	
SDI SL 1.0x5.5x125	B	1.0	4.5	125	
SDI SL 1.2x6.5x150	B	1.2	6.5	150	
SDIK SL PH1	1			80	
SDIK SL PH2	2			100	
SDIS SL 2.5-5.5/PH1/2					1274750000